



Vacuum Control

Catalog 2013 - 2014

VACUUM GAUGES, FITTINGS AND
FEEDTHROUGHS



Table of Contents

VACUUM GAUGES

Capacitance Diaphragm Gauge

Porter™ CDG020D.....	A1
----------------------	----

SKY® Capacitance Diaphragm Gauge

CDG025D, CDG025D-S.....	A5
CDG025D-X3	A9
CDG045D	A13
CDG100D	A18
CDG160D, CDG200D	A24
AllCeramic™ CDG025-C	A29
AllCeramic™ CDG160A-C / CDG160A-CS	A31

Bayard-Alpert Pirani Gauge

BPG400	A34
BPG402-S	A38

High Pressure Hot Ionization Pirani Gauge

HPG400	A42
--------------	-----

Bayard-Alpert Pirani Capacitance Diaphragm Gauge

TripleGauge® BCG450.....	A46
--------------------------	-----

Pirani Standard Gauge

PSG500/-S, PSG502-S, PSG510-S, PSG512-S	A51
PSG550, PSG552, PSG554	A55

Pirani Capacitance Diaphragm Gauge

PCG550, PCG552, PCG554.....	A61
-----------------------------	-----

Penning Gauge

PEG100	A67
--------------	-----

Inverted Magnetron Pirani Gauge

MPG400/401	A70
------------------	-----

Vacuum Gauge Controllers

VGC401, VGC402, VGC403.....	A73
PGD400	A75

Vacuum Switch

VSA100A	A77
VSA200, VSD200	A79
VSC150A	A83

Calibration Service

Vacuum Gauges	A86
---------------------	-----

Inspection Documents Service

Vacuum Control	A87
----------------------	-----

VACUUM Feedthroughs

Rotary Feedthroughs ISO-KF / ISO-K

FRH DN 16 - DN 63	B1
-------------------------	----

Rotary Feedthroughs CF

FRU DN 16 - DN 40	B3
-------------------------	----

Rotary/Linear Motion Feedthroughs ISO-KF

FCH DN 16 - DN 40	B5
-------------------------	----

Linear Motion Feedthroughs CF

FPU DN 16 - DN 40	B7
-------------------------	----

Electrical Feedthroughs

DN 16 ISO-KF	B9
DN 40 ISO KF	B11
DN 16 CF	B13
DN 40 CF	B15
DN 40 ISO KF	B17

Coaxial Feedthroughs ISO-KF / CF-F

BNC / MHV DN 16 - 40	B19
----------------------------	-----

ISO-F Fixed Flange Components

Flange Components	C39
-------------------------	-----

UHV CF Components

Connection Elements	C42
Seals	C44
Flanges	C46
Pipe Fittings	C51
Bellows / Hose with Flanges, Compensator	C54
Transition Pieces	C55
Protective Lids	C56

Inspection Documents Service

Vacuum Control	A87
----------------------	-----

Website

ISO-F Fixed Flange Components

Flange Components	C39
-------------------------	-----

UHV CF Components

Connection Elements	C42
Seals	C44
Flanges	C46
Pipe Fittings	C51
Bellows / Hose with Flanges, Compensator	C54
Transition Pieces	C55
Protective Lids	C56

Inspection Documents Service

Vacuum Control	A87
----------------------	-----

Website

Vacuum Gauges

VACUUM GAUGES

Capacitance Diaphragm Gauge

Porter™ CDG020D A1

SKY® Capacitance Diaphragm Gauge

CDG025D, CDG025D-S A5

CDG025D-X3 A9

CDG045D A13

CDG100D A18

CDG160D, CDG200D A24

AllCeramic™ CDG025-C A29

AllCeramic™ CDG160A-C / CDG160A-CS A31

Bayard-Alpert Pirani Gauge

BPG400 A34

BPG402-S A38

High Pressure Hot Ionization Pirani Gauge

HPG400 A42

Bayard-Alpert Pirani Capacitance Diaphragm Gauge

TripleGauge® BCG450 A46

Pirani Standard Gauge

PSG500/-S, PSG502-S, PSG510-S, PSG512-S A51

PSG550, PSG552, PSG554 A55

Pirani Capacitance Diaphragm Gauge

PCG550, PCG552, PCG554 A61

Penning Gauge

PEG100 A67

Inverted Magnetron Pirani Gauge

MPG400/401 A70

VACUUM GAUGES (continued)

Vacuum Gauge Controllers

VGC401, VGC402, VGC403	A73
PGD400	A75

Vacuum Switch

VSA100A	A77
VSA200, VSD200	A79
VSC150A	A83

Calibration Service

Vacuum Gauges	A86
-------------------------	-----

Inspection Documents Service

Vacuum Control	A87
--------------------------	-----

Website

Capacitance Diaphragm Gauge

Porter™ CDG020D

The INFICON Porter CDG020D Capacitance Diaphragm Gauge is a high quality, cost effective, gas type independent absolute pressure sensor. The Porter is designed for stable long time performance in industrial environments. The ceramic sensor provides excellent span stability over many years of maintenance free operation paired with outstanding zero stability. The corrosion resistant single material sensor architecture guarantees excellent temperature compensation. Fully digital electronics and small footprint defines flexibility in any integration. The Porter vacuum gauge is humble, reliable, always available and never overpaid.




Advantages

- Excellent span stability – gas type independent
- Corrosion resistant alumina sensor
- Compact, smallest size in its class
- Easy integration, any mounting orientation
- Digital signal processing
- Maintenance free

Applications

- Vacuum coating
- Vacuum monitoring
- Sterilization
- Food & packaging
- Vacuum oven, puller
- Analytical
- Chemical vacuum processes

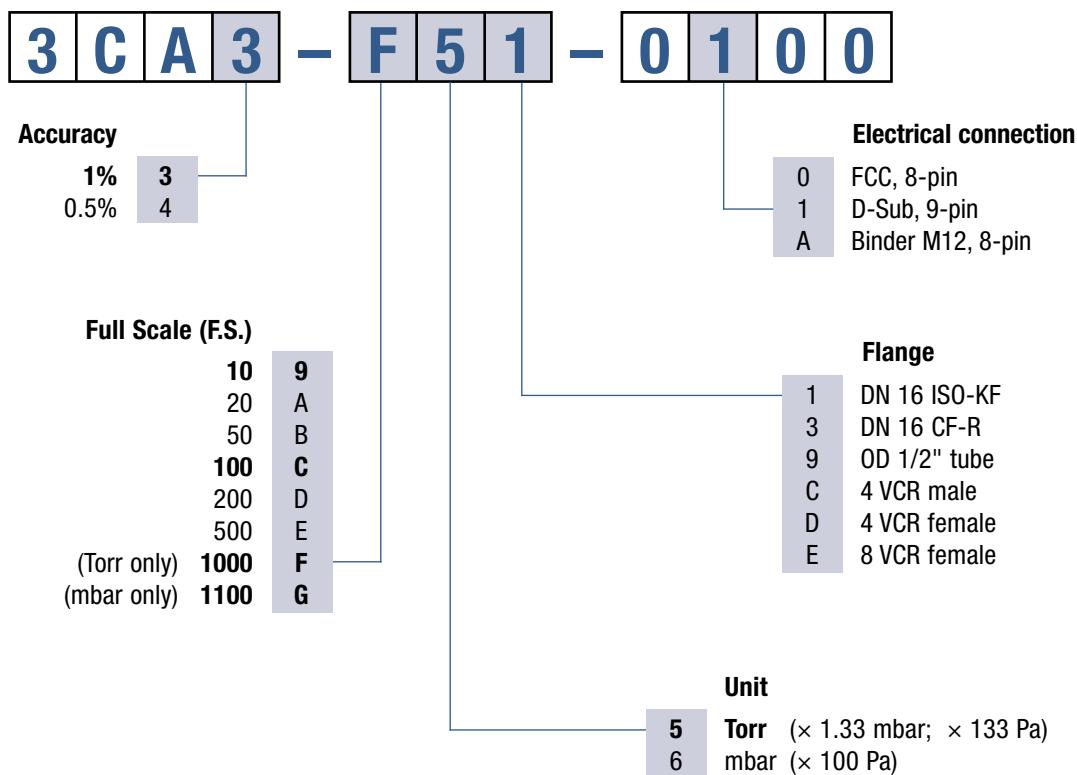Porter™ CDG020D - continued**Ordering Information**

bold = standard products

Other flange types and full scales (F.S.) on request.

Porter™ CDG020D - continued**Specifications**


Measurement Range F.S. (Full Scale)	Torr Pa mbar	1000 133,322 1333	100 13,332 133	10 1,333 13.3	500 66,661 667	200 26,664 267	50 6,666 66.7	20 2,666 27	110,000 1100	10,000 100
Accuracy ¹⁾										
3CA3-xxx-xxx	% of reading						1			
3CA4-	% of reading						0.5			
Temperature effect										
On zero		% F.S./°C					0.02			
On span		% of reading/°C					0.02			
Resolution		% F.S.					0.05			
Long time stability		% F.S./year					0.5			
Lowest reading		% F.S.					0.05			
Temperature compensated range	°C						+10 ... +50			
Admissible temperature										
Operation (ambient)	°C						0 ... +70			
Bakeout at flange ²⁾	°C						≤110			
Storage	°C						-20 ... +85			
Ambient humidity limits	% RH						<80%, non-condensing			
Supply voltage	V DC						+13 ... +30			
Power consumption	W						≤0.3			
Output signal (analog)	V DC						0 ... +10			
Max. output voltage	V DC						+10.24			
Response time ³⁾	ms						100			
Degree of protection							IP 40			
Standards										
CE conformity							EMC (EN 61000-6-2, EN 61000-6-3), EN 61010-1 & RoHS			
ETL certification							UL 61010-1, CAN/CSA C22.2 No. 61010-1			
SEMI compliance							SEMI S2			
Electrical connection										
3CAx-xxx-0000							FCC, 8-pin			
-0100							D-Sub, 9-pin, male			
-0A00							Binder M12, 8-pin, male			
Materials exposed to vacuum							Aluminum oxide ceramic (Al_2O_3), stainless steel 1.4404 (AISI 316L),			
Tightness	mbar l/s						<1x10 ⁻⁹			
Mounting orientation							any			
Internal volume										
DN 16 ISO-KF	cm ³ (inch ³)						3.7 (0.226)			
4 VCR male	cm ³ (inch ³)						6.1 (0.372)			
4 VCR female	cm ³ (inch ³)						5.6 (0.342)			
8 VCR female	cm ³ (inch ³)						5.1 (0.311)			
Weight										
DN 16 ISO-KF	g						~110			
4 VCR male	g						~123			
4 VCR female	g						~133			
8 VCR female	g						~159			
Maintenance							none			

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.²⁾ Non operation³⁾ Increase 10 ... 90% F.S.

Porter™ CDG020D - continued

Dimensions

mm (inch)

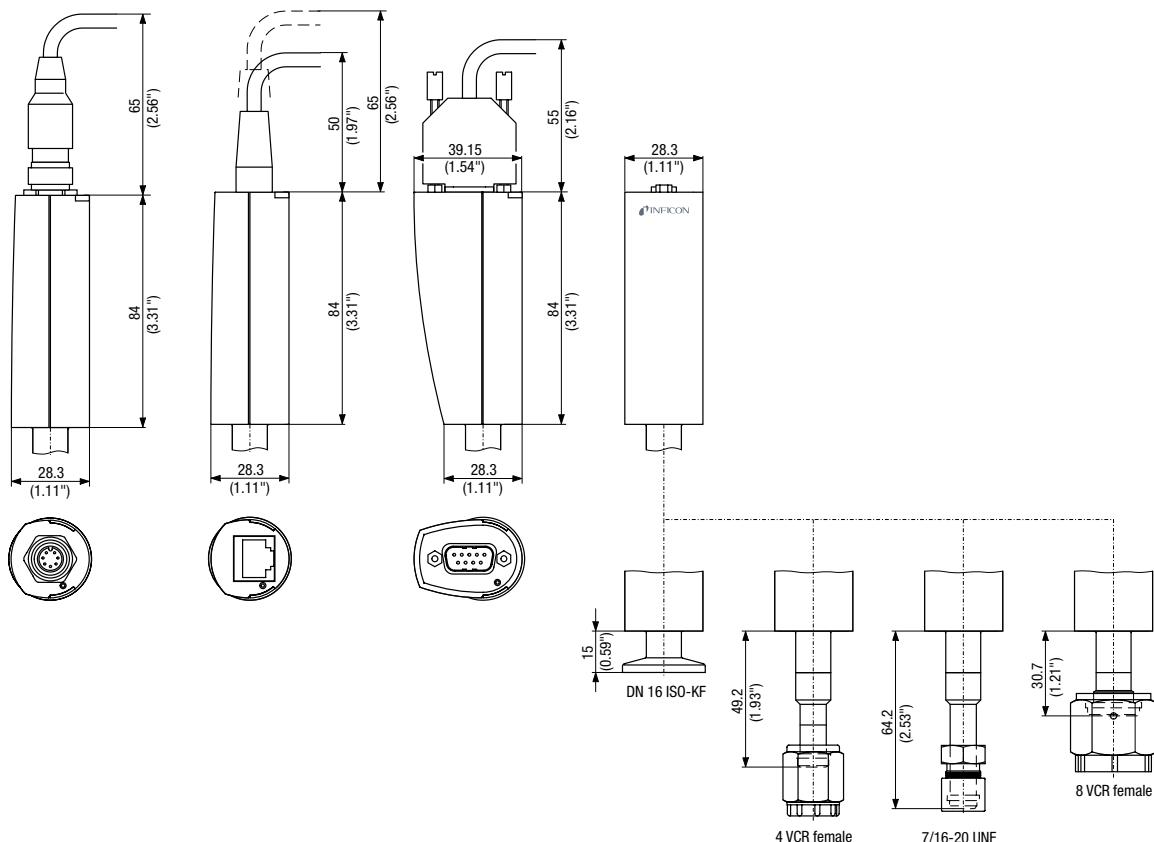

SKY® Capacitance Diaphragm Gauge

CDG025D, CDG025D-S

The INFICON SKY CDG025D Capacitance Diaphragm Gauge line of highly accurate temperature compensated manometers is designed for stable performance in harsh manufacturing tool environments. Advanced digital electronics improve gauge performance and offer easy handling features such as one pushbutton zero function and setpoint adjustment. The corrosion resistant ultra pure ceramic sensor provides excellent zero stability with a long life expectancy of several million pressure cycles, including atmospheric bursts. A unique sensor shielding (patent pending) protects the gauge from process contamination. A robust mechanical design and digital electronics improve EMC compatibility, long term stability and temperature compensation. The CDG025D sets new standards for fast stability after power on and fast recovery from atmospheric pressure exposure.



Advantages

- Full scale ranges from 100 mTorr ... 1000 Torr
- Fast stability after power on
- Fast recovery from atmospheric pressure
- Corrosion resistant ceramic sensor
- Excellent long term signal stability
- Temperature compensated
- Sensor protected from contamination
- One pushbutton zero function
- Wide range power supply
- 2 setpoints (optional)
- RS232 interface (optional)

Applications

- Semiconductor manufacturing equipment for Etch, CVD, PVD, ALD
- Data storage and display manufacturing equipment
- Industrial vacuum equipment
- General high accuracy pressure measurement

CDG025D, CDG025D-S (continued)

Ordering Information

CDG025D, temperature compensated

Full Scale Range			Flange type			
Torr	Pascal	mbar	1/2" tube	DN 16 ISO-KF	DN 16 CF-R	8 VCR®
1000	133,322	1333	375-000	375-001	375-002	375-003
100	13,332	133	376-000	376-001	376-002	376-003
10	1,333	13.3	377-000	377-001	377-002	377-003
1	133	1.3	378-000	378-001	378-002	378-003
0.1	13.3	0.13	379-000	379-001	379-002	379-003

CDG025D, with 2 setpoints and RS232 interface, temperature compensated

Full Scale Range			Flange type			
Torr	Pascal	mbar	1/2" tube	DN 16 ISO-KF	DN 16 CF-R	8 VCR®
1000	133,322	1333	375-300	375-301	375-302	375-303
–	110,000	1,100	375-500	375-501	375-502	375-503
200	26,664	267	382-300	382-301	382-302	382-303
100	13,332	133	376-300	376-301	376-302	376-303
–	10,000	100	376-500	376-501	376-502	376-503
20	2,666	26.7	383-300	383-301	383-302	383-303
10	1,333	13.3	377-300	377-301	377-302	377-303
–	1,000	10	377-500	377-501	377-502	377-503
1	133	1.3	378-300	378-301	378-302	378-303
–	100	1	378-500	378-501	378-502	378-503
0.25	33.3	0.33	385-300	385-301	385-302	385-303
0.1	13.3	0.13	379-300	379-301	379-302	379-303
–	10	0.1	379-500	379-501	379-502	379-503

bold = standard products

Other flange types and full scale ranges on request.

CDG025D, CDG025D-S (continued)

Specifications (Torr based standard products)

Measurement Range F.S. (Full Scale)	Torr Pa mbar	1000 133,322 133	100 13,332 133	10 1,333 13.3	1 133 1.3	0.1 13 0.13
Accuracy ¹⁾	% of reading	0.2	0.2	0.2	0.2	0.5
Temperature effect						
on zero	% F.S./°C	0.005	0.005	0.005	0.015	0.02
on span	% of reading/°C	0.01	0.01	0.01	0.01	0.03
Resolution	% F.S.	0.003	0.003	0.003	0.003	0.003
Pressure, max.	kPa (absolute)	400	260	260	260	130
Response time ²⁾	ms	30	30	30	30	130
Lowest reading	% F.S.			0.01		
Lowest suggested reading	% F.S.			0.05		
Lowest suggested control pressure	% F.S.			0.5		
Temperature						
Operation (ambient)	°C			+5 ... +50		
Bakeout at flange ³⁾	°C			≤110		
Storage	°C			-40 ... +65		
Supply voltage	VDC			14 ... 30		
Power consumption	W			≤1		
Output signal (analog)	VDC			0 ... +10		
Degree of protection				IP 30		
Standards				EN 61000-6-2, EN 61000-6-3, EN 61010, UL 61010-1, CSA 22.2 No.61010-1, RoHS		
Electrical connection				D-sub, 15 pole, male		
Setpoint ⁴⁾				two setpoints (SP1, SP2)		
Relay contact	VDC / ADC			30 / ≤0.5		
Hysteresis	% F.S.			1		
Materials exposed to vacuum				Aluminum oxide ceramic (Al_2O_3), Vacon 70 ⁵⁾ , stainless steel (AISI 316L ⁶⁾ , AgCuTi hard solder, sealing glass		

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.²⁾ Increase 10 ... 90% F.S.³⁾ Non operation⁴⁾ CDG025D-S only⁵⁾ 28% Ni, 23% Co, 49% Fe⁶⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe

CDG025D, CDG025D-S (continued)

Specifications (Torr based other ranges)

Measurement Range F.S. (Full Scale)	Torr Pa mbar	- 110,000 1000	200 26,664 267	- 10,000 100	20 2,666 26.7	- 1,000 10	- 100 1	0.25 33.3 0.33	- 10 0.1
Accuracy ¹⁾	% of reading	0.2	0.2	0.2	0.2	0.2	0.2	0.25	0.5
Temperature effect on zero	% F.S./°C	0.005	0.005	0.005	0.005	0.005	0.015	0.02	0.02
on span	% of reading/°C	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.03
Resolution	% F.S.	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003
Pressure, max.	kPa (absolute)	400	260	260	260	260	260	130	130
Response time ²⁾	ms	30	30	30	30	30	30	130	130


¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.

²⁾ Increase 10 ... 90% F.S.

For further specifications, see table above.

Dimensions, Internal Volume, Weight

mm (inch)

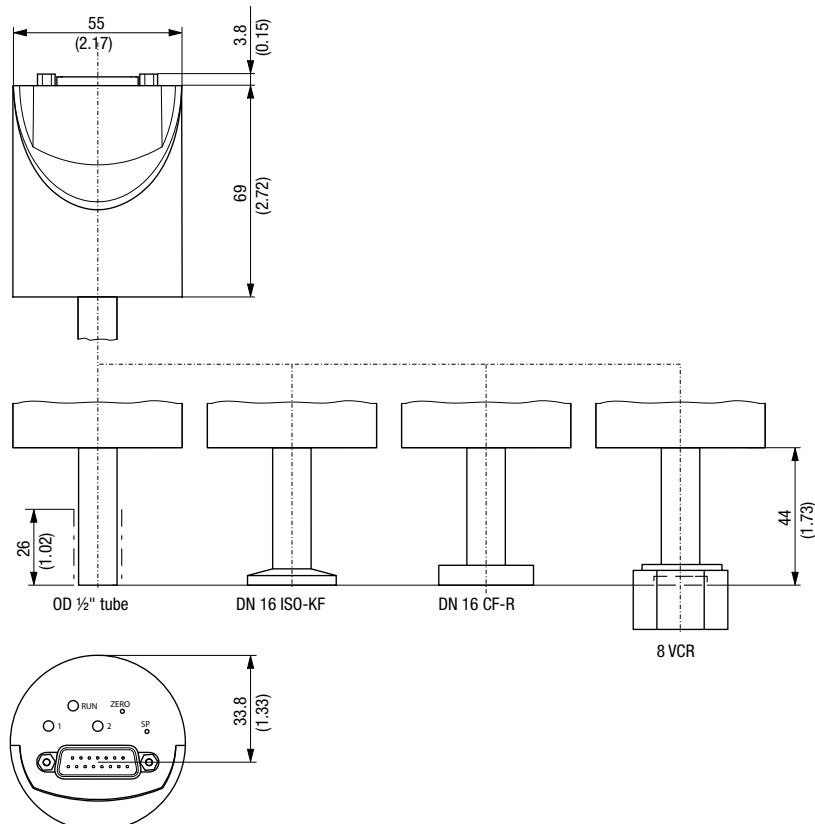

	1/2" tube	DN 16 ISO KF	DN 16 CF-R	8 VCR®
Internal volume	cm³ (inch³)	3.6 (0.22)	3.6 (0.22)	3.6 (0.22)
Weight	g	310	330	350

SKY® Capacitance Diaphragm Gauge

CDG025D-X3

The INFICON SKY CDG025D Capacitance Diaphragm Gauge line of highly accurate temperature compensated manometers is designed for stable performance in harsh manufacturing tool environments. Advanced digital electronics improve gauge performance and offer easy handling features such as one pushbutton zero function and setpoint adjustment. The corrosion resistant ultra pure ceramic sensor provides excellent zero stability with a long life expectancy of several million pressure cycles, including atmospheric bursts. A unique sensor shielding (patent pending) protects the gauge from process contamination. A robust mechanical design and digital electronics improve EMC compatibility, long term stability and temperature compensation. The CDG025D sets new standards for fast stability after power on and fast recovery from atmospheric pressure exposure.




Advantages

- Full scale ranges from 100 mTorr ... 1000 Torr
- Fast stability after power on
- Fast recovery from atmospheric pressure
- Corrosion resistant ceramic sensor
- Excellent long term signal stability
- Temperature compensated
- Sensor double protected from contamination
- One pushbutton zero function
- Wide range power supply
- 2 setpoints
- RS232 interface
- Clean room compliant

Applications

Accurate and fast pressure measurement for demanding applications:

- Semiconductor manufacturing equipment for Etch, CVD, PVD, ALD
- Data storage and display manufacturing equipment
- Industrial vacuum equipment
- General high accuracy pressure measurement

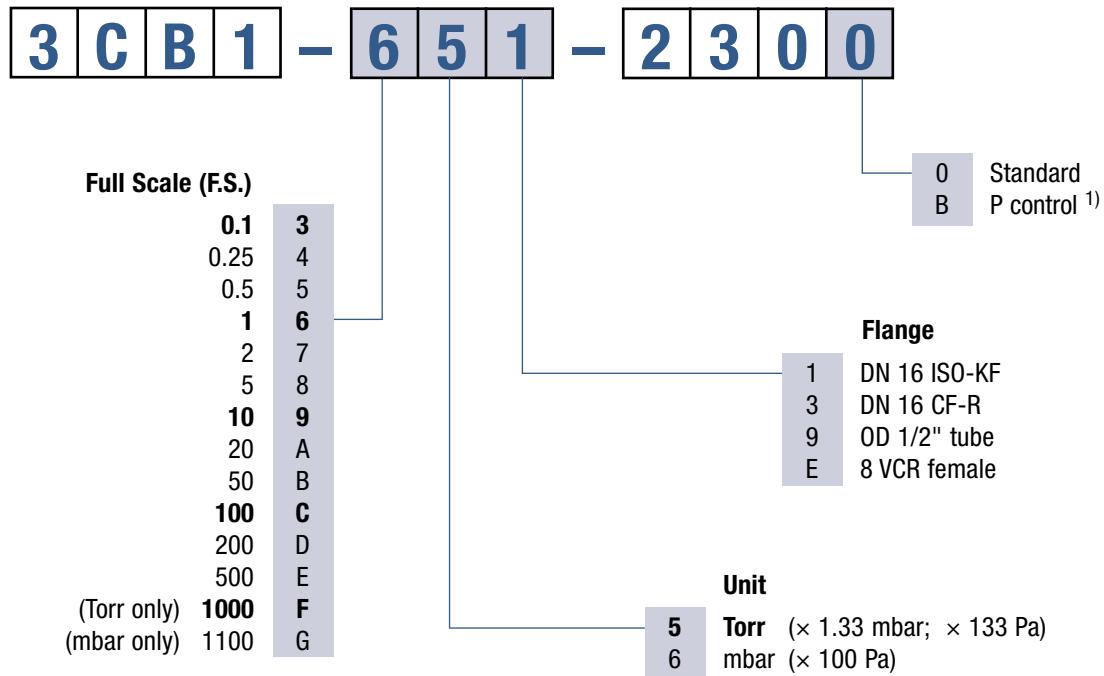CDG025D-X3 (continued)**Ordering Information**

¹⁾ Optimised signal filter setting for pressure control.

bold = standard products

Other flange types and full scale ranges (F.S.) on request.

CDG025D-X3 (continued)**Specifications (Torr based standard products)**

Measurement Range F.S. (Full Scale)	Torr Pa mbar	1000 133,322 1333	100 13,332 133	10 1,333 13.3	1 133 1.3	0.1 13 0.13
Accuracy ¹⁾	% of reading	0.2	0.2	0.2	0.2	0.5
Temperature effect						
on zero	% F.S./°C	0.005	0.005	0.005	0.015	0.02
on span	% of reading/°C	0.01	0.01	0.01	0.01	0.03
Resolution	% F.S.	0.003	0.003	0.003	0.003	0.003
Pressure, max.	kPa (absolute)	400	260	260	260	130
Response time ²⁾	ms	30	30	30	30	130 / 30 ³⁾
Lowest reading	% F.S.			0.01		
Lowest suggested reading	% F.S.			0.05		
Lowest suggested control pressure	% F.S.			0.5		
Temperature						
Operation (ambient)	°C			+5 ... +50		
Bakeout at flange ⁴⁾	°C			≤110		
Storage	°C			-40 ... +65		
Supply voltage	V DC			+14 ... +30		
Power consumption	W			≤1		
Output signal (analog)	V DC			0 ... +10		
Degree of protection				IP 30		
Standards		EN 61000-6-2, EN 61000-6-3, EN 61010, UL 61010-1, CSA 22.2 No.61010-1, RoHS				
Electrical connection		D-Sub, 15-pin, male				
Setpoint		two setpoints (SP1, SP2)				
Relay contact	V DC / A DC	30 / ≤0.5				
Hysteresis	% F.S.	1				
Materials exposed to vacuum		Aluminum oxide ceramic (Al ₂ O ₃), stainless steel (AISI 316L ⁵⁾)				

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.²⁾ Increase 10 ... 90% F.S.³⁾ For pressure control type only⁴⁾ Non operation⁵⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe

CDG025D-X3 (continued)**Specifications (Torr based other ranges)**


Measurement Range F.S. (Full Scale)	Torr Pa mbar	- 110,000 1100	200 26,664 267	- 10,000 100	20 2,666 26.7	- 1,000 10	- 100 1	0.25 33.3 0.33	- 10 0.1
Accuracy ¹⁾	% of reading	0.2	0.2	0.2	0.2	0.2	0.2	0.25	0.5
Temperature effect									
on zero	% F.S./°C	0.005	0.005	0.005	0.005	0.005	0.015	0.02	0.02
on span	% of reading/°C	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.03
Pressure, max.	kPa (absolute)	236	260	260	260	260	260	130	130
Resolution	% F.S.	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003
Response time ²⁾	ms	30	30	30	30	30	30	130	130 / 30 ³⁾

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.²⁾ Increase 10 ... 90% F.S.³⁾ For pressure control type only

Further specifications see table above.

Dimensions, Internal Volume, Weight

mm (inch)

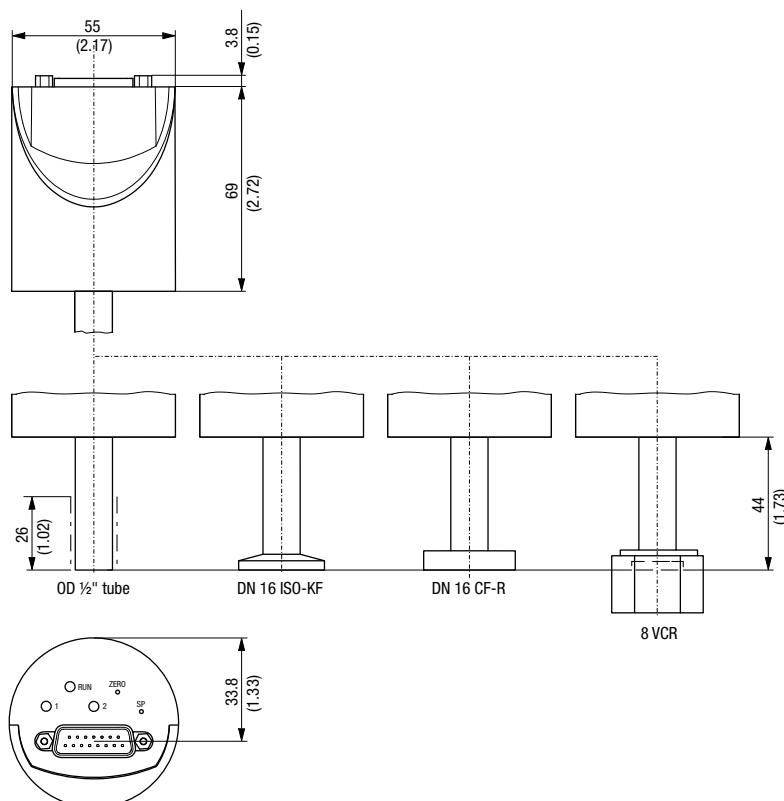

	1/2" tube	DN 16 ISO KF	DN 16 CF-R	8 VCR®
Internal volume	cm³ (inch³)	3.6 (0.22)	3.6 (0.22)	3.6 (0.22)
Weight	g	310	330	350

SKY® Capacitance Diaphragm Gauge

CDG045D

INFICON SKY CDG045D manometers are your best choice for highly accurate total pressure measurement and control. CDG045D gauges are temperature controlled at 45°C for superior signal stability and repeatability. They are available for full scale ranges from 100 mTorr to 1000 Torr, with all common flange types and fieldbus interfaces and provide a linear 0 to 10 V, gas type independent, pressure signal. INFICON capacitance manometers use a corrosion proof ultra pure alumina ceramic diaphragm. The advantages of the ceramic sensor are better signal stability, faster recovery from atmosphere, short warm up time and an extraordinary lifetime. INFICON CDG are high quality, cost effective pressure sensors for demanding vacuum applications.




Advantages

- Lower CoO (cost of ownership), 50% faster warm up, energy efficient low power consumption
- Easy integration, wide variety of full scales, flanges and interfaces, standard with two set points
- Easy one push button or remote signal zero command, zero offset adjustable
- Diagnostic port for quick service and maintenance
- Two year warranty, longer lifetime with advanced heating concept and gauge protection
- No long term recalibration due to excellent signal stability and repeatability, even in harsh plasma applications
- Compliance & standards: CE, EN, UL, SEMI, RoHS

Applications

- Etch, CVD, PVD and other semiconductor production processes
- Chemical and corrosive vacuum processes
- General thin film and vacuum processes
- Reference sensor for monitoring of test instruments according to international standards
- Transfer standard for traceability measurements

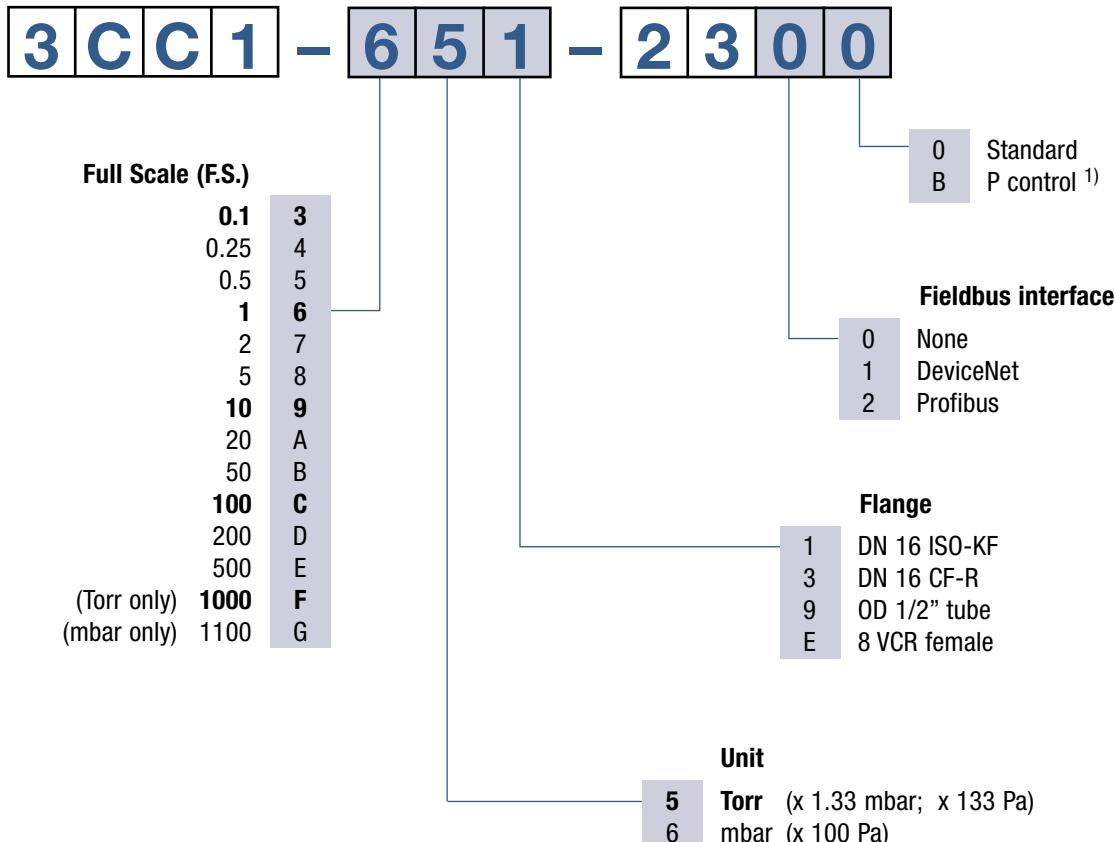CDG045D (continued)**Ordering Information**

¹⁾ Optimised signal filter setting for pressure control

bold = standard products

Other flange types and full scale ranges (F.S.) on request.

Accessories**Diagnostic**

Communication adapter (2 m) for PC RS232 serial port

303-333

Software to run the diagnostic functions on Windows NT, XP can be downloaded from our website.

CDG045D (continued)**Specifications (Torr based standard products)**

Measurement Range F.S. (Full Scale)	Torr Pa mbar	1000 133,322 1333	100 13,332 133	10 1,333 13.3	1 133 1.3	0.1 13 0.13
Accuracy ¹⁾	% of reading			0.15		
Temperature effect						
on zero	% F.S./°C		0.0025			0.005
on span	% of reading/°C			0.01		
Pressure, max.	kPa (absolute)	400		260		130
Resolution	% F.S.			0.003		
Lowest reading	% F.S.			0.01		
Lowest suggested reading	% F.S.			0.05		
Lowest suggested control pressure	% F.S.			0.5		
Temperature						
Operation (ambient)	°C		+10 ... +40			
Bakeout at flange	°C		≤110			
Storage	°C		−40 ... +65			
Supply voltage			+14 ... +30 VDC or ±15 V (±5%)			
Power consumption						
During Heat up	W		≤12			
At operating temperature	W		≤8			
Output signal (analog)	VDC		0 ... +10			
Response time ²⁾	ms		30			130 / 30 ³⁾
Degree of protection			IP 40			
Standards			EN 61000-6-3, EN 61010, UL 61010-1, CSA 22.2 No.61010-1, SEMI S-2			
Electrical connection			D-sub, 15 pole, male			
Setpoint			two setpoints (SP1, SP2)			
Relay contact	VDC / ADC		≤30 / ≤0.5			
Hysteresis	% F.S.		1			
Diagnostic port			RS232-C			
Protocol			pressure, status, ID,			
Read			set points, filter, zero adjust, factory reset, DC offset			
Set						
Materials exposed to vacuum			Aluminum oxide ceramic (Al_2O_3), stainless steel (AISI 316L) ⁴⁾			

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation²⁾ Increase 10 ... 90% F.S.³⁾ For pressure control type only⁴⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe

CDG045D (continued)**Specifications (Torr based other ranges)**

Measurement Range F.S. (Full Scale)	Torr	500	200	50	20	5	2	0.5	0.25
	Pa	66,661	26,664	6,666.1	2,666	666.61	266.66	66.66	33.3
	mbar	666.61	267	66.67	26.7	6.6661	2.67	0.67	0.33
Accuracy ¹⁾	% of reading					0.15			
Temperature effect									
on zero	% F.S./°C				0.0025				0.005
on span	% of reading/°C					0.01			
Pressure, max.	kPa (absolute)	400			260				130
Response time ²⁾	ms				30				130

1) Non-linearity, hysteresis, repeatability at 25 °C ambient operating temperature without temperature effects after 2 hours operation.

2) Increase 10 ... 90% F.S.

Further specifications see table above.

Specifications (mbar based products)

Measurement Range F.S. (Full Scale)	mbar	1100	100	10	1	0.1
	Pa	110,000	10,000	1,000	100	10
Accuracy ¹⁾	% of reading			0.15		
Temperature effect						
on zero	% F.S./°C		0.0025			0.005
on span	% of reading/°C			0.01		
Pressure, max.	kPa (absolute)	400		260		130
Response time ²⁾	ms		30			130 / 30 ³⁾

1) Non-linearity, hysteresis, repeatability at 25 °C ambient operating temperature without temperature effects after 2 hours operation.

2) Increase 10 ... 90% F.S. 3) For pressure control type only

Further specifications see tables «SPECIFICATIONS (Torr based standard products)» and «SPECIFICATIONS (Torr based other products)».

Specifications (DeviceNet™)**CDG045D DeviceNet™**


Protocol	DeviceNet™, group 2 slave only				
Data rate	kBaud	125, 250, 500 by switch or network programmable			
Cable length					
125 kbps	m (ft)	500 (1650)			
250 kbps	m (ft)	250 (825)			
500 kbps	m (ft)	100 (330)			
MAC ID	address 00 - 63 by switch or network programmable				
Digital functions	read set	pressure, status, ID set points, filter, zero adjust, factory reset, DC offset			
Specification	DeviceNet™ "Vacuum Gauge Device Profile" (ODVA)				
Device type	"VG" vacuum gauge				
I / O slave messaging	polling only				
Supply voltage for gauge at D-sub connector	+14 ... +30 VDC or ±15 V / ≤12 W				
Supply voltage for DeviceNet transceiver at microstyle connector	24 V nom / <2 W (11 ... 25 V)				
Connector for DeviceNet™	microstyle, 5 pin, male				
Connector for CDG (analog output, supply voltage CDG, setpoints)	D-sub, 15 pin, male				

CDG045D (continued)**Specifications (Profibus DP)****CDG045D Profibus DP**

Baud rates	kBaud MBaud	9.6 / 19.2 / 93.75 / 187.5 / 500 1.5 / 12
Address		address 00 - 125 by switch or network programmable
Digital functions	read set	pressure, status, ID set points, filter, zero adjust, factory reset, DC offset
Connector for Profibus DP		D-sub, 9 pin, female
Connector for CDG (analog output, supply voltage, setpoints)		D-sub, 15 pin, male

Dimensions

mm (inch)

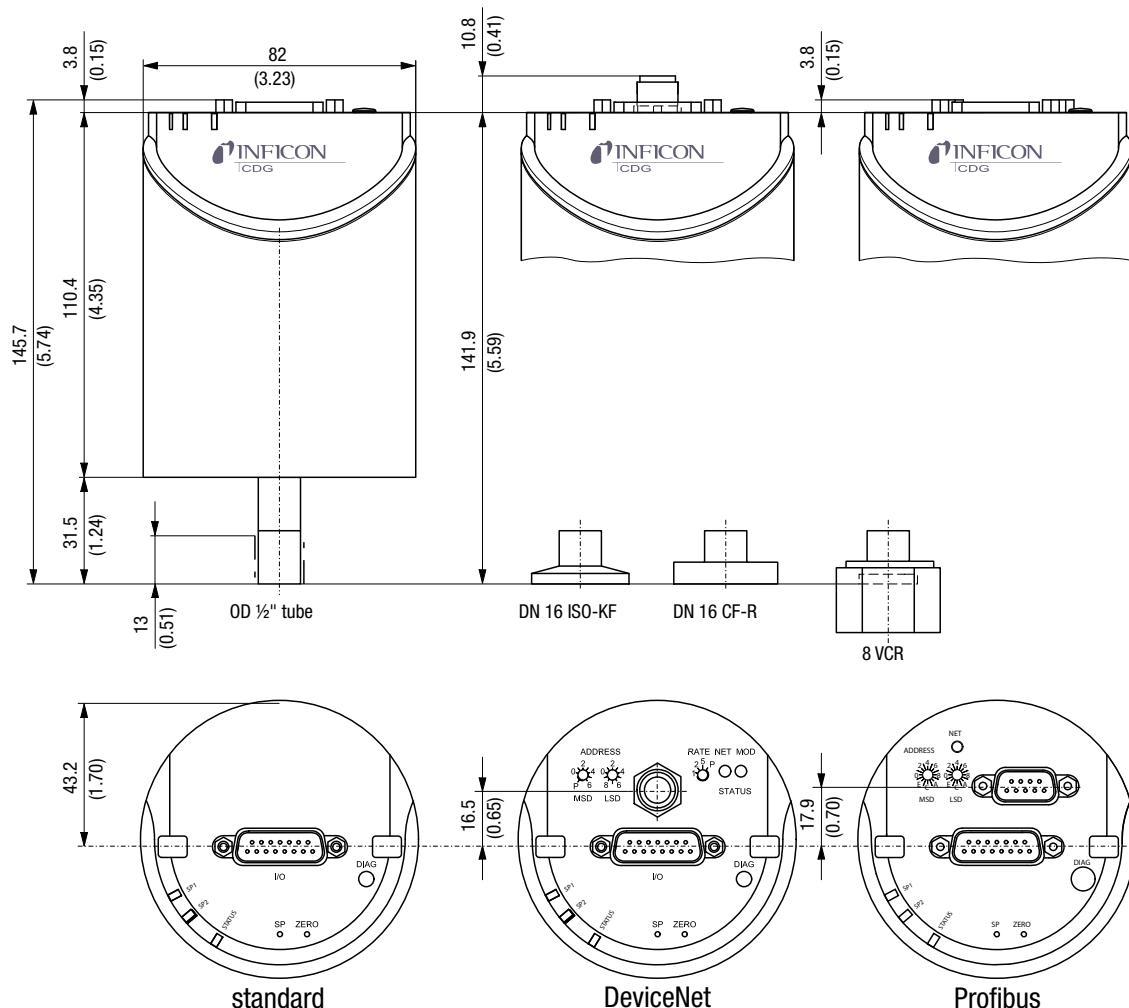

	1/2" tube	DN 16 ISO KF	DN 16 CF-R	8 VCR®
Internal volume	cm³ (inch³)	4.2 (0.26)	4.2 (0.26)	4.2 (0.26)
Weight	g	837	852	897

SKY® Capacitance Diaphragm Gauges

CDG100D

INFICON SKY CDG100D manometers are your best choice for accurate total pressure measurement and control. CDG100D gauges are temperature controlled at 100°C for superior performance in demanding semiconductor and plasma processes. They are available for full scale ranges from 100 mTorr to 1000 Torr, with all common flange types and fieldbus interfaces and provide a linear 0 to 10 V, gas type independent, pressure signal. INFICON capacitance manometers use an ultra pure alumina ceramic diaphragm which is corrosion proof. The advantages of the ceramic sensor are better signal stability, faster recovery from atmosphere, short warm up time and an extraordinary lifetime. INFICON CDG are high quality, cost effective pressure sensors for demanding semiconductor, plasma and vacuum applications.




Advantages

- Lower CoO (cost of ownership), 50% faster warm up, energy efficient low power consumption
- Easy integration, wide variety of full scales, flanges and interfaces, standard with two set points
- Easy one push button or remote signal zero command, zero offset adjustable
- Diagnostic port for quick service and maintenance
- Two year warranty, longer lifetime with advanced heating concept and gauge protection
- No long term recalibration due to excellent signal stability and repeatability, even in harsh plasma applications
- Compliance & standards: CE, EN, UL, SEMI, RoHS

Applications

- Etch, PVD, CVD and other semiconductor production processes
- Chemical and corrosive high temperature processes
- General thin film and vacuum processes requiring gauge protection

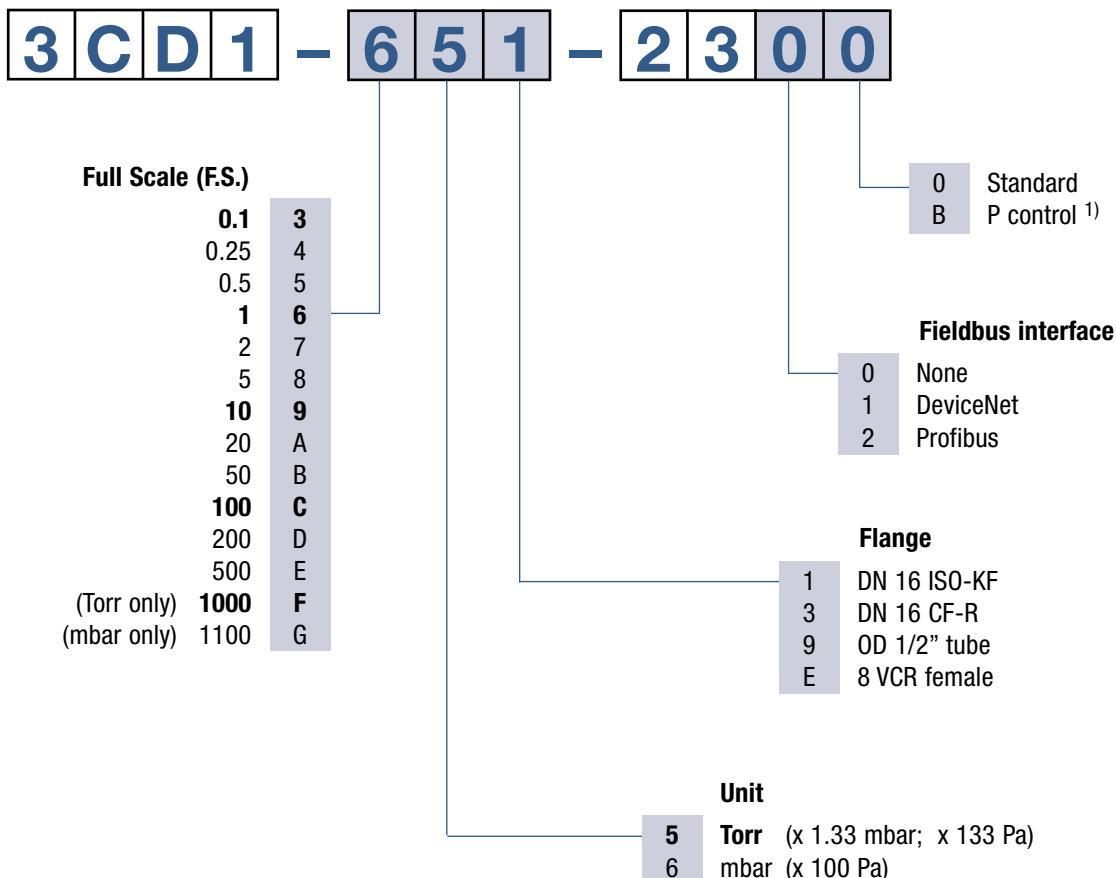CDG100D (continued)**Ordering Information**

¹⁾ Optimised signal filter setting for pressure control

bold = standard products

Other flange types and full scale ranges (F.S.) on request.

Accessories**Diagnostic**

Communication adapter (2 m) for PC RS232 serial port

303-333

Software to run the diagnostic functions on Windows NT, XP can be downloaded from our website.

CDG100D (continued)**Specifications (Torr based standard products)**

Measurement Range F.S. (Full Scale)	Torr Pa mbar	1000 133,322 1333	100 13,332 133	10 1,333 13.3	1 133 1.3	0.1 13 0.13
Accuracy ¹⁾	% of reading		0.2			0.4
Temperature effect						
on zero	% F.S./°C		0.0025			0.005
on span	% of reading/°C			0.02		
Pressure, max.	kPa (absolute)	400		260		130
Resolution	% F.S.		0.003			
Lowest reading	% F.S.		0.01			
Lowest suggested reading	% F.S.		0.05			
Lowest suggested control pressure	% F.S.		0.5			
Temperature						
Operation (ambient)	°C		+10 ... +50			
Bakeout at flange	°C		≤110			
Storage	°C		-40 ... +65			
Supply voltage			+14 ... +30 VDC or ±15 V (±5%)			
Power consumption						
During Heat up	W		≤15			
At operating temperature	W		≤10			
Output signal (analog)	VDC		0 ... +10			
Response time ²⁾	ms		30		130 / 30 ³⁾	
Degree of protection			IP 40			
Standards		EN 61000-6-3, EN 61010, UL 61010-1, CSA 22.2 No.61010-1, SEMI S-2				
Electrical connection			D-sub, 15 pole, male			
Setpoint			two setpoints (SP1, SP2)			
Relay contact	VDC / ADC		≤30 / ≤0.5			
Hysteresis	% F.S.		1			
Diagnostic port			RS232-C			
Protocol			pressure, status, ID,			
Read			set points, filter, zero adjust, factory reset, DC offset			
Set						
Materials exposed to vacuum		Aluminum oxide ceramic (Al ₂ O ₃), stainless steel (AISI 316L ⁴⁾)				

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.²⁾ Increase 10 ...³⁾ For pressure control type only⁴⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe

CDG100D (continued)**Specifications (Torr based other ranges)**

Measurement Range F.S. (Full Scale)	Torr	500	200	50	20	5	2	0.5	0.25
	Pa	66,661	26,664	6,666.1	2,666	666.61	266.66	66.66	33.3
	mbar	666.61	267	66.67	26.7	6.6661	2.67	0.67	0.33
Accuracy ¹⁾	% of reading	0.2						0.4	
Temperature effect on zero	% F.S./°C	0.0025						0.005	
on span	% of reading/°C	0.02							
Pressure, max.	kPa (absolute)	400	260						130
Response time ²⁾	ms	30						130	

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.²⁾ Increase 10 ... 90% F.S.

Further specifications see table above.

Specifications (mbar based products)

Measurement Range F.S. (Full Scale)	mbar	1100	100	10	1	0.1		
	Pa	110,000	10,000	1,000	100	10		
Accuracy ¹⁾	% of reading	0.2						
Temperature effect on zero	% F.S./°C	0.0025						
on span	% of reading/°C	0.02						
Pressure, max.	kPa (absolute)	400	260					
Response time ²⁾	ms	30						

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.²⁾ Increase 10 ... 90% F.S. ³⁾ For pressure control type only

Further specifications see table «SPECIFICATIONS (Torr based standard products)».

CDG100D (continued)**Specifications (DeviceNet™)**


CDG100D DeviceNet™		
Protocol	DeviceNet™, group 2 slave only	
Data rate	kBaud	125, 250, 500 by switch or network programmable
Cable length		
125 kbps	m (ft)	500 (1650)
250 kbps	m (ft)	250 (825)
500 kbps	m (ft)	100 (330)
MAC ID	address 00 - 63 by switch or network programmable	
Digital functions	read set	pressure, status, ID set points, filter, zero adjust, factory reset, DC offset
Specification	DeviceNet™ "Vacuum Gauge Device Profile" (ODVA)	
Device type	“VG” vacuum gauge	
I / O slave messaging	polling only	
Supply voltage for gauge at D-sub connector	+14 ... +30 VDC or ±15 V / ≤12 W	
Supply voltage for DeviceNet transceiver at microstyle connector	24 V nom / <2 W (11 ... 25 V)	
Connector for DeviceNet™	microstyle, 5 pin, male	
Connector for CDG (analog output, supply voltage CDG, setpoints)	D-sub, 15 pin, male	

Specifications (Profibus DP)

CDG100D Profibus DP		
Baud rates	kBaud MBaud	9.6 / 19.2 / 93.75 / 187.5 / 500 1.5 / 12
Address	address 00 - 125 by switch or network programmable	
Digital functions	read set	pressure, status, ID set points, filter, zero adjust, factory reset, DC offset
Connector for Profibus DP	D-sub, 9 pin, female	
Connector for CDG (analog output, supply voltage, setpoints)	D-sub, 15 pin, male	

CDG100D (continued)**Dimensions**

mm (inch)

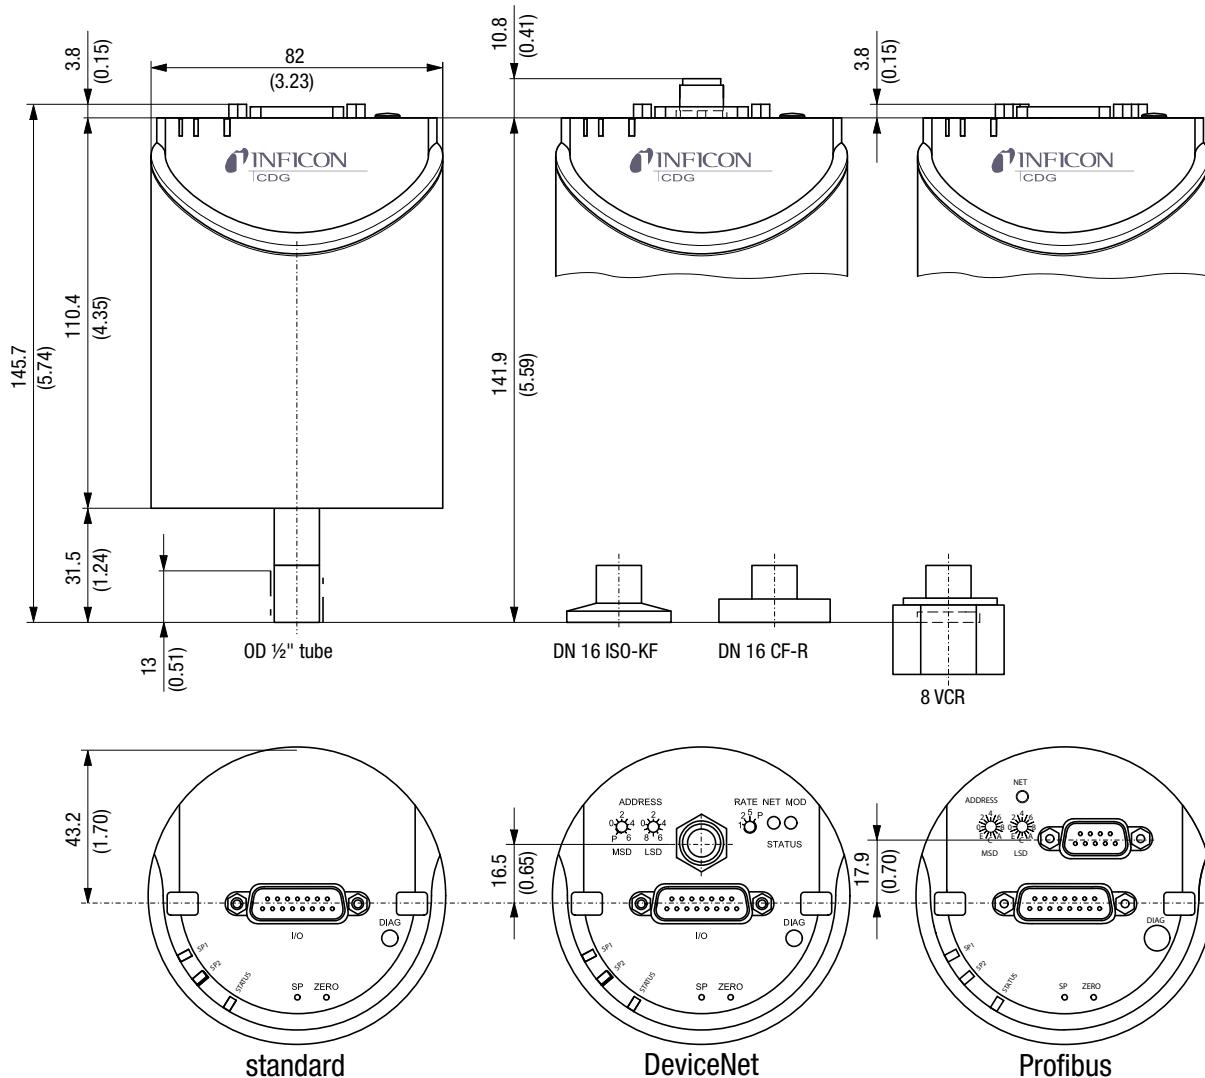

	1/2" tube	DN 16 ISO KF	DN 16 CF-R	8 VCR®
Internal volume	cm ³ (inch ³)	4.2 (0.26)	4.2 (0.26)	4.2 (0.26)
Weight	g	837	852	897

SKY® Capacitance Diaphragm Gauges

CDG160D, CDG200D

INFICON SKY CDG160D and CDG200D high temperature manometers are your best choice for accurate total pressure measurement and control. CDG160D and CDG200D gauges are temperature controlled at 160°C respectively 200°C for superior performance in demanding semiconductor and plasma processes. They are available for full scale ranges from 1 Torr to 1000 Torr, with all common flange types and fieldbus interfaces and provide a linear 0 to 10V, gas type independent, pressure signal. INFICON capacitance manometers use an ultra pure alumina ceramic diaphragm which is corrosion proof. The advantages of the ceramic sensor are better signal stability, faster recovery from atmosphere, short warm up time and an extraordinary lifetime. INFICON CDG are high quality, cost effective pressure sensors for demanding semiconductor, plasma and vacuum applications.




New!
200°C sensor

Advantages

- Lower CoO (cost of ownership), 50% faster warm up, energy efficient low power consumption
- Easy integration, wide variety of full scales, flanges and interfaces, standard with two set points
- Easy one push button or remote signal zero command, zero offset adjustable
- Diagnostic port for quick service and maintenance
- Two year warranty, longer lifetime with  heating concept and gauge protection
- No long term recalibration due to excellent signal stability and repeatability, even in harsh plasma applications
- Compliance & standards: CE, EN, UL, SEMI, RoHS

Applications

- Etch, PVD, CVD, LPCVD and other semiconductor production processes
- Chemical and corrosive high temperature processes
- General thin film and vacuum processes requiring gauge protection

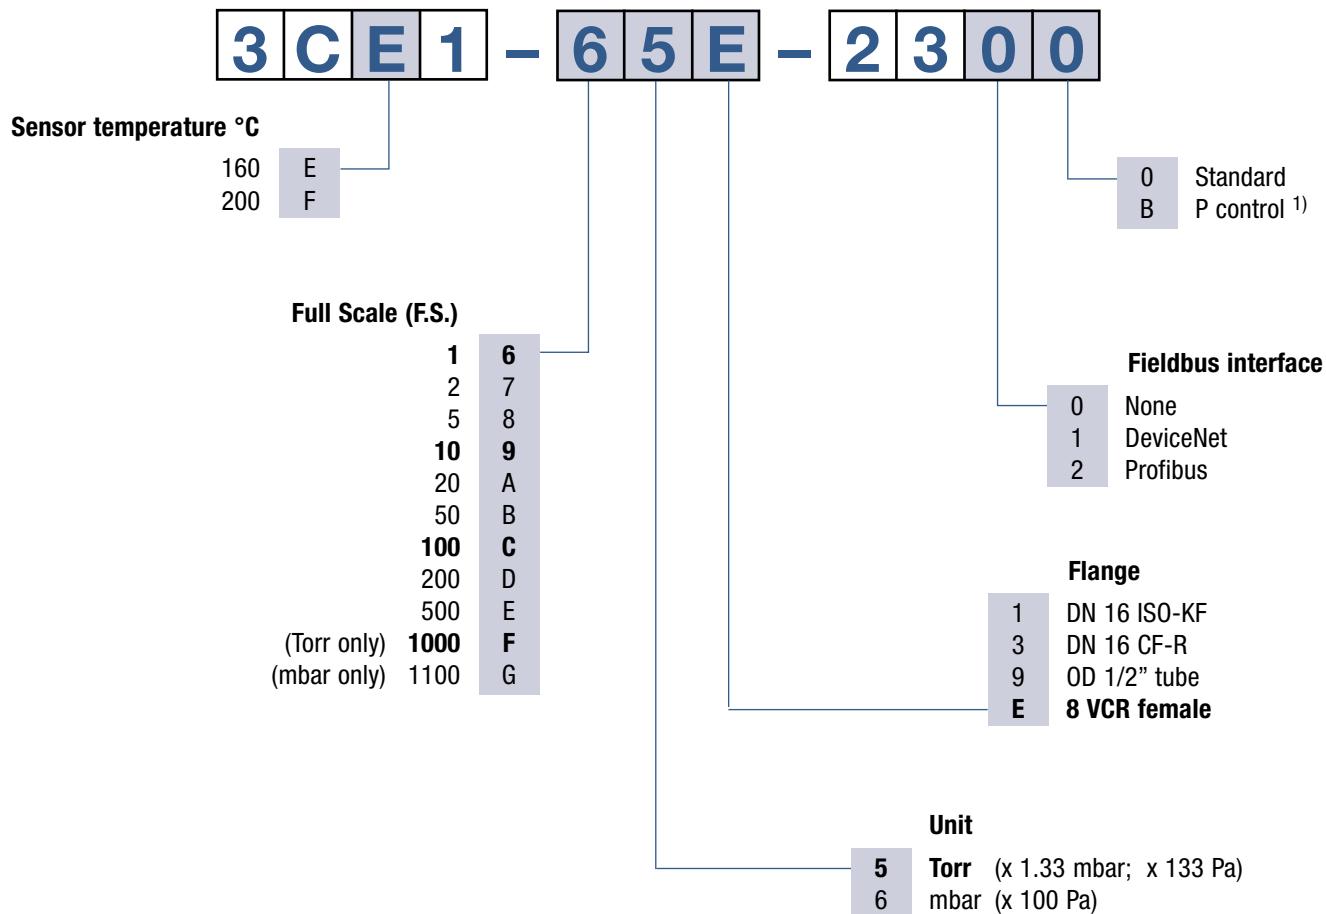CDG160D, CDG200D (continued)**Ordering Information**

¹⁾ Optimised signal filter setting for pressure control

bold = standard products

Other flange types and full scale ranges (F.S.) on request.

Accessories

Communication adapter (2 m) for PC RS232 serial port

Diagnostic

303-333

Software to run the diagnostic functions on Windows NT, XP can be downloaded from our website.

CDG160D, CDG200D (continued)**Specifications (Torr based standard products)**

Measurement Range F.S. (Full Scale)	Torr Pa mbar	1000 133,322 1333	100 13,332 133	10 1,333 13.3	1 133 1.3
Accuracy ¹⁾	% of reading			0.4	
Temperature effect					
on zero	% F.S./°C			0.005	
on span	% of reading/°C			0.02	
Pressure, max.	kPa (absolute)	400		260	
Resolution	% F.S.			0.003	
Lowest reading	% F.S.			0.01	
Lowest suggested reading	% F.S.			0.05	
Lowest suggested control pressure	% F.S.			0.5	
Temperature					
Operation (ambient)	°C		+10 ... +50		
Bakeout at flange	°C		≤200		
Storage	°C		-40 ... +65		
Supply voltage			+21 ... +30 V DC or ±15 V (±5%)		
Power consumption during heat up					
CDG160D	W		≤18		
CDG200D	W		≤25		
Power consumption at operating temperature					
CDG160D	W		≤12		
CDG200D	W		≤18		
Output signal (analog)	V DC		0 ... +10		
Response time ²⁾	ms		30		
Degree of protection			IP 40		
Standards		EN 61000-6-3, EN 61010, UL 61010-1, CSA 22.2 No.61010-1, SEMI S-2			
Electrical connection			D-Sub, 15-pin, male		
Setpoint			two setpoints (SP1, SP2)		
Relay contact	V DC / A DC		≤30 / ≤0.5		
Hysteresis	% F.S.		1		
Diagnostic port			RS232-C		
Protocol			pressure, status, ID,		
Read			set points, filter, zero adjust, factory reset, DC offset		
Set					
Materials exposed to vacuum		Aluminum oxide ceramic (Al_2O_3), stainless steel (AISI 316L ³⁾)			

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.²⁾ Increase 10 ... 90% F.S.³⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe

CDG160D, CDG200D (continued)**Specifications (Torr based other ranges)**

Measurement Range F.S. (Full Scale)	Torr Pa mbar	500 66,661 666.61	200 26,664 267	50 6,666.1 66.67	20 2,666 26.7	5 666.61 6.6661	2 266.66 2.67
Accuracy 1)	% of reading				0.4		
Temperature effect							
on zero	% F.S./°C				0.005		
on span	% of reading/°C				0.02		
Pressure, max.	kPa (absolute)	400				260	
Resolution	% F.S.				0.003		

1) Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.

Further specifications see table above.

Specifications (mbar based products)

Measurement Range F.S. (Full Scale)	mbar Pa	1100 110,000	100 10,000	10 1,000	1 100
Accuracy 1)	% of reading			0.4	
Temperature effect					
on zero	% F.S./°C			0.005	
on span	% of reading/°C			0.02	
Pressure, max.	kPa (absolute)	400			260
Resolution	% F.S.			0.003	

1) Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.

Further specifications see table «SPECIFICATIONS (Torr based standard products)».

Specifications (DeviceNet™)**CDG160D, CDG200D DeviceNet™**

Protocol	DeviceNet™, group 2 slave only				
Data rate	kBaud	125, 250, 500 by switch or network programmable			
Cable length					
125 kbps	m (ft)	500 (1650)			
250 kbps	m (ft)	250 (825)			
500 kbps	m (ft)	100 (330)			
MAC ID	address 00 - 63 by switch or network programmable				
Digital functions	read set	pressure, status, ID set points, filter, zero adjust, factory reset, DC offset			
Specification	DeviceNet™ "Vacuum Gauge Device Profile" (ODVA)				
Device type	"VG" vacuum gauge				
I / O slave messaging	polling only				
Supply voltage for gauge at D-sub connector	+14 ... +30 V DC or ±15 V / ≤12 W				
Supply voltage for DeviceNet transceiver at microstyle connector	24 V nom / <2 W (11 ... 25 V)				
Connector for DeviceNet™	microstyle, 5-pin, male				
Connector for CDG (analog output, supply voltage CDG, setpoints)	D-Sub, 15-pin, male				


CDG160D, CDG200D (continued)

Specifications (Profibus DP)

CDG160D, CDG200D Profibus DP		
Baud rates	kBaud	9.6 / 19.2 / 93.75 / 187.5 / 500
	MBaud	1.5 / 12
Address		address 00 - 125 by switch or network programmable
Digital functions	read set	pressure, status, ID set points, filter, zero adjust, factory reset, DC offset
Connector for Profibus DP		D-Sub, 9-pin, female
Connector for CDG (analog output, supply voltage, setpoints)		D-Sub, 15-pin, male

Dimensions, Internal Volume, Weight

mm (inch)

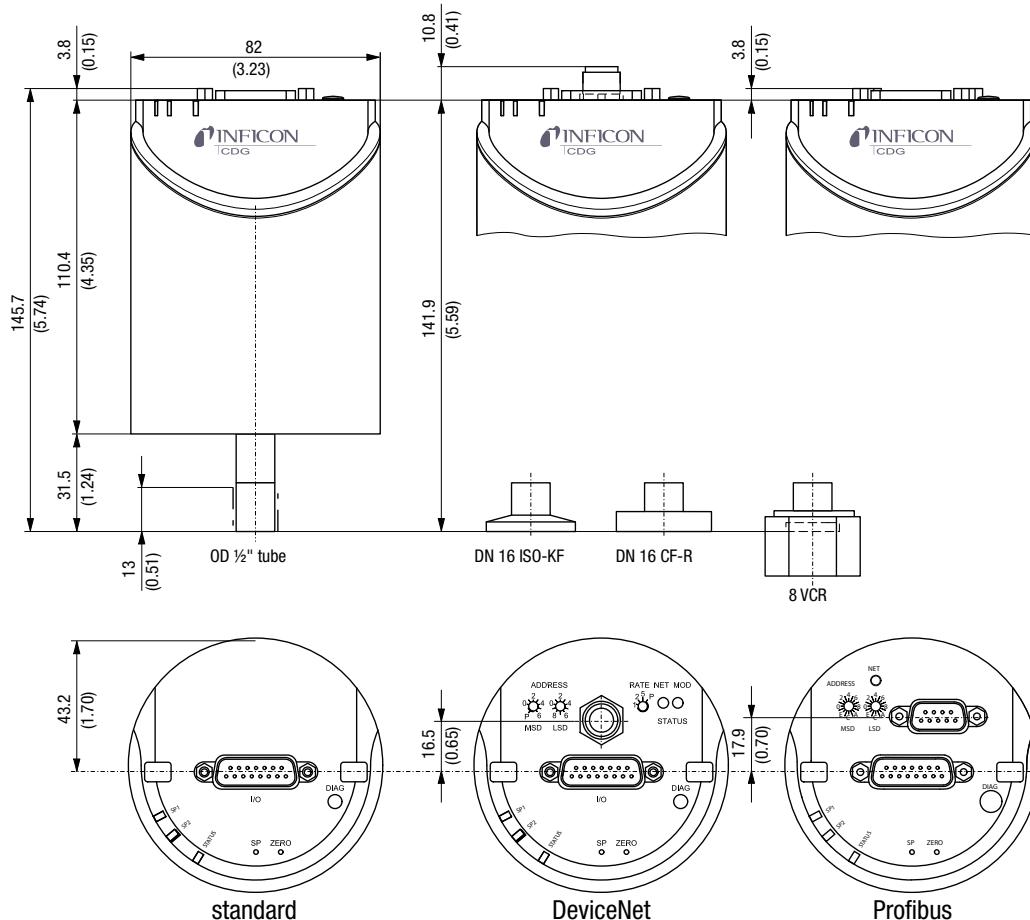

		1/2" tube	DN 16 ISO KF	DN 16 CF-R	8 VCR®
Internal volume	cm³ (inch³)	4.2 (0.26)	4.2 (0.26)	4.2 (0.26)	4.2 (0.26)
Weight	g	837	852	875	897

SKY® Capacitance Diaphragm Gauges

AllCeramic™ CDG025-C

All vacuum exposed surfaces of the Sky AllCeramic CDG are constructed of ultra-pure aluminum oxide ceramic, replacing the stainless steel tubing of our traditional CDG. This product is preferred in applications where metal contamination must be avoided.



Advantages

- No metal contamination
- Marginal zero drift
- Virtually corrosion proof – long sensor life results in reduced downtime thus reducing cost of ownership
- Superior accuracy and repeatability over long period of operation
- Better long term and temperature stability
- Less sensitive to frequent pressure cycles to atmosphere, may eliminate isolation valve (depending on operation mode)
- Less susceptible to particles and process by-products due to protection shield (Suprashield)

Applications

- Etch, CVD and PVD processes
- Doping silicon using implantation or diffusion processes
- Oxidation
- Creation of gate oxide layer in the range of 100 Å
- Creation of barrier layers (Ti, TiN, Ta and TaN as a protection layer between Silicon and Aluminum or Copper)

Ordering Information

Type	Flange	133322	13332.2	1333.22	133.322	ATM±13332.2 ²⁾
CDG025-C	1/2" tube	371-250	371-251	371-252	371-253	371-200

¹⁾ Other pressure units on request

²⁾ Pressure difference between atmospheric and gauge pressure

AllCeramic CDG025-C (continued)


Specifications

Measurement Range F.S. (full scale)	Pa	133322	13332.2	133.322	133.322	ATM±13332.2
Lowest suggested control pressure	Pa	6.66 x 10 ⁺²	6.66 x 10 ⁺¹	6.66 x 10 ⁺⁰	6.66 x 10 ⁻¹	–
Lowest suggested reading	Pa	6.66 x 10 ⁺¹	6.66 x 10 ⁺⁰	6.66 x 10 ⁻¹	6.66 x 10 ⁻²	–
Lowest reading	Pa	1.33 x 10 ⁺¹	1.33 x 10 ⁺⁰	1.33 x 10 ⁻¹	1.33 x 10 ⁻²	–
Accuracy ¹⁾	% of reading	0.2	0.2	0.2	0.2	0.2
Temperature effect						
on zero	% F.S./°C	0.005	0.005	0.005	0.015	0.05
on span	% of reading/°C	0.01	0.01	0.01	0.01	0.04
Resolution	% F.S.	0.0015	0.0015	0.0015	0.0025	0.01
Temperature						
Operation (ambient)	°C	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
At flange	°C	≤110	≤110	≤110	≤110	≤110
Storage	°C	−40 ... +65	−40 ... +65	−40 ... +65	−40 ... +65	−40 ... +65
Pressure max. (absolute)	kPa	400	267	267	267	267
Power supply						
Voltage 1 or	VDC	±15 ±5%	±15 ±5%	±15 ±5%	±15 ±5%	±15 ±5%
Voltage 2	VDC	+18 ... +26.4	+18 ... +26.4	+18 ... +26.4	+18 ... +26.4	+18 ... +26.4
Power consumption ²⁾	W	≤1.6	≤1.6	≤1.6	≤1.6	≤1.6
Output signal (analog)						
Measuring range	V	0 ... +10	0 ... +10	0 ... +10	0 ... +10	+5±5
Voltage range	V	−11 ... +11	−11 ... +11	−11 ... +11	−11 ... +11	−11 ... +11
Relation voltage vs. pressure		linear	linear	linear	linear	linear
Response time	ms	30	30	30	100	30
Internal volume	cm ³ (inch ³)	4.5 (0.275)	4.5 (0.275)	4.5 (0.275)	4.5 (0.275)	4.5 (0.275)
Weight	g	250	250	250	250	250
Protective type		IP 30	IP 30	IP 30	IP 30	IP 30
Electrical connection		D-sub, 15 pole, male	D-sub, 15 pole, male	D-sub, 15 pole, male	D-sub, 15 pole, male	D-sub, 15 pole, male
Materials exposed to vacuum		Aluminum oxide ceramic (Al ₂ O ₃), sealing glass				

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.

²⁾ Typical value at 25°C ambient temperature after reaching operating temperature.

Dimensions

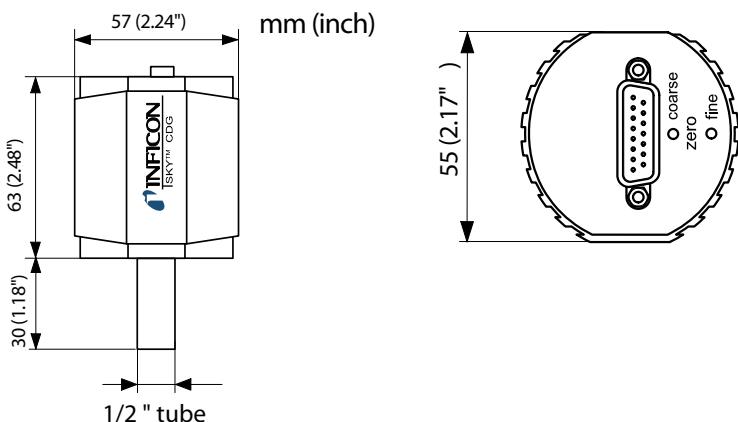

SKY® Capacitance Diaphragm Gauges

AllCeramic™ CDG160A-C / CDG160A-CS

The INFICON SKY AllCeramic CDG160A-C is the only completely metal-free 160°C temperature controlled capacitance diaphragm gauge designed for demanding applications, such as oxidation, diffusion and LPCVD. All surfaces exposed to the vacuum such as tubing, plasma shield and contamination protection shield are composed of corrosion-resistant ultra pure aluminum oxide ceramic, eliminating potential metal contamination from the gauge.

The INFICON SKY AllCeramic CDG160A-C integrates the proven sensor technology of the INFICON CDG160A series of gauges for reliable and repeatable performance in LPCVD and other harsh semiconductor manufacturing applications.



Advantages

- Metal-free ultra pure ceramic design prevents metal contaminations
- Temperature controlled to 160°C prevents condensation of process products and by-products
- Compact design saves valuable space and simplifies tool integration
- High ambient temperature compatibility
- Enhanced particle protection chamber with an additional protection shield (Suprashield) reduces the probability of gauge contamination
- Unique ceramic sensor design provides repeatability and accurate measurements with excellent long-term stability
- Optional set point and status indication provides additional control and safety functions

Applications

- Oxidation, diffusion and LPCVD processes
- Other metal-free vacuum measurement requirements

Ordering Information

Type	Set point	Flange	133322	13332.2	1333.22	133.322	Full scale (Pa ¹⁾
CDG160A-C	none	1/2" tube	371-260	371-261	371-262	371-263	
CDG160A-CS	2	1/2" tube	371-270	371-271	371-272	371-273	

¹⁾ Other pressure units on request

CDG160A-C / CDG160A-CS (continued)**Specifications**

Measurement Range F.S. (full scale)	Pa	133322	13332.2	1333.22	133.322
Lowest suggested control pressure	Pa	6.66 x 10 ⁺²	6.66 x 10 ⁺¹	6.66 x 10 ⁺⁰	6.66 x 10 ⁻¹
Lowest suggested reading	Pa	6.66 x 10 ⁺¹	6.66 x 10 ⁺⁰	6.66 x 10 ⁻¹	6.66 x 10 ⁻²
Lowest reading	Pa	1.33 x 10 ⁺¹	1.33 x 10 ⁺⁰	1.33 x 10 ⁻¹	1.33 x 10 ⁻²
Accuracy ¹⁾	% of reading	0.5	0.5	0.5	0.5
Temperature effect					
on zero	% F.S./°C	0.005	0.005	0.005	0.005
on span	% of reading/°C	0.02	0.02	0.02	0.02
Resolution	% F.S.	0.005	0.005	0.005	0.005
Temperature					
Operation (ambient)	°C	+15 ... +55	+15 ... +55	+15 ... +55	+15 ... +55
Bakeout (at flange)	°C	≤160	≤160	≤160	≤160
Storage	°C	-40 ... +65	-40 ... +65	-40 ... +65	-40 ... +65
Pressure max. (absolute)	kPa	400	267	267	267
Power supply	VDC	±15 ±5%	±15 ±5%	±15 ±5%	±15 ±5%
Power consumption					
at operating temperature	W	≤15	≤15	≤15	≤15
during warm up					
CDG160A-C	W	≤24	≤24	≤24	≤24
CDG160A-CS	W	≤27	≤27	≤27	≤27
Output signal (analog)					
Measuring range	V	0 ... +10	0 ... +10	0 ... +10	0 ... +10
Voltage range	V	-11 ... +11	-11 ... +11	-11 ... +11	-11 ... +11
Relation voltage vs. pressure		linear	linear	linear	linear
Response time	ms	50	50	50	50
Protective type		IP 30	IP 30	IP 30	IP 30
Electrical connection					
CDG160A-C		D-sub, 15 pole, male	D-sub, 15 pole, male	D-sub, 15 pole, male	D-sub, 15 pole, male
CDG160A-CS		D-sub, 25 pole, male	D-sub, 25 pole, male	D-sub, 25 pole, male	D-sub, 25 pole, male
Internal volume	cm ³ (inch ³)	4.7 (0.286)	4.7 (0.286)	4.7 (0.286)	4.7 (0.286)
Weight					
CDG160A-C	g	460	460	460	460
CDG160A-CS	g	490	490	490	490
Materials exposed to vacuum			Aluminum oxide ceramic (Al ₂ O ₃), sealing glass		


CDG160A-CS

Relay functions	two set points, five status indicators (two setpoints active, temperature sensor ok, temperature ready, overheat) and optical status indicator (power on)			
Relays type of contact	NO / NC change over	NO / NC change over	NO / NC change over	NO / NC change over
Switching voltage max.	VDC / VAC	110 / 125	110 / 125	110 / 125
Switching current	A	1	1	1

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.

CDG160A-C / CDG160A-CS (continued)

Dimensions

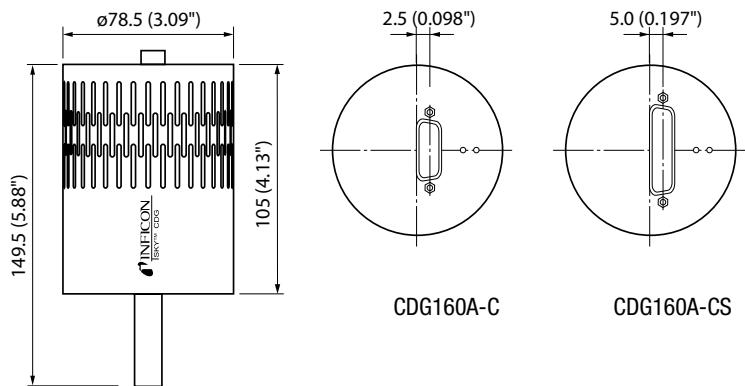

Ceramic tube 1/2"
CDG160A-C and CDG160A-CS

Bayard-Alpert Pirani Gauge

BPG400

The INFICON Bayard-Alpert Pirani Combination Gauge, BPG400, functions as two gauges in a single compact unit measuring from 5×10^{-10} mbar to atmosphere (3.8×10^{-10} Torr to atmosphere). Combining technologies reduces the complexity of installation, setup, and integration. Choose the BPG400 for affordable and repeatable process to base pressure measurements in one economic package.



ADVANTAGES

- Extremely wide measurement range from 5×10^{-10} mbar to atmosphere (3.8×10^{-10} Torr to atmosphere)
- Excellent repeatability in the process pressure range from $10^{-8} \dots 10^{-2}$ mbar of 5%
- The Pirani interlock protects the Bayard-Alpert system from premature filament burnout and excess contamination from high pressure operation
- Long-life yttrium oxide coated iridum filament
- Optional graphic display and Fieldbus interfaces available
- Automatic high vacuum Pirani adjustment reduces operator interventions
- RoHS compliance

APPLICATIONS

- Pressure measurement in semiconductor process and transfer chambers
- Industrial coating
- General vacuum measurement and control in the low to ultra high vacuum range

Ordering Information

Type	BPG400 without LCD	BPG400 with LCD	BPG400-SP with Profibus DP	BPG400-SD with DeviceNet™	BPG400-SR with RS485
DN 25 ISO-KF	353-500	353-501	353-505	353-507	353-509
DN 40 CF-R	353-502	353-503	353-506	353-508	353-513
Replacement sensor 25 ISO-KF	354-490	354-490	354-490	354-490	354-490
Replacement sensor 40 CF-R	354-491	354-491	354-491	354-491	354-491

ACCESSORIES

Power supply 24 V DC / RS232C line	353-511
Bakeout extension, 100 mm (3.94 inch)	353-510
Baffle	353-512
Centering ring with baffle DN 25 ISO-KF	211-113

BPG400 (continued)**Specifications**

		BPG400 Standard	BPG400 Display
Measurement range	(air, O ₂ , CO, N ₂)	mbar (Torr)	5x10 ⁻¹⁰ ... 1000 (3.8x10 ⁻¹⁰ ... 750)
Accuracy	10 ⁻⁸ ... 10 ⁻² mbar	% of reading	±15
Repeatability	10 ⁻⁸ ... 10 ⁻² mbar	% of reading	5
Degas ¹⁾	p < 7.2 x 10 ⁻⁶	mbar	electron bombardment, max. 3 min
Pressure, max.		bar (absolute)	2
Temperature			
Operation (ambient)	°C	0 ... +50	
Storage	°C	-20 ... +70	
Bakeout			
At flange with extension	°C	150	
At flange without extension	°C	80	
Electronics removed	°C	150	
Supply voltage	V / A DC	+20 ... +28 / 0.8	
Output signal analog	V	0 ... +10	
Measurement range	V	+0.774 ... +10	
Voltage vs. pressure	V / Decade	0.75	
Error signal	V	0.3 / 0.5	
Load impedance, min.	kΩ	10	
Interface (digital) ²⁾		RS232C	
Electrical connection		D-Sub, 15-pin, male	
Cable length, max. ³⁾	m (ft)	100 (330)	
Materials exposed to vacuum		Yt ₂ O ₃ , Ir, Pt, Mo, Cu, W, NiFe, NiCr, stainless steel, glass	
Internal volume KF / CF	cm ³ (inch ³)	24 (1.46) / 34 (2.1)	
Weight KF / CF	g	285 / 550	
Degree of protection		IP30	

1) Reduced accuracy during degas

2) Simultaneous use of RS232C or VGC400 series controllers and Fieldbus is not allowed

3) For RS232C operation <30 m

Specifications (Profibus DP)



	BPG400-SP Profibus DP	
Baud rates	kBaud	9.6 / 19.2 / 93.75 / 187.5 / 500
	MBaud	1.5 / 12
Address		2 switches (address 00 - 127) or network programmable
Digital functions		read pressure, select units: Torr, mbar, Pa degas function, Pirani full scale adjust monitor gauge status safe state allows definition of behavior in case of error detailed alarm and warning information
Analog functions		0 ... 10 V analog output pressure indication two setpoint relays A + B
Setpoint relays		2
Range	mbar	1x10 ⁻⁹ ... 100
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V / A DC	60 / 0.5
Connector for Profibus DP		D-Sub, 9-pin, female
Connector for BPG (analog output, supply voltage, setpoints)		D-Sub, 15-pin, male

BPG400 (continued)**Specifications (DeviceNet™)**

BPG400-SD DeviceNet™		
Protocol		DeviceNet™, group 2 slave only
Data rate switch	kBaud	125, 250, 500 or network programmable
Cable length		
125 kbps	m (ft)	500 (1650)
250 kbps	m (ft)	250 (825)
500 kbps	m (ft)	100 (330)
MAC ID		2 switches (address 00 - 63) or network programmable
Digital functions		read pressure, select units: Torr, mbar, Pa degas function, Pirani full scale adjust monitor gauge status safe state allows definition of behavior in case of error detailed alarm and warning information
Analog functions		0 ... 10 V analog output pressure indication two setpoint relays A + B
Specification		DeviceNet™ "Vacuum Gauge Device Profile"
Device type		"CG" for combination gauge
I / O slave messaging		polling only
Setpoint relays		2
Range	mbar	1x10 ⁻⁹ ... 100
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V / A DC	60 / 0.5
Supply voltage for DeviceNet™	V / A DC	+11 ... +25 / 0.5
Supply voltage for gauge	V / A DC	+20 ... +28 / 0.8
Connector for DeviceNet™		Microstyle, 5-pin
Connector for BPG (analog output, supply voltage, setpoints)		D-Sub, 15-pin, male

Specifications (RS485)

BPG400-SR RS485		
Baud rates	kBaud	0.3 / 1.2 / 2.4 / 4.8 / 9.6 / 19.2 / 28.8
Address		2 switches (address 00 - 127) or network programmable
Digital functions		read pressure, select units: Torr, mbar, Pa degas function, Pirani full scale adjust monitor gauge status detailed alarm and warning information
Analog functions		0 ... 10 V analog output pressure indication two setpoint relays A + B
Setpoint relays		2
Range	mbar	1x10 ⁻⁹ ... 100
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V / A DC	60 / 0.5
Connector for RS485		D-Sub, 9-pin, male
Connector for BPG (analog output, supply voltage, setpoints)		D-Sub, 15-pin, male

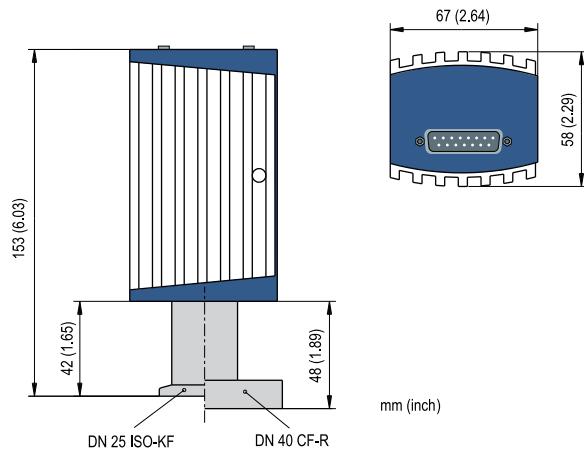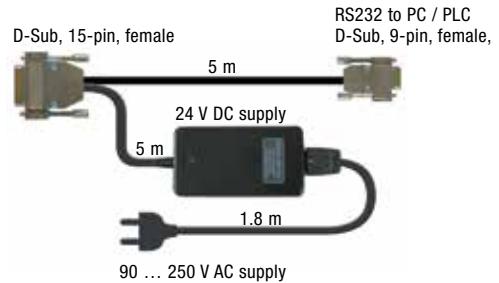BPG400 (continued)**Dimensions****Accessories****Power supply 24 V DC / RS232C line****Bakeout extension:**

Allows measurement at flange temperatures up to 150°C.
Easy installation into the vacuum connection - no tools required.

**Baffle:**

Prevents contamination of the sensor.
Fast and easy installation.



Bayard-Alpert Pirani Gauge

BPG402-S

The INFICON Bayard-Alpert Pirani Combination Gauge, BPG402-S, functions as two gauges in a single compact unit measuring from 5×10^{-10} mbar to atmosphere (3.8×10^{-10} Torr to atmosphere). Combining technologies reduces the complexity of installation, setup, and integration. Choose the BPG402-S with two yttrium oxide coated iridium filaments for affordable and repeatable process to base pressure measurements in one economical package. Sensing elements with on-board calibration data guarantees high reproducibility when exchanging sensors.

Advantages

- Extremely wide measurement range from 5×10^{-10} mbar to atmosphere (3.8×10^{-10} Torr to atmosphere)
- Excellent repeatability in the process pressure range from $10^{-8} \dots 10^{-2}$ mbar of 5%
- Pirani interlock protects the filament from premature burnout
- Two long-life yttrium oxide coated iridium filaments
- Optional graphic display and Fieldbus interfaces available
- Automatic high vacuum Pirani adjustment reduces operator interventions
- Easy to exchange sensing element with on-board calibration data guarantees high reproducibility
- RoHS compliance

Applications

- Pressure measurement in semiconductor process and transfer chambers
- Industrial coating
- General vacuum measurement and control in the low to ultra high vacuum range

Ordering Information

Type	BPG402-S	BPG402-S	BPG402-SL	BPG402-SP	BPG402-SD
	without display	with display	with long tube without display	with Profibus DP	with DeviceNet™
DN 25 ISO-KF	353-570	353-572	—	353-574	353-576
DN 40 CF-R	353-571	353-573	353-578	353-575	353-577
Replacement sensor 25 ISO-KF	354-494	354-494	—	354-494	354-494
Replacement sensor 40 CF-R	354-495	354-495	354-496	354-495	354-495



BPG402-S (continued)**Accessories**

Type	BPG402-S without display	BPG402-S with display	BPG402-SL with long tube without display	BPG402-SP with Profibus DP	BPG402-SD with DeviceNet™
Power supply 24 V DC / RS232C line			353-511		
Baffle			353-512		
Centering ring with baffle DN 25 ISO-KF			211-113		

Specifications

		BPG402-S / -SL Standard	BPG402-S Display
Measurement range	(air, O ₂ , CO, N ₂)	mbar (Torr)	5x10 ⁻¹⁰ ... 1000 (3.8x10 ⁻¹⁰ ... 750)
Accuracy	10 ⁻⁸ ... 10 ⁻² mbar	% of reading	±15
Repeatability	10 ⁻⁸ ... 10 ⁻² mbar	% of reading	5
Degas ¹⁾	p < 7.2 x 10 ⁻⁶	mbar	electron bombardment, max. 3 min
Pressure, max.		bar (absolute)	2
Temperature			
Operation (ambient)	°C	0 ... +50	
Storage	°C	-20 ... +70	
Bakeout at flange without electronics			
BPG402-S	°C	80	
BPG402-SL	°C	150	
Supply voltage	V / A DC	+20 ... +28 / ≤0.8	
Output signal analog	V	0 ... +10	
Measurement range	V	+0.774 ... +10	
Voltage vs. pressure	V / Decade	0.75	
Error signal	V	0.1 / 0.3 / 0.5	
Load impedance, min.	kΩ	10	
Set point relay		1	
Range	mbar	1x10 ⁻⁹ ... 100	
Relay contact		n.o., potential free	
Hysteresis	% of reading	10	
Contact rating	V / A DC	≤30 / ≤0.5	
Digital functions		degas	
Interface (digital) ²⁾		RS232C	
Emission control		automatic / manual via interface	
Filament		two Yt ₂ O ₃ coated Ir	
Filament status		LED / digital output	
Electrical connection		D-Sub, 15 pin, male	
Cable length, max. ³⁾	m (ft)	100 (330)	
Materials exposed to vacuum		Yt ₂ O ₃ , Ir, Pt, Mo, Cu, W, NiFe, NiCr, stainless steel, glass	
Internal volume KF / CF	cm ³ (inch ³)	24 (1.46) / 34 (2.1)	
Weight KF / CF	g	450 / 710	
Degree of protection		IP30	



¹⁾ Reduced accuracy during degas²⁾ Simultaneous use of RS232C or VGC400 series controllers and Fieldbus is not allowed³⁾ For RS232C operation <30 m

BPG402-S (continued)**Specifications**

BPG402-SP Profibus DP		
Baud rates	kBaud	9.6 / 19.2 / 93.75 / 187.5 / 500
	MBaud	1.5 / 12
Address		2 switches (address 00 - 127) or network programmable
Digital functions		read pressure, select units: Torr, mbar, Pa emission control, degas function monitor gauge status, filament status safe state allows definition of behavior in case of error detailed alarm and warning information
Analog functions		0 ... 10 V analog output pressure indication two setpoint relays A + B
Setpoint relays		2
Range	mbar	1×10^{-9} ... 100
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V / A DC	≤ 30 / ≤ 0.5
Connector for Profibus DP		D-Sub, 9 pin, female
Connector for BPG (analog output, supply voltage, setpoints)		D-Sub, 15 pin, male

Specifications

BPG402-SD DeviceNet™		
Protocol		DeviceNet™, group 2 slave only
Data rate switch	kBaud	125, 250, 500 or network programmable
Cable length		
125 kbps	m (ft)	500 (1650)
250 kbps	m (ft)	250 (825)
500 kbps	m (ft)	100 (330)
MAC ID		2 switches (address 00 - 63) or network programmable
Digital functions		read pressure, select units: Torr, mbar, Pa emission control, degas function monitor gauge status, filament status safe state allows definition of behavior in case of error detailed alarm and warning information
Analog functions		0 ... 10 V analog output pressure indication two setpoint relays A + B
Specification		DeviceNet™ "Vacuum Gauge Device Profile"
Device type		"CG" for combination gauge
I / O slave messaging		polling only
Setpoint relays		2
Range	mbar	1×10^{-9} ... 100
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V / A DC	≤ 30 / ≤ 0.5
Supply voltage for DeviceNet™	V / A DC	+11 ... +25 / ≤ 0.5
Supply voltage for gauge	V / A DC	+20 ... +28 / ≤ 0.8
Connector for DeviceNet™		Microstyle, 5 pin
Connector for BPG (analog output, supply voltage, setpoints)		D-Sub, 15 pin, male

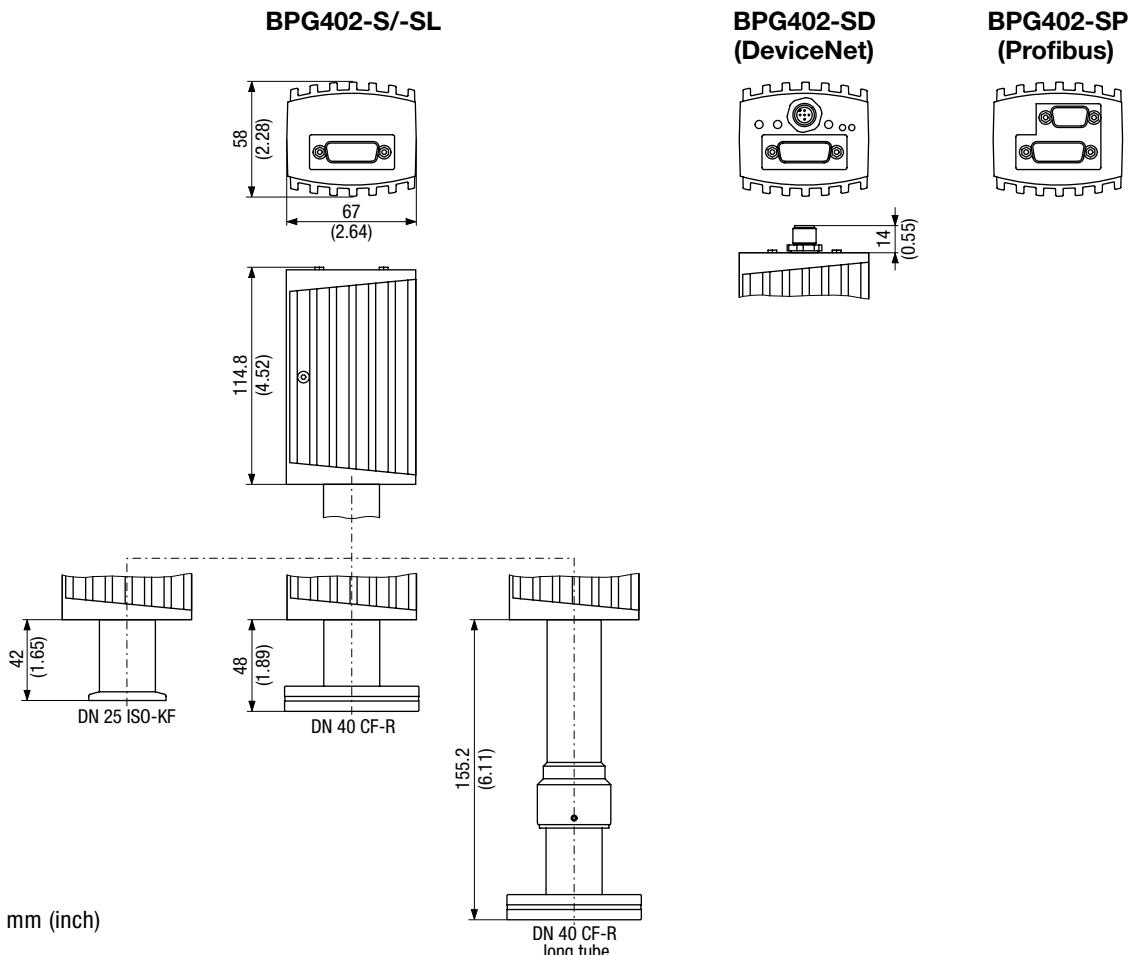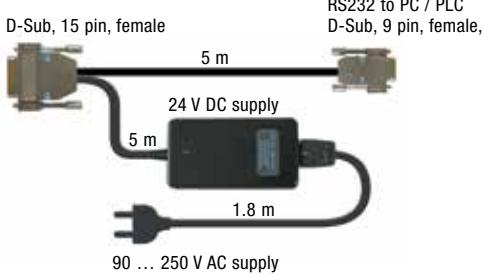BPG402-S (continued)**Dimensions****Accessories****Power supply 24 V DC / RS232C line****Baffle:**

Prevents contamination of the sensor.
Easy installation into the vacuum connection - no tools required.



High Pressure Hot Ionization Pirani Gauge

HPG400

The INFICON High Pressure Hot Ionization Pirani Gauge, HPG400, combines High Pressure Hot Ionization and Pirani sensors in a single, compact, economical package to measure pressure from 2×10^{-6} mbar to atmosphere (1.5×10^{-6} Torr to atmosphere). The HPG400 provides highly repeatable and reproducible pressure measurement for accurate sputter process pressure control.



Advantages

- HPG400 saves cost and tool space and reduces the complexity of vacuum system installation and setup
- The high pressure hot ion gauge delivers accurate, reliable pressure measurements from 1×10^{-5} ... 1 mbar for improved process control
- User selectable hot ion emission activation between 5×10^{-2} and 1 mbar
- Pirani interlock protects the hot filament from premature burnout
- Optional graphic display and Fieldbus interfaces available
- Automatic high vacuum Pirani adjustment reduces operator interventions
- RoHS compliance

Applications

- Sputter applications in semiconductor manufacturing, electronics and media industry
- Industrial coating
- General vacuum measurement and control in the low to high vacuum range

Ordering Information

Type	HPG400 without LCD	HPG400 with LCD	HPG400-SP with Profibus DP ¹⁾	HPG400-SD with DeviceNet ¹⁾
DN 25 ISO-KF	353-520	353-521	353-525	353-527
DN 40 CF-F	353-522	353-523	353-526	353-528
Replacement sensor 25 ISO-KF	354-487	354-487	354-487	354-487
Replacement sensor 40 CF-R	354-488	354-488	354-488	354-488

¹⁾ not available with LCD

Accessories

Power supply 24 V DC / RS232C line	353-511
Centering ring with baffle DN 25 ISO-KF	211-113

HPG400 (continued)**Specifications**

		HPG400 Standard	HPG400 Display
Measurement range (air, N ₂)	mbar (Torr)	2x10 ⁻⁶ ... 1000 (1.5x10 ⁻⁶ ... 750)	
Accuracy	10 ⁻⁵ ... 1 mbar	% of reading	±15 ¹⁾
Repeatability	10 ⁻⁵ ... 10 ⁻¹ mbar	% of reading	2
	10 ⁻¹ ... 100 mbar	% of reading	30
Hot ion emission on, selectable	mbar	1	
	mbar	5x10 ⁻¹	
	mbar	2x10 ⁻¹	
	mbar	1x10 ⁻¹	
	mbar	5x10 ⁻²	
Pressure, max.	bar (absolute)	2	
Temperature			
Operation (ambient)	°C	0 ... +50	
Storage	°C	-20 ... +70	
Bakeout			
At flange	°C	80	
Electronics removed	°C	150	
Supply voltage	V / A DC	20 ... 28 / 0.8	
Output signal analog	V	0 ... +10.2	
Measurement range			
Hot cathode	V	1.5 ... 7.5	
Pirani	V	8.5 ... 9.75	
Voltage vs. pressure			
Hot cathode	V / Decade	1	
Pirani	V / Decade	0.25	
Error signal			
Hot cathode	V	0.3	
Pirani	V	0.5	
Load impedance , min.	kΩ	10	
Interface (digital) ²⁾		RS232C	
Electrical connection		D-Sub, 15-pin, male	
Cable length, max. ³⁾	m (ft)	100 (330)	
Materials exposed to vacuum		Yt ₂ O ₃ , Ir, Pt, Mo, Cu, W, NiFe, NiCr, stainless steel, glass	
Internal volume KF / CF	cm ³ (inch ³)	20 (1.2) / 30 (1.8)	
Weight KF / CF	g	430 / 695	
Degree of protection		IP30	

¹⁾ Accuracy from 10⁻⁵ mbar to the selected hot ion emission on value²⁾ Simultaneous use of RS232C or VGC400 series controllers and Fieldbus is not allowed³⁾ For RS232C operation <30 m

HPG400 (continued)**Specifications (DeviceNet™)**


HPG400-SD DeviceNet™		
Protocol	DeviceNet™, group 2 slave only	
Data rate switch	kBaud 125, 250, 500 or network programmable	
Cable length		
125 kbps	m (ft)	500 (1650)
250 kbps	m (ft)	250 (825)
500 kbps	m (ft)	100 (330)
MAC ID	2 switches (address 00 - 63) or network programmable	
Network size	up to 64 nodes per segment	
Digital functions	read pressure, select units: Torr, mbar, Pa Pirani full scale adjust monitor gauge status safe state allows definition of behavior in case of error detailed alarm and warning information	
Analog functions	0 ... 10 V analog output pressure indication two setpoint relays A + B	
Visual communication indicators	LED network status (green / red) LED module status (green / red)	
Specification	DeviceNet™ "Vacuum Gauge Device Profile"	
Device type	"CG" for combination gauge	
I / O slave messaging	polling only	
Setpoint relays	2	
Range	mbar	2x10 ⁻⁶ ... 100
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V DC / A	60 / 0.5
Supply voltage for DeviceNet™	V DC / A	11 ... 25 / 0.5
Supply voltage for gauge	V DC / A	20 ... 28
Connector for DeviceNet™	Microstyle, 5-pin	
Connector for HPG (analog output, supply voltage, setpoints)	D-Sub, 15-pin, male	

Specifications (Profibus DP)

HPG400-SP Profibus DP		
Baud rates	kBaud MBaud	9.6 / 19.2 / 93.75 / 187.5 / 500 1.5 / 12
Address	2 switches (address 00 - 127) or network programmable	
Digital functions	read pressure, select units: Torr, mbar, Pa Pirani full scale adjust monitor gauge status safe state allows definition of behavior in case of error detailed alarm and warning information	
Analog functions	0 ... 10 V analog output pressure indication two setpoint relays A + B	
Setpoint relays	2	
Range	mbar	1x10 ⁻⁶ ... 100
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V DC / A	60 / 0.5
Connector for Profibus DP	D-Sub, 9-pin, female	
Connector for HPG (analog output, supply voltage, setpoints)	D-Sub, 15-pin, male	


HPG400 (continued)

Dimensions

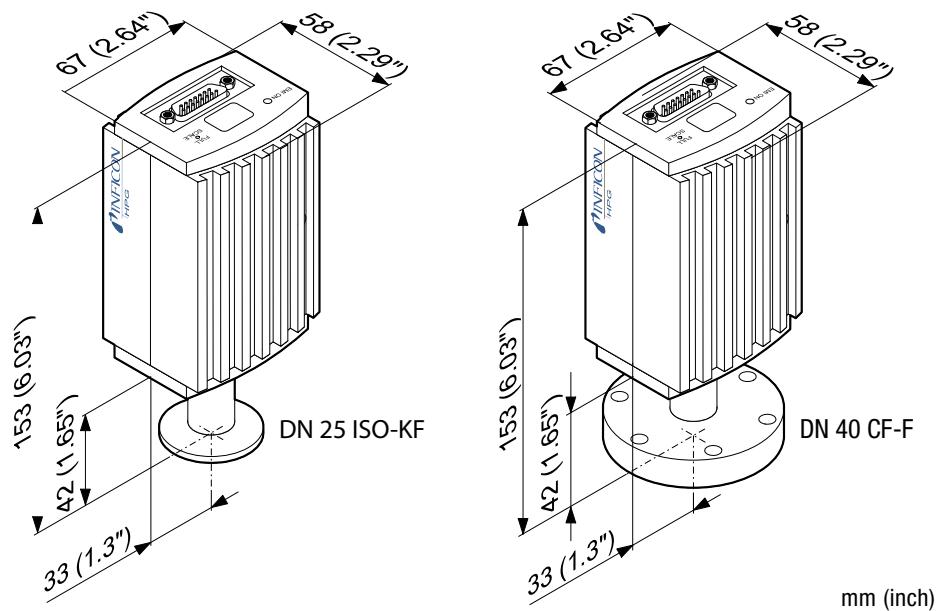

Accessories

Power supply 24 V DC / RS232C line

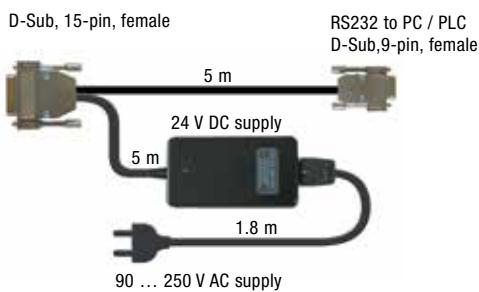

Bayard-Alpert Pirani Capacitance Diaphragm Gauge

TripleGauge® BCG450

The INFICON Bayard-Alpert Pirani Capacitance Diaphragm Gauge, BCG450, combines the advantages of three different technologies in a single, compact, economical package to measure process and base pressure from 5×10^{-10} to 1500 mbar (3.75×10^{-10} to 1125 Torr). The BCG450 is designed to take the place of three sensors (hot ion, convection enhanced Pirani and vacuum switch), thus reducing cost and valuable tool space.



Advantages

- BCG450 saves cost and tool space and reduces the complexity of vacuum measurement installation and setup
- Gas-type-independent pressure measurement above 10 Torr provides more reliable loadlock control for any gas-mixture
- Pirani interlock protects the hot filament from premature burnout
- Automatic high vacuum Pirani adjustment reduces operator interventions
- Differential pressure measurement at atmosphere eliminates uncertainty related to atmospheric pressure changes
- Easy-to-exchange sensing element with on-board calibration data guarantees reproducibility
- Optional graphic display and Fieldbus interfaces available
- RoHS compliance

Applications

- Pressure measurement in Semiconductor process, transfer and loadlock chambers
- Industrial coating
- General vacuum measurement and control on systems in the low to ultra high vacuum range



Ordering Information

Type	BCG450 without LCD	BCG450 with LCD	BCG450-SP with Profibus DP ²⁾	BCG450-SD with DeviceNet™ ²⁾	BCG450-SR with RS485 ¹⁾ ²⁾
DN 25 ISO-KF	353-550	353-552	353-554	353-557	353-559
DN 40 CF-R	353-551	353-553	353-556	353-558	353-560
Replacement sensor 25 ISO-KF	354-492	354-492	354-492	354-492	354-492
Replacement sensor 40 CF-R	354-493	354-493	354-493	354-493	354-493

¹⁾ on request

²⁾ not available with LCD

Accessories

Power supply 24V DC / RS 232 C line	353-511
Baffle	353-512
Centering ring with baffle DN 25 ISO-KF	211-113

TripleGauge® BCG450 (continued)**Specifications**

		BCG450 Standard	BCG450 Display
Measurement range	mbar (Torr)	5×10^{-10} to 1500 (3.75×10^{-10} to 1125)	
Accuracy	10 ⁻⁸ ... 50 mbar	% of reading	±15
	50 ... 950 mbar	% of reading	±5
	950 ... 1050 mbar	% of reading	±2.5
Repeatability	10^{-8} ... 10^{-2} mbar	% of reading	5
Hot ion emission on (selectable high / low, via RS232 / Fieldbus)	mbar	2×10^{-2} (high)	
	mbar	8×10^{-3} (low)	
Degas ¹⁾ p < 7.2×10^{-6}	mbar	electron bombardment, max. 3 min	
Pressure, max.	bar (absolute)	5	
Temperature			
Operation (ambient)	°C	0 ... +50	
Storage	°C	-20 ... +70	
Bakeout			
At flange	°C	80	
Electronics removed	°C	150	
Supply voltage	V / A DC	20 ... 28 / 0.8	
Output signal analog	V	0 ... 10.3	
Measurement range	V	0.774 ... 10.3	
Relation voltage / pressure	V / Decade	0.75	
Error signal	V	0.3 / 0.5	
Minimum load	kΩ	10	
Interface (digital) ²⁾		RS232C	
Connector		D-Sub, 15-pin, male	
Cable length, max. ³⁾	m (ft)	100 (330)	
Materials exposed to vacuum		Yt ₂ O ₃ , Ir, Mo, Cu, W, NiFe, NiCr, Al ₂ O ₃ , SnAg, stainless steel, glass	
Internal volume KF / CF	cm ³ (inch ³)	24 (1.46) / 34 (2.1)	
Weight KF / CF	g	285 / 550	
Degree of protection		IP30	

¹⁾ Reduced accuracy during degas²⁾ Simultaneous use of RS232C or VGC400 series controllers and Fieldbus is not allowed³⁾ For RS232C operation <30m

TripleGauge® BCG450 (continued)

Specifications (DeviceNet™)

BCG450-SD DeviceNet™		
Protocol	DeviceNet™, group 2 slave only	
Data rate switch	125, 250, 500 or network programmable	
Cable length		
125 kbps	m (ft)	500 (1650)
250 kbps	m (ft)	250 (825)
500 kbps	m (ft)	100 (330)
MAC ID	2 switches (address 00 - 63) or network programmable	
Network size	Up to 64 nodes per segment	
Digital functions	Read pressure, select units: Torr, mbar, Pa Degas function Monitor gauge status Safe state allows definition of behavior in case of error Detailed alarm and warning information	
Analog functions	0 ... 10 V analog output pressure indication two setpoint relays A + B	
Visual communication indicators	LED network status (green / red) LED module status (green / red)	
Specification	DeviceNet™ "Vacuum Gauge Device Profile"	
Device type	"CG" for combination gauge	
I / O slave messaging	polling only	
Setpoint relays	2	
Range	mbar	1x10 ⁻⁹ ... 1400
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V / A DC	60 / 0.5
Connector		D-Sub, 15-pin, male
Supply voltage for DeviceNet™	V / A DC	11 ... 25 / 0.5
Supply voltage for gauge	V / A DC	20 ... 28 / 0.8
Connector for DeviceNet™		Microstyle, 5 pin
Connector for BCG (analog output, supply voltage, setpoints)		D-sub, 15-pin, male

TripleGauge® BCG450 (continued)**Specifications (Profibus DP)**


BCG450-SP Profibus DP		
Baud rates	kBaud	9.6 / 19.2 / 93.75 / 187.5 / 500
	MBaud	1.5 / 12
Address		2 switches (address 00 - 127) or network programmable
Digital functions		read pressure, select units: Torr, mbar, Pa degas function monitor gauge status safe state allows definition of behavior in case of error detailed alarm and warning information
Analog functions		0 ... 10 V analog output pressure indication two setpoint relays A + B
Setpoint relays		2
Range	mbar	1×10^{-9} ... 1400
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V / A DC	60 / 0.5
Connector for Profibus DP		D-Sub, 9-pin, female
Connector for BCG (analog output, supply voltage, setpoints)		D-Sub, 15-pin, male

Specifications (RS485)

BCG450-SR RS485		
Baud rates	kBaud	0.3 / 1.2 / 2.4 / 4.8 / 9.6 / 19.2 / 28.8
Address		2 switches (address 00 - 127) or network programmable
Digital functions		read pressure, select units: Torr, mbar, Pa degas function, Pirani full scale adjust monitor gauge status detailed alarm and warning information
Analog functions		0 ... 10 V analog output pressure indication two setpoint relays A + B
Setpoint relays		2
Range	mbar	1×10^{-9} ... 1400
Relay contact		n.o., potential free
Hysteresis	% of reading	10
Contact rating	V / A DC	60 / 0.5
Connector for RS485		D-Sub, 9-pin, male
Connector for BCG (analog output, supply voltage, setpoints)		D-Sub, 15-pin, male


TripleGauge® BCG450 (continued)

Dimensions

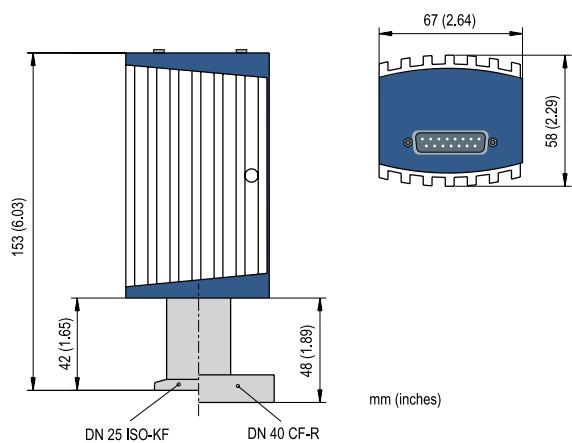

Accessories

Power supply 24 V DC / RS 232 C line

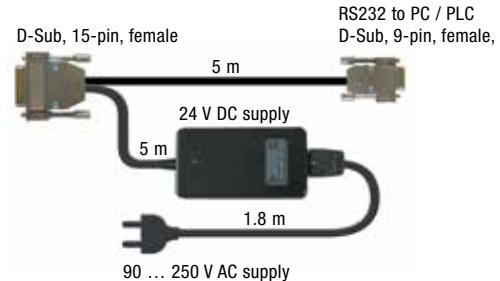

Baffle

Prevents contamination of the sensor.
Fast and easy installation.



Pirani Standard Gauge

PSG500-S, PSG502-S, PSG510-S, PSG512-S

The INFICON Pirani Standard Gauges, PSG500, PSG502-S, PSG510-S and PSG512-S, employ the most advanced digital Pirani technology available in the marketplace. The rugged stainless steel sensor cell and compact design qualify them for use on semiconductor systems and for standard applications, such as fore vacuum lines.



Advantages

- Easy push button ATM and HV adjustment
- Space saving rugged design
- Aluminum housing
- Mounts in any orientation
- All stainless steel measuring cell
- Logarithmic signal output for easy integration
- 10 bar absolute overpressure with threaded connections
- 250°C bakeable version
- Nickel filament option for corrosive applications
- Ceramic feedthrough for extremely corrosive applications (PSG510 & PSG512)
- Optional setpoints
- RoHS compliance

Applications

- Controlling high vacuum ionization gauges
- Fore vacuum pressure monitoring
- Safety circuits in vacuum systems
- General vacuum measurement and control in the fine and rough vacuum range

PSG500-S, PSG502-S, PSG510-S, PSG512-S (continued)

Ordering Information

Type Setpoints Filament	PSG500 none tungsten	PSG500-S two setpoints tungsten	PSG502-S two setpoints nickel	PSG510-S two setpoints tungsten	PSG512-S two setpoints nickel
DN 16 ISO-KF	350-060	350-080	350-140	350-200	350-300
DN 16 CF-R	350-062	350-082	350-142		
1/8" NPT	350-061	350-081	350-141		
8 VCR®	350-064	350-084	350-144		
4 VCR®	350-065	350-085	350-145		
1/2" tube	350-063	350-083	350-143		
7/16-20 UNF	350-066	350-086	350-146		
DN 16 ISO-KF long tube	350-067	350-087	350-147		
DN 16 CF-R long tube	350-068	350-088	350-148		
Replacement sensor					
Filament	tungsten		nickel	tungsten	nickel
DN 16 ISO-KF	350-920		350-900	350-930	350-940
DN 16 CF-R	350-922		350-902		
1/8" NPT	350-921		350-901		
8 VCR®	350-924		350-904		
4 VCR®	350-926		350-906		
1/2" tube	350-923		350-903		
7/16-20 UNF	350-925		350-905		
DN 16 ISO-KF long tube	350-927		350-907		
DN 16 CF-R long tube	350-928		350-908		

PSG500-S, PSG502-S, PSG510-S, PSG512-S (continued)

Specifications


Type Filament	PSG500 tungsten	PSG500-S tungsten	PSG502-S nickel	PSG510-S tungsten	PSG512-S nickel
Measuring principle				thermal conductance according to Pirani	
Measurement range (air, O ₂ , CO, N ₂)	mbar			5 x 10 ⁻⁴ to 1000	
Accuracy (N ₂)	1 x 10 ⁻³ ... 100 mbar	% of reading		±15%	
	5 x 10 ⁻⁴ ... 1 x 10 ⁻³ mbar	% of reading		±50%	
	100 ... 1000 mbar	% of reading		±50%	
Repeatability (air)	1 x 10 ⁻³ ... 100 mbar	% of reading		2%	
Output signal (measurement signal)					
Voltage range	V			0 ... +10.3	
Measurement range	V			+1.9 ... +10.0	
Voltage vs. pressure				logarithmic 1.286 V/decade	
Error signal	V			0 ... +0.5 (filament rupture)	
Output impedance	Ω			2 x 4.7	
Minimum loaded impedance	kΩ			10, short-circuit proof	
Response time	ms			80	
Gauge identification	kΩ			27.0, referenced to supply common	
Adjustment				one tactile switch for ATM and HV adjustment	
Setpoint		none		2	
Setting range	mbar			2 x 10 ⁻³ ... 500	
Hysteresis	% of reading			10% above lower threshold	
Relay contact	V DC / A DC			30 / 0.5 floating	
Switching time	ms			<20	
Supply voltage					
At gauge	V DC			+14 ... +30	
Ripple	V _{pp}			≤1	
Current consumption	mA			<500 (max. starting current)	
Power consumption	W			≤1	
Electrical connection				FCC 68 / RJ45 appliance connector, 8 poles, male	
Sensor cable				8 poles plus shielding	
Cable length	m			≤100 (8 x 0.14 mm ²)	
Materials exposed to vacuum				glass, Ni, NiFe	Al ₂ O ₃ , Ni,
				DIN 1.4301/1.4305/1.4435	DIN 1.3981/1.4305/1.4435
Filament		W	W	Ni	W
Internal volume					
DN 16 ISO-KF, DN 16 CF-R, 7/16-20 UNF	cm ³ (inch ³)			1.5 (0.092)	
DN 16 ISO-KF & DN 16 CF-R long tube	cm ³ (inch ³)			10 (0.61)	
1/8" NPT, 4 VCR, 8 VCR, 1/2" tube	cm ³ (inch ³)			2 (0.122)	
Admissible pressure	bar (absolute)			10, limited to inert gases	
Admissible temperature					
Operation	°C			+5 ... +60	
Vacuum connection ¹⁾	°C			80 / 250 ²⁾	
Storage	°C			-20 ... +65	
Mounting orientation				any	
Degree of protection				IP40	
Weight					
DN 16 ISO-KF, 7/16-20 UNF	g			80	
DN 16 CF-R, 4 VCR	g			100	
1/8" NPT, 1/2" tube	g			70	
8 VCR, DN 16 ISO-KF long tube	g			130	
DN 16 CF-R long tube	g			140	

¹⁾ In horizontal mounting orientation

²⁾ Long tube

PSG500-S, PSG502-S, PSG510-S, PSG512-S (continued)**Dimensions**

mm (inch)

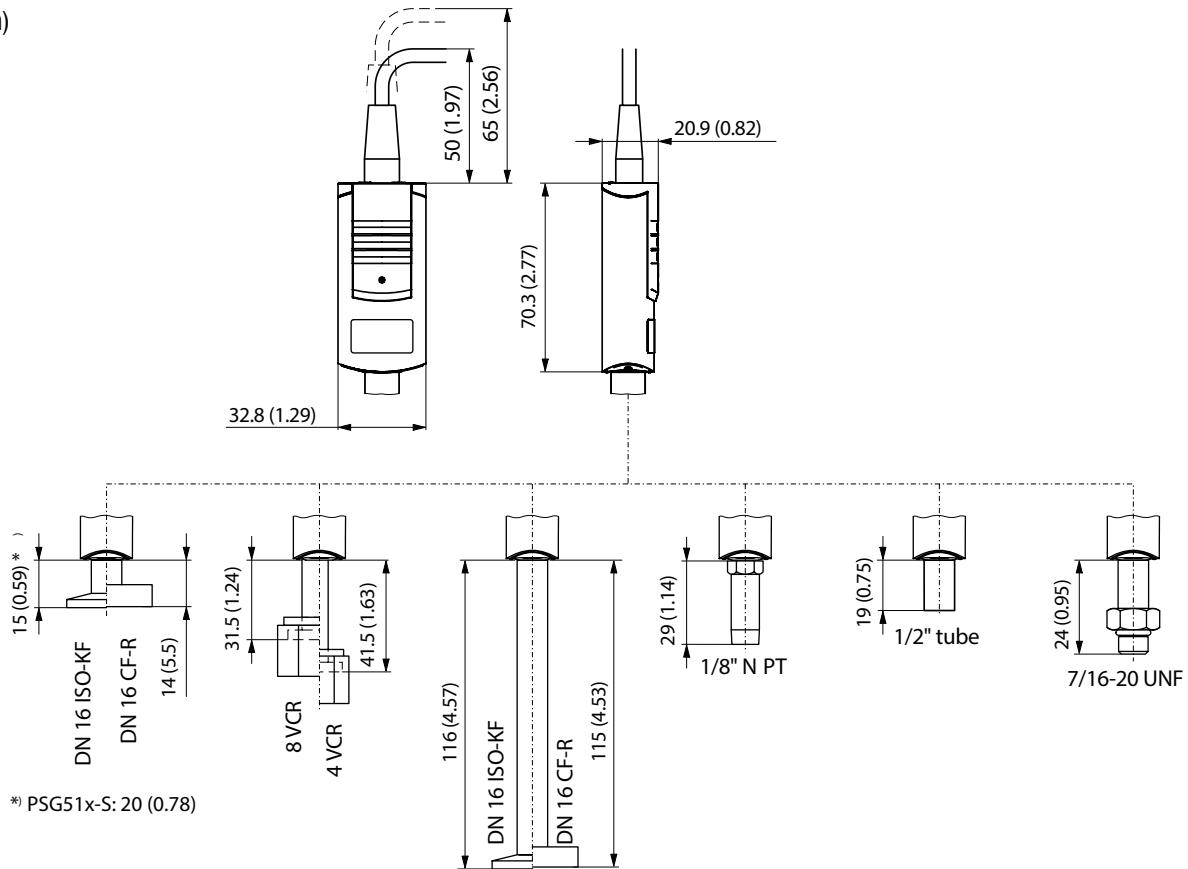

Pirani Standard Gauge

PSG550, PSG552, PSG554

The INFICON Pirani Standard Gauge (PSG55x) employs like his brothers PCG55x and PSG50x the most advanced digital Pirani technology available. The rugged sensor design combined with the compact size and the variety of features qualifies as the right product for measurement from low to the high vacuum range.



Advantages


- Available with Tungsten (PSG550) or Nickel (PSG552) filament or with a fully ceramic coated (PSG554) sensor unit for highly corrosive applications
- Optional display, setpoints and digital interfaces
- Easy to exchange plug & play sensor element with on-board calibration data - guarantees high reproducibility and low cost of ownership
- Selectable output signal and various plug versions for easy integration
- Mounts in any orientation - provides engineering freedom in tool design
- Diagnostic port on all versions
- Compliance & standards: CE, EN, UL, CSA, RoHS

Applications

- Fore vacuum pressure measurement
- Safety circuits in vacuum systems
- General vacuum measurement and control from low to the high vacuum range

PSG550, PSG552, PSG554 (continued)

Ordering Information

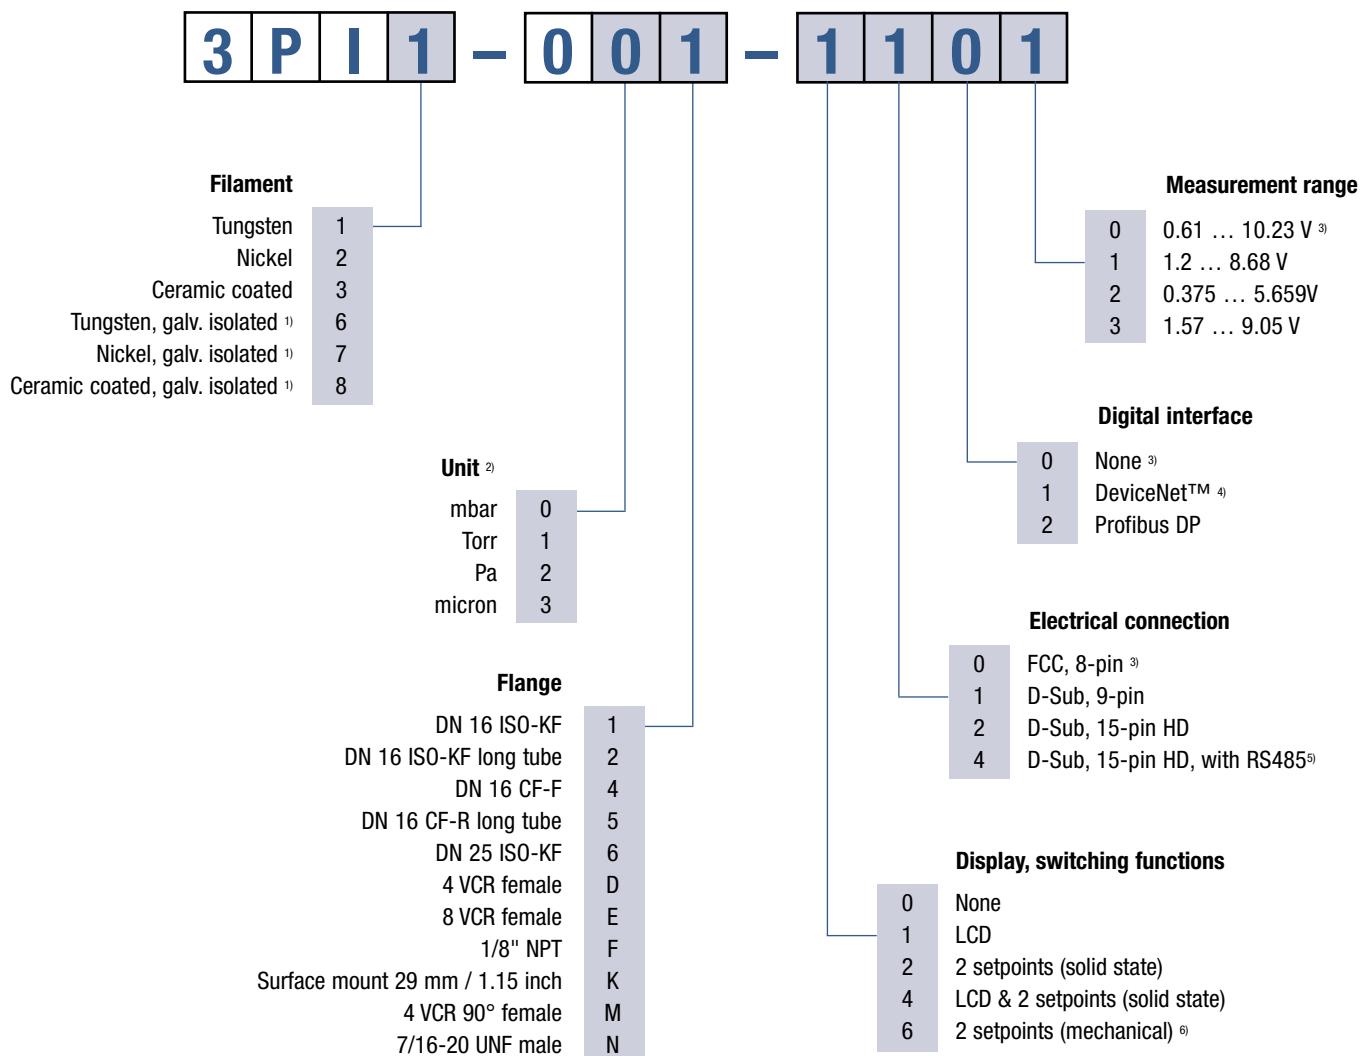

- ¹⁾ Only with D-Sub 9-pin connector available
- ²⁾ When selecting LCD (liquid crystal display) choose desired pressure unit
- ³⁾ Choose these settings when using an INFICON VGC40x or PGD400 controller
- ⁴⁾ Only with D-Sub 9-pin connector and galvanically isolated available
- ⁵⁾ Only without additional digital interface available
- ⁶⁾ Only with D-Sub 9-pin connector without LCD available

PSG550, PSG552, PSG554 (continued)**Specifications (continued)**

Type Filament	PSG550 Tungsten	PSG552 Nickel	PSG554 ceramic coated
Measurement range	mbar (Torr)	$5 \times 10^{-5} \dots 1000$	$(3.8 \times 10^{-5} \dots 750)$
Accuracy (N_2)	5×10 ⁻⁴ ... 1×10 ⁻³ mbar 1×10 ⁻³ ... 100 mbar 100 ... 1000 mbar	% of reading % of reading % of reading	±50 ±15 ±50
Repeatability (N_2)	1×10 ⁻³ ... 100 mbar	% of reading	±2
Admissible pressure	bar (absolute)		≤5
Pressure, max.	bar (absolute)		10
Admissible temperature			
Operation (ambient)	°C	+10 ... +50	
Storage	°C	-20 ... +65	
Bakeout at flange	°C	≤80	
Long tube	°C	≤250	
Supply voltage	V / A DC		+15 ... +30
Power consumption			
Without fieldbus	W		≤2.5
DeviceNet™	W		≤3
Profibus	W		≤3
Output signal analog			
3Plx-0xx-xxx0	V	0 ... +10	
-xxx1	V	0 ... +8.5	
-xxx2	V	0 ... +5.529	
-xxx3	V	0 ... +8.875	
Measuring range			
3Plx-0xx-xxx0	V	+0.61 ... +10	
-xxx1	V	+1.2 ... +8.5	
-xxx2	V	+0.375 ... +5.529	
-xxx3	V	+1.57 ... +8.875	
Voltage vs. pressure			
3Plx-0xx-xxx0	V / Decade	1.286	
3Plx-0xx-xxx1 / -xxx2 / -xxx3	V / Decade	1	
Load impedance	kΩ	>10	
Setpoint relay		2	
Range (N_2)	mbar	$5 \times 10^{-5} \dots 1000$	
Relay contact		n.o., potential free	
Hysteresis	% of threshold	10	
Contact rating			
Solid state relays	V / A DC	≤30 / ≤0.3	
Mechanical relays	V / A DC	≤30 / ≤1	
Switching time	ms	≤30	
Interface (digital)		RS232C	
Electrical connection			
3Plx-0xx-x0xx		FCC, 8-pin	
-x1xx		D-Sub, 9-pin, male	
-x2xx		D-Sub, 15-pin HD, male	
-x4xx		D-Sub, 15-pin HD, with RS485, male	
Cable length	m (ft)	≤100 (≤330)	
RS232C operation	m (ft)	≤30 (≤100)	
Materials exposed to vacuum	W, Ni, NiFe, glass, SnAg, stainless steel	Ni, NiFe, glass, SnAg, stainless steel	Al ₂ O ₃ , stainless steel

(continued)

PSG550, PSG552, PSG554 (continued)**Specifications (concluded)**

Type Filament	PSG550 Tungsten	PSG552 Nickel	PSG554 ceramic coated
Internal volume			
DN 16 ISO-KF	cm ³	4.7	
DN 16 ISO-KF long tube	cm ³	14.5	
DN 16 CF-F	cm ³	8	
DN 16 CF-R long tube	cm ³	14	
DN 25 ISO-KF, 4 VCR	cm ³	5.5	
8 VCR	cm ³	7	
1/8" NPT, 7/16-20 UNF	cm ³	5.2	
Surface mount 29 mm/1.15 inch	cm ³	4.9	
4 VCR 90°	cm ³	7.9	
Weight			
Without fieldbus interface	g	115 ... 130	
With fieldbus interface	g	230 ... 250	
Degree of protection		IP 40	
Standards		EN 61000-6-2/-6-3, EN 61010, UL 61010-1, CSA 22.2 No. 61010-1	

SPECIFICATIONS DeviceNet™

Protocol	DeviceNet™, group 2 slave only		
Data rate switch	kBaud 125, 250, 500 or network programmable		
Cable length			
125 kbps	m (ft)	500 (1650)	
250 kbps	m (ft)	250 (825)	
500 kbps	m (ft)	100 (330)	
MAC ID	2 switches (address 00 - 63) or network programmable		
Digital functions	read pressure, select units: Torr, mbar, Pa, micron, counts monitor gauge status, detailed alarm and warning information, safe state allows definition of behavior in case of error		
Specification	DeviceNet™ "Vacuum Gauge Device Profile"		
Device type	"CG" for combination gauge		
I / O slave messaging	polling only		
Supply voltage for DeviceNet™			
3PI6- / 3PI7- / 3PI8-0xx-xxxx	V / A DC	+15 ... +30	
Power consumption			
3PI6- / 3PI7- / 3PI8-0xx-xxxx	W	≤3	
Connector for DeviceNet	Micro-Style, 5-pin, male		

SPECIFICATIONS Profibus DP

Baud rates	kBaud MBaud	9.6 / 19.2 / 93.75 / 187.5 / 500 1.5 / 12
Address	2 switches (address 00 - 127) or network programmable	
Digital functions	read pressure, select units: Torr, mbar, Pa, micron, counts monitor gauge status, detailed alarm and warning information, safe state allows definition of behavior in case of error	
Connector for Profibus DP	D-Sub, 9-pin, female	

PSG550, PSG552, PSG554 (continued)

SPECIFICATIONS RS485C

Baud rates	kBaud	9.6 / 19.2 / 38.4 / 57.6
Address		2 switches (address 00 - 255)
Digital functions		read pressure, select units: Torr, mbar, Pa, micron, counts monitor gauge status, detailed alarm and warning information, safe state allows definition of behavior in case of error
Connector for RS485		D-Sub, 15-pin HD, male

SPARE PARTS

Type Filament	PSG550 Tungsten	PSG552 Nickel	PSG554 ceramic coated	
Replacement sensor	DN 16 ISO-KF DN 16 ISO-KF long tube DN 16 CF-F DN 16 CF-R long tube DN 25 ISO-KF 4 VCR female 8 VCR female 1/8" NPT Surface mount 29 mm/1.15 inch 4 VCR 90° female 7/16-20 UNF male	355-925 355-926 355-927 355-928 355-929 355-932 355-931 355-930 355-934 355-935 355-933	355-936 355-937 355-938 355-939 355-940 355-943 355-942 355-941 355-945 355-946 355-944	355-947 355-948 355-949 355-950 355-951 355-954 355-953 355-952 355-956 355-957 355-955


ACCESSORIES

Centering ring with filter (DN 16 ISO-KF)	211-097
Diagnostic ¹⁾ : Communication adapter (2 m) for PC RS232C serial port	303-333

¹⁾ Software to run the diagnostic functions on Windows NT, XP can be downloaded from our website.

PSG550, PSG552, PSG554 (continued)

Dimensions

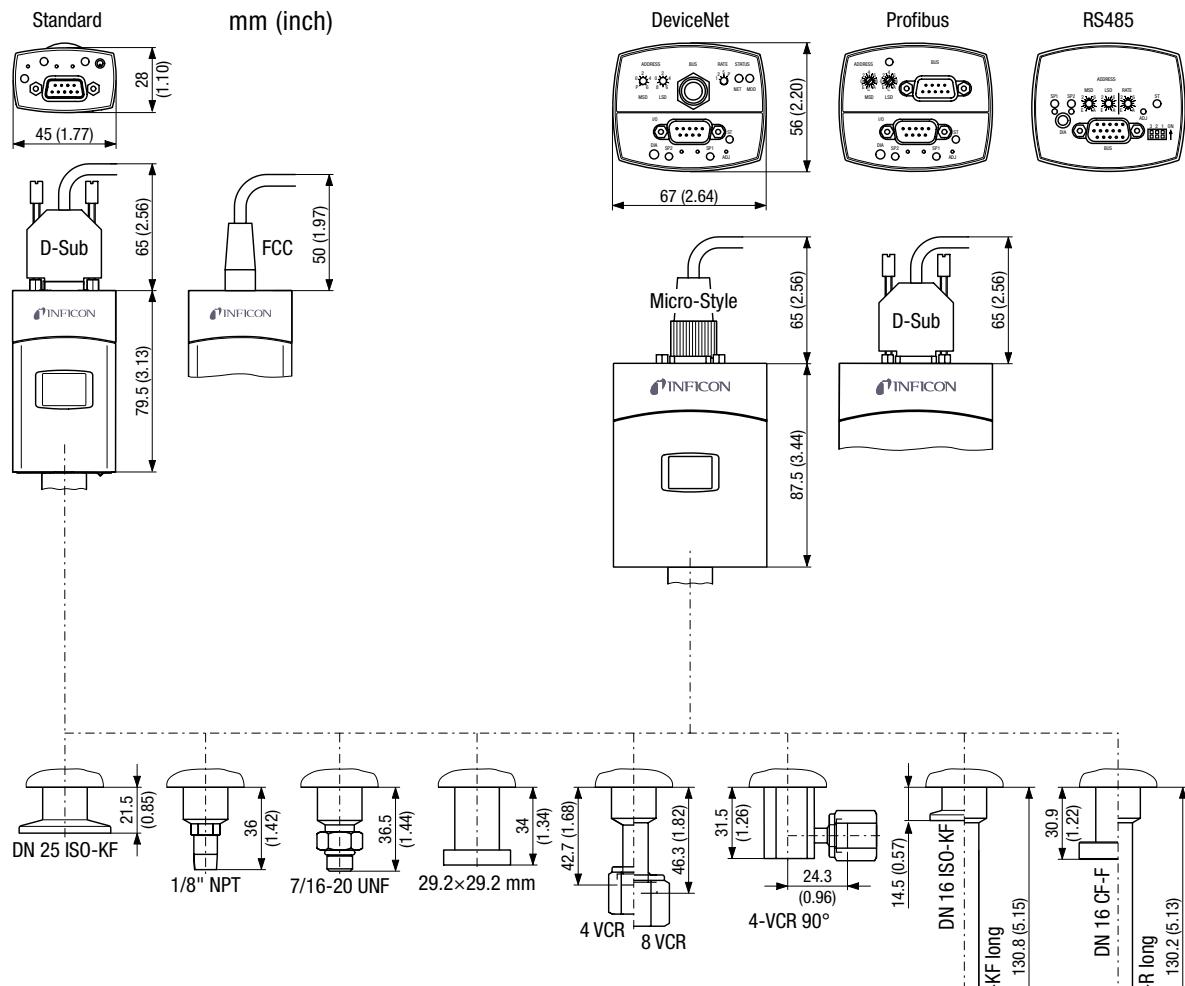

Pirani Capacitance Diaphragm Gauge

PCG550, PCG552, PCG554

The INFICON Pirani Capacitance Diaphragm Gauge (PCG55x) combines the INFICON Pirani technology with the advantages of a ceramic capacitance diaphragm sensor in a single product.

In the measurement range between 10 mbar and atmosphere the capacitance diaphragm technology provides gas-type independent, highly accurate values for reliable pressure measurement. The PCG55x offers also a variety of features which allows the right product configuration for the demanded application..



Advantages


- Gas-type independent above 10 mbar – allows safe venting with any gas mixture
- High accuracy and reproducibility at atmosphere – for reliable atmospheric pressure detection
- Fast atmospheric detection – eliminates waiting time and shortens process cycle
- Versatile of mounting orientation – provides engineering freedom in tool design
- Available with Tungsten (PCG550) or Nickel (PCG552) filament or with a fully ceramic coated (PCG554) sensor unit for highly corrosive applications
- Easy to exchange plug & play sensor element with on-board calibration data – guarantees high reproducibility and low cost of ownership
- Selectable output signal for easy integration
- Optional atmospheric switch, display and digital interfaces
- Diagnostic port on all versions
- Compliance & standards: CE, EN, UL, CSA, RoHS

Applications

- Load Lock control
- Fore vacuum pressure measurement
- Safety circuits in vacuum systems
- General vacuum measurement and control in the medium and rough vacuum range

PCG550, PCG552, PCG554 (continued)

Ordering Information

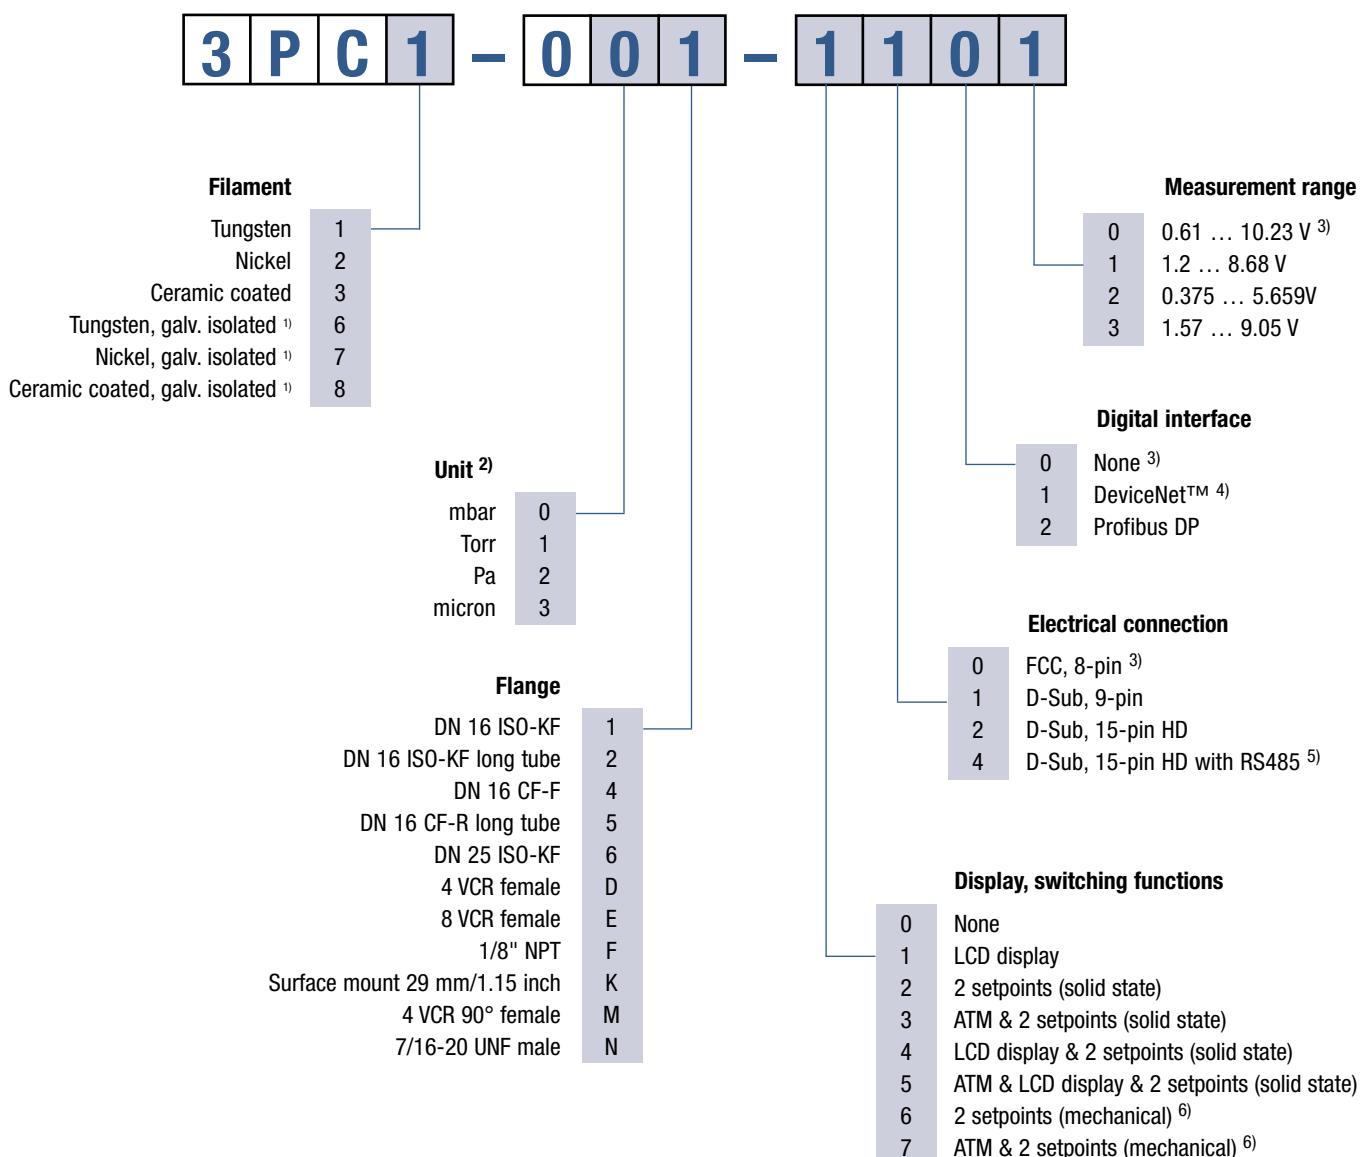¹⁾ Only with D-Sub 9-pin connector available²⁾ When selecting LCD (liquid crystal display) choose desired pressure unit³⁾ Choose these settings when using an INFICON VGC40x controller⁴⁾ Only with D-Sub 9-pin connector and galvanically isolated available⁵⁾ Only without additional digital interface available⁶⁾ Only with D-Sub 9-pin connector without LCD display available

PCG550, PCG552, PCG554 (continued)

Specifications

Type Filament	PCG550 Tungsten	PCG552 Nickel	PCG554 ceramic coated
Measurement range	mbar (Torr)	$5 \times 10^{-5} \dots 1500$ (3.8 × 10 ⁻⁵ ... 1125)	
Accuracy	5 × 10 ⁻⁴ ... 1 × 10 ⁻³ mbar (N ₂) 1 × 10 ⁻³ ... 100 mbar (N ₂) 100 ... 950 mbar 950 ... 1050 mbar	% of reading % of reading % of reading % of reading	±50 ±15 ±5 ±2.5
Repeatability	1 × 10 ⁻³ ... 1100 mbar (N ₂)	% of reading	±2
Admissible pressure	bar (absolute)		≤5
Pressure, max.	bar (absolute)		≥10
Admissible temperature			
Operation (ambient)	°C	+10 ... +50	
Storage	°C	-20 ... +65	
Bakeout at flange	°C	≤80	
Long tube	°C	≤250	
Supply voltage	V / A DC		+15 ... +30
Power consumption			
Without fieldbus	W		≤2.5
DeviceNet™	W		≤3
Profibus	W		≤3
Output signal analog			
3PCx-0xx-xxx 0	V	0 ... +10.23	
-xxx 1	V	0 ... +8.68	
-xxx 2	V	0 ... +5.659	
-xxx 3	V	0 ... +9.05	
Measuring range			
3PCx-0xx-xxx 0	V	+0.61 ... +10.23	
-xxx 1	V	+1.2 ... +8.68	
-xxx 2	V	+0.375 ... +5.659	
-xxx 3	V	+1.57 ... +9.05	
Voltage vs. pressure			
3PCx-0xx-xxx 0	V / Decade	1.286	
3PCx-0xx-xxx 1 / -xxx 2 / -xxx 3	V / Decade	1	
Load impedance	kΩ	>10	
Setpoint relay		2	
Range (N ₂)	mbar	$5 \times 10^{-5} \dots 1500$	
Relay contact		n.o., potential free	
Hysteresis	% of threshold	10	
Contact rating			
Solid state relays	V / A DC	≤30 / ≤0.3	
Mechanical relays	V / A DC	≤30 / ≤1	
Switching time	ms	≤30	
Interface (digital)		RS232C	
Electrical connection			
3PCx-0xx-x0xx		FCC, 8-pin	
-x1xx		D-Sub, 9-pin, male	
-x2xx		D-Sub, 15-pin HD, male	
-x4xx		D-Sub, 15-pin HD with RS485, male	
Cable length	m (ft)	≤100 (≤330)	
RS232C operation	m (ft)	≤30 (≤100)	

(continued)

PCG550, PCG552, PCG554 (continued)**Specifications (concluded)**

Type Filament	PCG550 Tungsten	PCG552 Nickel	PCG554 ceramic coated
Materials exposed to vacuum	W, Ni, NiFe, Al ₂ O ₃ , SnAg, stainless steel, glass	Ni, NiFe, Al ₂ O ₃ , SnAg, stainless steel, glass	Al ₂ O ₃ , stainless steel
Internal volume			
DN 16 ISO-KF	cm ³	4.7	
DN 16 ISO-KF long tube	cm ³	14.5	
DN 16 CF-F	cm ³	8	
DN 16 CF-R long tube	cm ³	14	
DN 25 ISO-KF, 4 VCR	cm ³	5.5	
8 VCR	cm ³	7	
1/8" NPT, 7/16-20 UNF	cm ³	5.2	
Surface mount 29 mm/1.15 inch	cm ³	4.9	
4 VCR 90°	cm ³	7.9	
Weight			
Without fieldbus interface	g	115 ... 130	
With fieldbus interface	g	230 ... 250	
Degree of protection		IP 40	
Standards		EN 61000-6-2/-6-3, EN 61010, UL 61010-1, CSA 22.2 No. 61010-1	

Specifications DeviceNet™

Protocol	DeviceNet™, group 2 slave only		
Data rate switch	kBaud 125, 250, 500 or network programmable		
Cable length			
125 kbps	m (ft)	500 (1650)	
250 kbps	m (ft)	250 (825)	
500 kbps	m (ft)	100 (330)	
MAC ID	2 switches (address 00 - 63) or network programmable		
Digital functions	read pressure, select units: Torr, mbar, Pa, micron, counts monitor gauge status, detailed alarm and warning information, safe state allows definition of behavior in case of error		
Specification	DeviceNet™ "Vacuum Gauge Device Profile"		
Device type	"CG" for combination gauge		
I / O slave messaging	polling only		
Supply voltage for DeviceNet™			
3PC6- / 3PC7- / 3PC8-0xx-xxxx	V / A DC	+15 ... +30	
Power consumption			
3PC6- / 3PC7- / 3PC8-0xx-xxxx	W	≤3	
Connector for DeviceNet	Micro-Style, 5-pin, male		

Specifications Profibus DP

Baud rates	kBaud MBaud	9.6 / 19.2 / 93.75 / 187.5 / 500 1.5 / 12
Address	2 switches (address 00 - 127) or network programmable	
Digital functions	read pressure, select units: Torr, mbar, Pa, micron, counts monitor gauge status, detailed alarm and warning information, safe state allows definition of behavior in case of error	
Connector for Profibus DP	D-Sub, 9-pin, female	

PCG550, PCG552, PCG554 (continued)

Specifications RS485C

Baud rates	kBaud	9.6 / 19.2 / 38.4 / 57.6
Address		2 switches (address 00 - 255)
Digital functions		read pressure, select units: Torr, mbar, Pa, micron, counts monitor gauge status, detailed alarm and warning information, safe state allows definition of behavior in case of error
Connector for RS485		D-Sub, 15-pin HD, male

Spare Parts

Type		PCG550 Tungsten	PCG552 Nickel	PCG554 ceramic coated
Filament				
Replacement sensor	DN 16 ISO-KF	357-925	357-936	357-947
	DN 16 ISO-KF long tube	357-926	357-937	357-948
	DN 16 CF-F	357-927	357-938	357-949
	DN 16 CF-R long tube	357-928	357-939	357-950
	DN 25 ISO-KF	357-929	357-940	357-951
	4 VCR female	357-932	357-943	357-954
	8 VCR female	357-931	357-942	357-953
	1/8" NPT	357-930	357-941	357-952
	Surface mount 29 mm/1.15 inch	357-934	357-945	357-956
	4 VCR 90° female	357-935	357-946	357-957
	7/16-20 UNF male	357-933	357-944	357-955


Accessories

Centering ring with filter (DN 16 ISO-KF)	211-097
Diagnostic ¹⁾ : Communication adapter (2 m) for PC RS232C serial port	303-333

¹⁾ Software to run the diagnostic functions on Windows NT, XP can be downloaded from our website.

PCG550, PCG552, PCG554 (continued)

Dimensions, Internal Volume, Weight

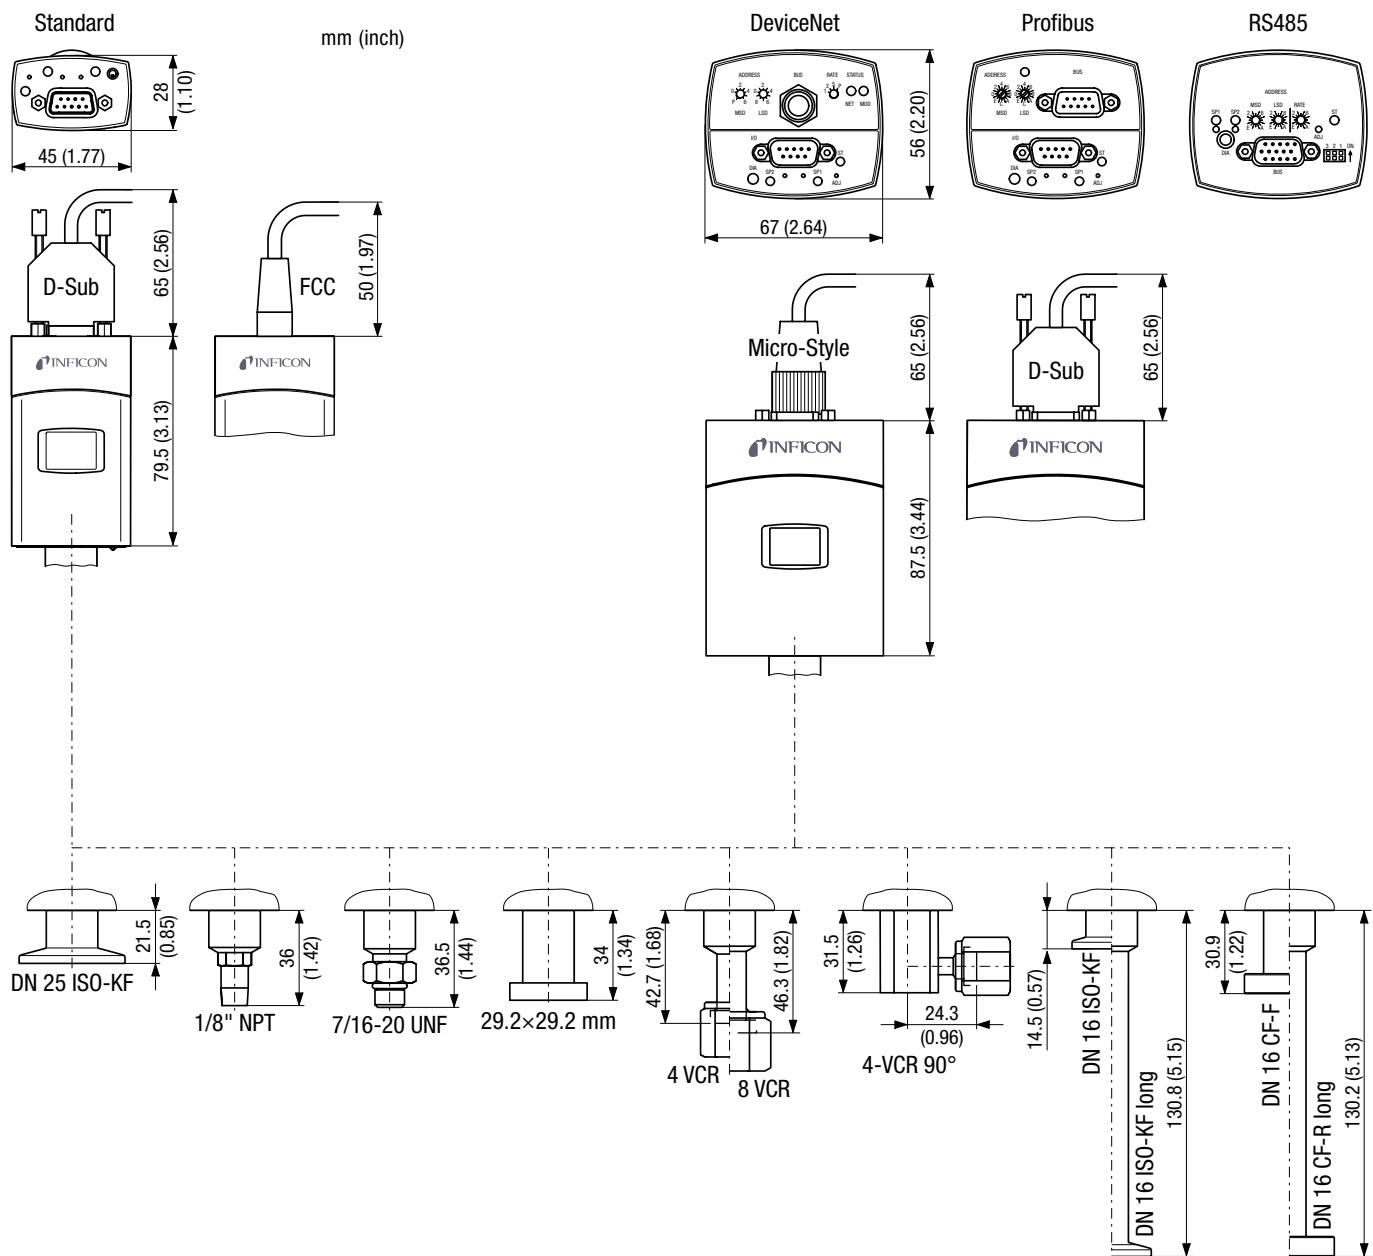

Penning Gauge

PEG100

The INFICON Penning Gauge PEG100 provides reliable high vacuum measurements. The rugged Penning cold cathode sensor has no filament to burn out. Due to titanium cathode plates and the reduced high voltage after plasma ignition, the gauge can be operated also in sputtering applications. The fieldbus options, in addition to the logarithmic analog output signal, allow easy integration into vacuum systems using Profibus DP or DeviceNet protocols.



ADVANTAGES

- Wide measurement range from 1×10^{-9} to 1×10^{-2} mbar (7.5×10^{-10} to 7.5×10^{-3} Torr)
- All-metal cold cathode sensor (Penning) with ceramic feedthrough
- Innovative electrode geometry provides excellent ignition properties
- Decreased high voltage after plasma ignition and titanium cathode plates reduce risk of contamination, even during sputtering operations with argon
- The anode ring and the titanium cathode can be cleaned or replaced easily
- Minimal magnetic field intensity adjacent to gauge
- LED indicator for power on and plasma ignited
- Logarithmic analog output signal
- Fieldbus interface (Profibus DB, DeviceNet) for easy integration into vacuum systems using network communications

APPLICATIONS

- High vacuum pressure monitoring
- Evaporation and sputtering systems
- General vacuum measurement and control in the fine and high vacuum range

Ordering Information

Type	PEG100	PEG100-D with DeviceNet™	PEG100-P with Profibus DP™
DN 25 ISO-KF	351-000	351-003	351-005
DN 40 CF-R	351-002	351-004	—
Replacement cathode plates, titanium Set of 5 pieces	351-490	351-490	351-490

PEG100 (continued)**Specifications**

PEG100		
Measurement range	mbar Torr	1×10^{-9} to 1×10^{-2} 7.5×10^{-10} to 7.5×10^{-3}
Accuracy	10^{-8} to 10^{-4} mbar	% of reading ± 30
Pressure, max. (absolute)	bar	10
Temperature		
Operation (ambient)	°C	+10 to +50
Storage	°C	-20 to +75
Bakeout		
without electronics	°C	350
with electronics, at flange	°C	70
Supply		
Voltage	V DC	14.5 to 36
Consumption, max.	W	<2
Output signal analog	V	0 to 10.6
Measurement range	V	0.66 to 10
Relation voltage / pressure	V / Decade	1.333
Connector		FCC 68, female, 8 pin (shielded)
Cable length, max. (analog)	m (ft)	100 (330)
Materials exposed to vacuum		Stainless steel, CrNi, Al ₂ O ₃ , NiFe, Mo, Cu, Ni, Ti
Internal volume	cm ³ (inch ³)	21 (1.28)
Weight, approx.	g	500
Protection type		IP40

Specifications**PEG100-D DeviceNet™**


Device type	generic
Explicit peer to peer messaging	no
I / O peer to peer messaging	no
Configuration consistency value	no
Faulted node recovery	no
Baud rates	kBaud
Master / Scanner	no
I / O slave messaging	
Bit Strobe	yes
Polling	yes
Cyclic	yes
Change of State (COS)	yes
Supply for DeviceNet™	V DC
Connector for DeviceNet™	Phoenix Combicon, 5 pin

Specifications**PEG100-P Profibus DP™**

Supported baud rates (auto detection)	kBaud	9.6 / 19.2 / 93.75 / 187.5 / 500 / 1500
Expanded user parameter data	Bytes	5
Configuring		
Number of input and output data	2	
Sync-Mode and Freeze-Mode	Yes	
Connector	D-sub, 9 pin	

PEG100 (continued)

Dimensions

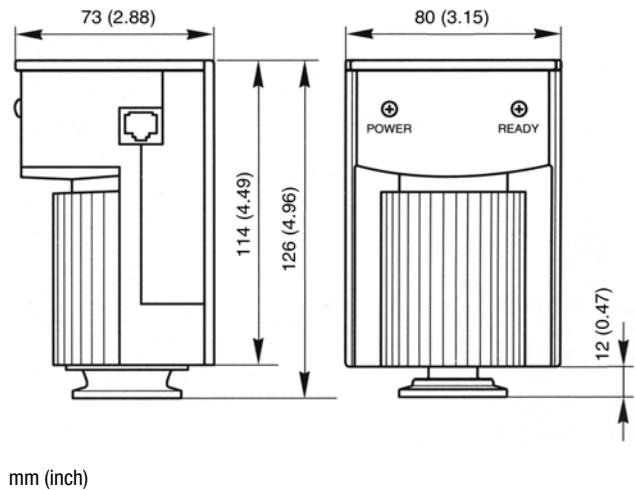

mm (inch)

Inverted Magnetron Pirani Gauge

MPG400/401

The INFICON Inverted Magnetron Pirani Gauges, MPG400 and MPG401, measure from 5×10^{-9} mbar to atmosphere (3.8×10^{-9} Torr to atmosphere). Combining technologies into one single compact unit with one logarithmic analog output signal significantly reduces the complexity of installation, setup and integration.



ADVANTAGES

- Combination gauge – Inverted Magnetron & Pirani
- Wide measurement range from 5×10^{-9} mbar to atmosphere
- No filament to burn out
- Excellent ignition properties
- Easy to clean
- FPM or metal-sealed feedthrough
- LED indicator for high voltage on
- Logarithmic analog output signal

APPLICATIONS

- High vacuum pressure monitoring
- Base pressure for evaporation and sputtering systems
- General vacuum measurement and control in the medium and high vacuum range

Ordering Information

Type	MPG400	MPG401
	FPM sealed	metal-sealed
DN 25 ISO-KF	351-010	351-020
DN 40 ISO-KF	351-011	351-021
DN 40 CF-F	351-012	351-022


Accessories

Type	MPG400	MPG401
Magnetic shield	FPM sealed	metal-sealed

MPG400/401 - continued**Specifications**

		MPG400 FPM sealed	MPG401 metal-sealed
Measurement range (air, N ₂)	mbar (Torr)	5 x 10 ⁻⁹ ... 1000 (3.8 x 10 ⁻⁹ ... 760)	
Accuracy (N ₂)	1 x 10 ⁻⁸ ... 100 mbar	% of reading	≈±30%
Repeatability	1 x 10 ⁻⁸ ... 100 mbar	% of reading	≈±5%
Mounting orientation			any
Admissible pressure	bar (absolute)	≤10 (limited to inert gases)	
Admissible temperature			
Operation (ambient)	°C	+5 ... +55	
Storage	°C	-40 ... +65	
Bake-out ¹⁾	°C	150	
Filament temperature (Pirani)	°C	120	
Supply voltage			
At gauge	V DC	+15 ... +30	
At supply unit with max. cable length ²⁾	V DC	+16 ... +30	
Ripple	V _{pp}	≤1	
Power consumption	W	≤2	
Fuse to be connected	AT	≤1	
Output signal (measurement signal)			
Voltage range	V	0 ... +10.5	
Measurement range	V	+1.82 ... +8.6	
Voltage vs. pressure		logarithmic, 0.6 V/decade	
Error signal	V	<0.5 (no supply)	
	V	>9.5 (Pirani sensor, filament rupture)	
Output impedance	Ω	2 x 10	
Minimum loaded impedance	kΩ	10, short-circuit proof	
Response time p > 10 ⁻⁶ mbar	ms	<10	
p = 10 ⁻⁸ mbar	ms	≈1000	
Identification gauge	kΩ	85, referenced to supply common	
Status			
Pirani-only mode	V	0 (low)	
Combined Pirani / cold cathode mode	V	15 ... 30 (high)	
LED	LED green	high voltage on	
Electrical connection		FCC 68 appliance connector, 8 poles, female	
Sensor cable		8 poles plus shielding	
Cable length	m	≤50 (8 x 0.14 mm ²)	
Operating voltage	kV	≤3.3	
Operating current	µA	≤500	
Materials exposed to vacuum		stainless steel, Al ₂ O ₃ , FPM75, Mo, Ni, Au, W	stainless steel, Al ₂ O ₃ , Ag, Cu, Sn Mo, Ni, Au, W
Internal volume	cm ³	≈20	
Weight			
DN 25 ISO-KF	g	≈700	≈730
DN 40 ISO-KF	g	≈720	≈750
DN 40 CF-F	g	≈980	≈1010
Protection category		IP 40	
Standards		EN 61000-6-2, EN 61000-6-3, EN 61010-1	

¹⁾ Without electronics and magnetic shielding.²⁾ The minimum voltage of the supply unit must be increased proportionally to the length of the sensor cable.

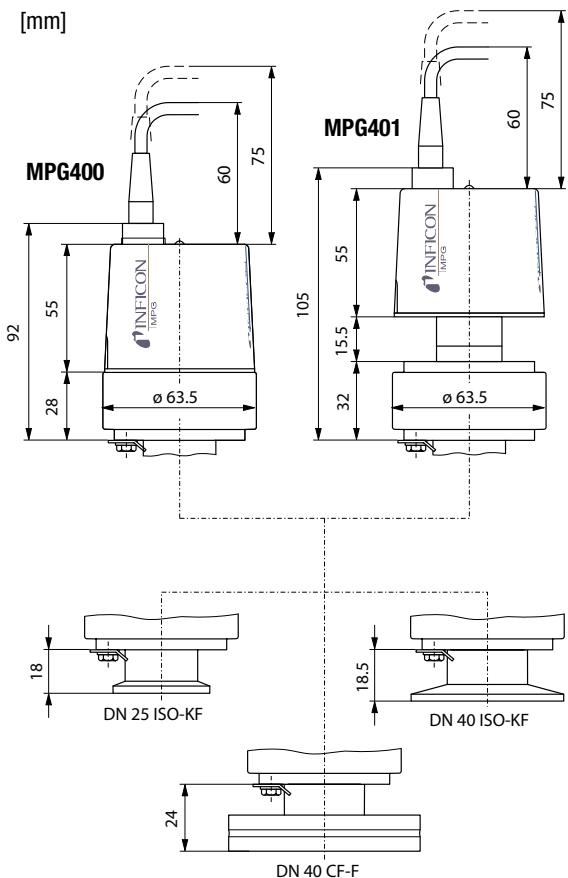MPG400/401 – continued**Dimensions****Spare Parts**

Type	MPG400 FPM sealed	MPG401 metal-sealed
Maintenance kit includes: support/centering ring seals ignition aid	351-999	351-997
Repair kit includes: Pirani element anode anode extension ¹⁾ Cu seal ¹⁾ screw fitting support/centering ring seals ignition aid	351-998	351-996
Ignition aid kit includes: ignition aid	351-995	351-995
Mounting tool for ignition aid	351-994	351-994

¹⁾ MPG401 only

Vacuum Gauge Controllers

VGC401, VGC402, VGC403

VGC401



VGC402



VGC403



Your complete solution for process measurement and control.

Compatible with all INFICON active gauges, the VGC400 series of controllers can monitor the entire pressure range from 10^{-10} to 1500 mbar (10^{-10} to 1125 Torr) and the setpoint status.

Advantages

- Automatic identification of the connected INFICON gauges
- User selectable measurement unit (mbar, Torr, Pascal, micron)
- High resolution – 16 bit A/D converter
- Up to six adjustable setpoints with adjustable hysteresis may be assigned to any channel
- Compliance & standards: CE, ETL, RoHS
- Programmable 0 to 10 V chart recorder output with logarithmic / linear characteristics for each gauge or gauge combination (VGC402/403 only)
- Firmware upgrades available on-line are easily downloaded via the RS232 interface
- Versatile, compact bench-top model design can easily be mounted in a panel or 19" rack
- Wide range power supply 90 to 250V, 50 to 60Hz

Ordering Information

Type	VGC401	VGC402	VGC403
Vacuum Gauge Controller	398-010	398-020	398-021
Adapter for rack mount 2HE / 3HE	398-499	–	–

Accessories

Gauges	PCG, PEG, PSG, MPG	BAG, BCG, BPG, HPG CDG	CDG (unheated)
Signal read out / communication	analog	digital analog possible	analog
Connector	FCC / FCC	D-Sub / D-Sub	FCC / D-Sub
Cable to VGC401/402/403 in m (ft)			
3 (9.9)	398-500	398-520	398-540
5 (16.5)	398-501	398-521	398-541
10 (33.0)	398-502	398-522	398-542
15 (49.5)	398-503	398-523	398-543
20 (66.0)	398-504	398-524	398-544
30 (99.0)	398-505	398-525	398-545

other lengths on request


VGC401, VGC402, VGC403 (continued)**Specifications**

Type	VGC401	VGC402	VGC403	
Measurement channels	1	2	3	
Display	LED	LCD	LCD	
Range	mbar (Torr)	$2 \times 10^{-10} \dots 1500$ $(1.5 \times 10^{-10} \dots 1125)$	$5 \times 10^{-10} \dots 1500$ $(3.75 \times 10^{-10} \dots 1125)$	$5 \times 10^{-10} \dots 1500$ $(3.75 \times 10^{-10} \dots 1125)$
Rate	1/s	10	10	
A/D converter	bit	16	16	
Connectable gauges with display range				
CDG (A/D)	mbar	$1 \times 10^{-3} \times \text{FS} \dots 1 \times \text{FS}$		
PCG550 ¹⁾	mbar / Torr	$5 \times 10^{-4} \dots 1500 / 3.75 \times 10^{-4} \dots 1125$		
PSG	mbar / Torr	$5 \times 10^{-4} \dots 1000 / 3.75 \times 10^{-4} \dots 750$		
MPG	mbar / Torr	$5 \times 10^{-9} \dots 1000 / 3.75 \times 10^{-9} \dots 750$		
PEG	mbar / Torr	$1 \times 10^{-9} \dots 1 \times 10^{-2} / 7.5 \times 10^{-10} \dots 7.5 \times 10^{-3}$		
BCG	mbar / Torr	$5 \times 10^{-10} \dots 1500 / 3.75 \times 10^{-10} \dots 1125$		
BPG	mbar / Torr	$5 \times 10^{-10} \dots 1000 / 3.75 \times 10^{-10} \dots 750$		
HPG	mbar / Torr	$2 \times 10^{-6} \dots 1000 / 1.5 \times 10^{-6} \dots 750$		
BAG	mbar / Torr	$2 \times 10^{-10} \dots 1 \times 10^{-1} / (1.5 \times 10^{-10} \dots 7.5 \times 10^{-2})$		
Measurement unit (selectable)		mbar, Torr, Pascal, micron		
Setpoints				
Setpoint relays	1	4	6	
Channel assignment	1	1 or 2	1/2 or 3	
Adjustment range		Sensor dependent adjustable		
Hysteresis		potential free change over contact		
Relay contact		potential free change over contact		
Contact rating	V AC / A V DC / A	30 / 2 60 / 1	30 / 1 60 / 0.5	
Connector		D-Sub, 9 pin, male	D-Sub, 25 pin, female	
Analog output		0 ... 10.3 Volt, sensor analog output signal		
Range				
Programmable analog output	—	1	1	
Connector	D-Sub, 9 pin, male	D-Sub, 9 pin, male	D-Sub, 9 pin, male	
Interface (digital)	RS 232 C	RS 232 C	RS 232 C	
Connector	D-Sub, 9 pin, female	D-Sub, 9 pin, female	D-Sub, 9 pin, female	
Power				
Supply	V	90 ... 250	90 ... 250	
Frequency	Hz	50 ... 60	50 ... 60	
Consumption	W	≤ 30	≤ 45	
Operation temperature (ambience) C		+5 ... +50		


¹⁾ down to 5×10^{-4} with parametermode "PRE" adjustable

Dimensions

VGC401

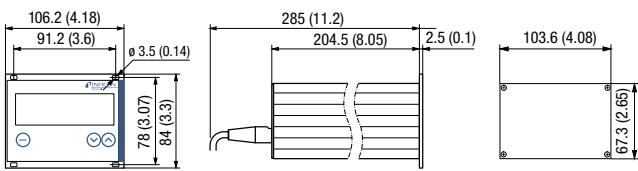

VGC402 / VGC403

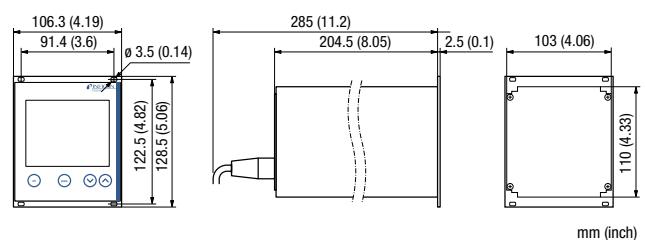

Pirani Gauge Display

PGD400

The INFICON Pirani Gauge Display PGD400 in combination with the INFICON Pirani Standard Gauge PSG5xx (only with FCC68 connector) is provides a cost effective pressure monitoring solution.

Advantages

- User selectable measurement unit (Pa, mbar or Torr)
- Compact bench top model design can be easily mounted in a panel or 19" rack
- 0 to 10 V output signal from the gauge is available for use in PLC or with a chart recorder
- One free adjustable set point
- Automatic gauge connection and filament detection
- CE / UL certified



Applications

- Fore vacuum pressure measurement
- Pressure measurement on filling stations for RAC and automotive applications
- Pressure measurement in light bulb production lines
- General vacuum measurement and control in the medium and rough vacuum range

Ordering Information

Type	PGD400
Pirani Gauge Display	398-800

Accessories

Sensor cable ¹⁾	1.3 m (4.27ft)	398-498
Seal with centering ring and filter	DN 16 ISO-KF	211-090
Adapter for rackmount 2HE / 3HE		398-499


¹⁾ Other lengths on request

PGD400 (continued)

Specifications

Measurement channels	1 (PSG5xx only)	
Display	LED	
Range	Pa	$5 \times 10^{-2} \dots 1 \times 10^5$
	mbar	$5 \times 10^{-4} \dots 1000$
Measurement rate	1/s	30
Measurement unit (selectable)	Pascal, mbar, Torr	
Setpoint		
Setpoint relay	1	
Adjustment range	$1 \times 10^{-3} \dots 500$	
Hysteresis	$\geq 10\%$ of measurement value	
Relay contact	floating changeover contact	
Contact rating	V AC / A	50 / 5
Connector	D-Sub, 9 pin, male	
Analog output	V	0 ... 10.3, sensor output signal
Power		
Supply	V AC	100 ... 240
Frequency	Hz	50 ... 60
Consumption	VA	≤ 30
Temperature		
Operation (ambiance)	°C	+5 ... +50
Storage	°C	-20 ... 60
Relative humidity	$\leq 80\%$ up to +31 °C decreasing to 50% at +40 °C	
Degree of protection	IP20	
Weight	kg	0.85

Dimensions

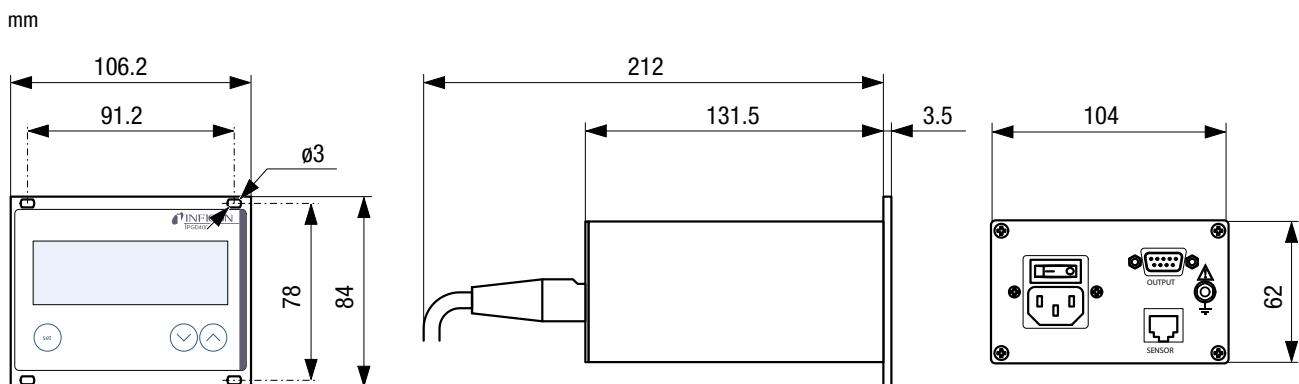

Vacuum Switch

VSA100A

The pressure switch VSA100A is used as a safety switch in vacuum systems. For example, to automatically interrupt the gas supply when venting vacuum systems with a purge gas at a pressure of 6 mbar below atmospheric pressure.

At a differential pressure of 6 mbar resp. return switching pressure of 3 mbar below atmospheric pressure, an elastic diaphragm actuates a changeover contact which in turn may be used to switch directly any ancillary equipment.

The electrical connections are protected by a plastic cover.



Advantages

- Reliable and budget-priced vacuum switch
- Long service life
- Rugged design
- Easy to integrate
- IP 44 protection
- Can be connected to a programmable control

Applications

- Control of load lock chambers
- Safety shutdown of vacuum systems

Ordering Information

Type	VSA100A
DN 16 ISO-KF, complete with 3 m (9.9 ft) cable	399-001


VSA100A – continued

Specifications

Switching pressure	mbar	6 ± 2 (below atmosphere)
Back switching	mbar	3 ± 2 (below atmosphere)
Operating pressure (absolute)	bar	<2
Helium permeation	mbar l/s	< 10^{-6}
Leak rate	mbar l/s	< 5×10^{-8}
Temperature		
Operation	°C	0 ... +85
Storage	°C	-20 ... +85
Switching contacts (gold plated)		Change over contact
Voltage max.	VDC/VAC	24/24
Current max.	mA	30 (24 VDC) / 100 (24 VAC)
Load min.	mA	1
Electrical connector		Cable, bare wire
Cable length, standard	m (ft)	3 (9.9)
Vacuum connection		DN 16 ISO-KF
Protective type		IP 44
Mounting orientation		vertical (standing)
Internal volume	cm ³ (inch ³)	2 (0.122)
Materials exposed to vacuum		Stainless steel 1.4305, EPDM, PTFE (Teflon)
Weight	g	315

Technical Note: Due to the diaphragm material used (EPDM), the Vacuum Switch VSA100A is not suited for applications in which the process gas contains large quantities of helium. The leak rate of the diaphragm for helium is < 10^{-6} mbar l/s.

Dimensions

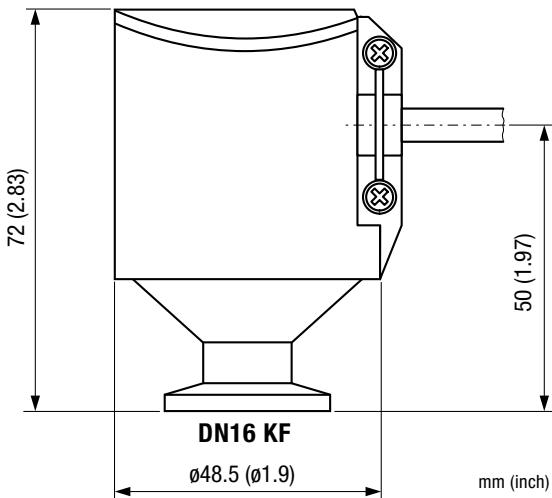

Vacuum Switch

VSA200, VSD200

INFICON Vacuum Switches are designed for accurate and reliable pressure detection. These robust electronic switches are used in all vacuum applications, including pressure interlock. The switches are available in two versions, absolute (references vacuum) or differential (references ambient).



Advantages

- Corrosion resistant all stainless steel design
- Relay output with potential free contacts
- Easy installation with setpoints factory preset or field-adjustable
- High-accuracy temperature compensated sensor
- Robust design, cleanroom compliant
- Pressure range 1×10^{-9} mbar ... 2 bar
- CE, RoHS

Applications

- Atmospheric pressure detection for all vacuum applications
- Pressure interlock (power supplies, gas supplies, pumps, valves, actuators, etc.)
- Vacuum to high vacuum

VSA200, VSD200 – continued**Ordering Information VSA200 absolute switch**

3 S A 1 – F 5 1 – 9 7 0 0

FS	Unit
1000	Torr
1100	mbar

Flange
DN 16 ISO-KF
4 VCR male
4 VCR female

Setpoint value		
0	0	0
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
9	9	9
C ¹⁾		

¹⁾ C = 10

Example: Setpoint at 970 Torr absolute pressure, DN 16 ISO-KF:
Setpoint at 1080 mbar absolute pressure, 4 VCR male:

3SA1-F51-9700
3SA1-G6C-C800

Ordering Information VSD200 differential switch

3 S D 1 – M 5 1 – B 2 0 0

Unit
Torr
mbar

Flange
DN 16 ISO-KF
4 VCR male
4 VCR female

Setpoint value	
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

Sign
A + (plus)
B – (minus)

Example: 20 Torr below ambient pressure, DN 16 ISO-KF: **3SD1-M51-B200**


VSA200, VSD200 – continued**Specifications**

		VSA200	VSD200
Full Scale (F.S.)	mbar (absolute) Torr (absolute)	– 1000	1100 –
Differential range ¹⁾	mbar Torr	– –	– –100 ... +50
Setpoint range	mbar Torr	30 ... 1060 –	–99 ... +46 –
Admissible pressure	bar (absolute)	5	2
Setpoint relay	Relay output Contact rating	V / A DC V / A AC	n.o., n.c., potential free 30 / 1 125 / 0.3
Setpoint accuracy	% F.S.	0.5	
Temperature effect on zero and span	% F.S. / °C	≤±0.02	
Response time	ms	≤45	
Hysteresis	% F.S.	2	
Electrical connection		D-Sub, 9-pin	
Supply voltage	V DC	14 ... 30	
Power consumption	W	<0.5	
Admissible temperature	Operation (ambient) Storage	°C °C	0 ... 70 –40 ... 80
Materials exposed to vacuum		stainless steel	
Mounting orientation		any	
Internal volume	DN 16 ISO-KF 4 VCR	cm ³ (inch ³) cm ³ (inch ³)	2.81 (0.17) 0.93 (0.057)
Weight	g	140	
Degree of protection		IP 40	
Sensor protection		Short circuit protection and reverse polarity protection	

¹⁾ References to ambient pressure.

VSA200, VSD200 - continued

Dimensions

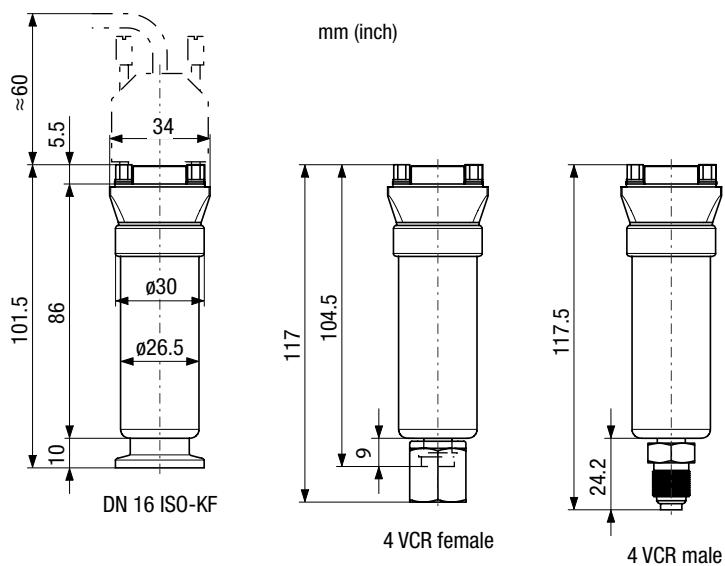

Accessories

Communication adapter (2 m) for PC USB port

¹⁾ Software to read or write data on Windows can be downloaded from our website.

Vacuum Switch

VSC150A

The INFICON Vacuum Switch VSC150 is an absolute pressure switch with an adjustable electrical switching contact from 0.5 to 2000 mbar. the mechanical design allows short therm overload of 3000 mbar without impairing the switching accuracy of ± 0.1 mbar. INFICON offers customer specific adjustment of pressure switch.



Advantages

- High switching accuracy (± 0.1 mbar)
- Stable long term operating characteristics
- Rugged, corrosion protected design
- Increased switching capability when using switching amplifier
- Switching contacts (normally closed) in the reference chamber and thus protected against process media
- Adapter available for differential pressure measurement

Applications

- Pressure switch or differential pressure switch to control valves, pumps, power supplies
- Load lock chambers
- Process chambers

Ordering Information

Type	VSC150A
DN 16 ISO-KF	399-005

Accessories

SV Switching Amplifier	399-008
Pressure Switch Adjustment	399-006
Differential Pressure Adapter	399-007

VSC150A – continued**Specifications**

VSC150A Vacuum Switch		
Switching range	mbar	0.5 ... 2000
Response sensitivity	mbar	0.1
Overload limit	mbar	3000
Switching hysteresis	mbar	0.5
Temperature		
Operation (ambient)	°C	5 ... 90
Storage	°C	-20 ... 70
Bakeout (max. 8 h)	°C	120
Coefficient of switch point	%/K of switching value	0.4
Vacuum connection		DN 16 ISO-KF
Electrical connection		Protected plug (DIN 43650)
Switch		n.c.
Switching voltage	V	24
Switching current	mA	10
Contact resistance	Ω	<1
Protection category		IP 65
Materials in contact with the medium		
Sensing volume		Stainless steel 1.4301, 1.4401, 1.4310, 1.3541, FPM75
Reference volume		Stainless steel 1.4301, 1.4401, 1.3541, glass, gold
Sensing volume ¹⁾	cm ³	≈4
Reference volume	cm ³	≈20
Weight	kg	1.3

¹⁾ Including connection port.


Specifications

SV Switching Amplifier		
Mains supply (selectable)	V	110 ... 130, 220 ... 240
Mains frequency	Hz	50 / 60
Power consumption	VA	3
Output relay		Change over contact
Switching voltage	V	250
Switching current	A	5
Switching capacity	VA	500
Response time	ms	30
Release time	ms	7
Control circuit	V / mA	24 / 10
Operation temperature	°C	5 ... 50
Weight	kg	0.36

VSC150A – continued


Dimensions

VSC150A Vacuum Switch

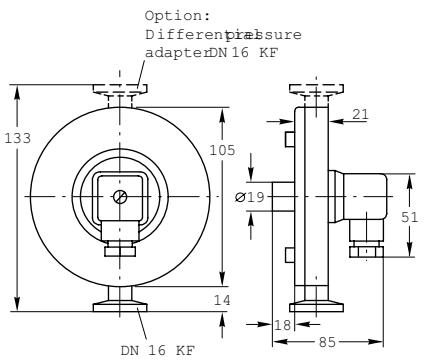

mm

SV Switching Amplifier

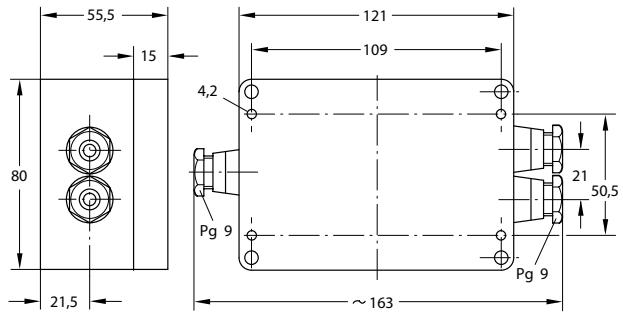

mm

Calibration Service

Vacuum Gauges

INFICON offers calibration services for vacuum gauges. DAkks (Deutsche Akkreditierungsstelle; according to DIN EN ISO/IEC 17025:2005) calibration certificate or factory calibration certificate can be issued.

All issued inspection documents are in compliance with the European Standard EN 10204

ADVANTAGES

- Known deviation to calibration standards
- Controlled quality over time

APPLICATIONS

- Reference to standard is required
- Reference for customer in house calibration service of vacuum gauges

DAkks CALIBRATION

The German Calibration Service (DAkks) ensures traceability of industrial measurements and testing to national calibration standards. It is run jointly by the Federal Institute for Physics and Technology (PTB), the Industry, the federal Minister for Economics and the Western European Metrology Club (WEMC).

The transfer standards employed in the DK calibration facility are checked regularly (recalibrated) by the PTB.

FACTORY CALIBRATION

Factory calibrations traced back to DAkks transfer standards.

CDG gauges are calibrated on a special tool with traceability to national standards at PTB.

Thus traceability to national standards is ensured in both cases.

OTHER CALIBRATIONS

NIST Calibration available upon request. Call for availability and pricing.

ORDERING INFORMATION

Calibration Service for	Calibration Range [mbar], [Torr]	DAkks Calibration ¹⁾	Factory Calibration ¹⁾
Pirani, Pirani Combination Gauges	1×10^{-3} ... 30	398-900	398-910
Capacitance Diaphragm Gauges	1×10^{-3} ... 1000	-	398-913
Capacitance Diaphragm Gauges (gauges with measurement cable to controller)	1×10^{-3} ... 1000	-	398-914
Bayard Alpert, Cold Cathode, High Pressure and Combination Gauges	1×10^{-6} ... 30	398-902	-
Bayard Alpert, Cold Cathode, High Pressure and Combination Gauges	5×10^{-7} ... 1000	-	398-912

¹⁾ Pressure media: Nitrogen

Inspection Documents Service

Vacuum Control

INFICON offers a inspection documents service for Vacuum Control products.
All issued inspection documents are in compliance with the European Standard EN 10204

Advantages

- Choice of three different inspection documents for customers individual needs
- Inspection documents according to European Standard EN 10204

Ordering Information

Designation of Inspection Document	Type	Ordering Number
Declaration of compliance with the order (Werksbescheinigung 2.1)	EN 10204-2.1	211-801
Test report (Werkszeugnis 2.2)	EN 10204-2.2	211-802
Inspection certificate (Abnahmeprüfzeugnis 3.1)	EN 10204-3.1	211-800

Please check with the given information in the following chart the right inspection document for your specific needs and order your choice of inspection document together with the corresponding Vacuum Control product you need it for.

The inspection document will be issued and delivered together with your goods and / or can be sent as pdf file for your attention.
For pricing or specific questions concerning inspection documents please call our customer service center.

Inspection Documents Service

inspection documents	EN 10204-2.1	EN 10204-2.2	EN 10204-3.1
Declaration of compliance with the order	Test report		Inspection certificate
Kind of inspection	<p>Non-specific inspection The products inspected are not necessarily the products actually supplied</p> <p>Manufacturer's declaration that the products supplied are in compliance with the requirements of the order, without inclusion of test results</p>	<p>Non-specific inspection The products inspected are not necessarily the products actually supplied</p> <p>Manufacturer's declaration that the products supplied are in compliance with the requirements of the order, with test results based on non-specific inspection</p>	<p>Specific inspection The products inspected are the products, or part of the products, actually supplied</p> <p>Manufacturer's declaration that the products supplied are in compliance with the requirements of the order, with test results based on specific inspection</p>
Contents of inspection document	In accordance with conditions of order	In accordance with conditions of order	According to regulations of authorities and the corresponding technical rules
Conditions of delivery	The manufacturer	The manufacturer	The manufacturer's authorized inspection representative, independent of the manufacturing department
Inspection document confirmed by			
Example for ordering at INFICON	Add ordering number 211-801 to your order in a separate order position directly after the order position of the corresponding parts you like to have the test report for	Add ordering number 211-802 to your order in a separate order position directly after the order position of the corresponding parts you like to have the test report for	Add ordering number 211-800 to your order in a separate order position directly after the order position of the corresponding parts you like to have the certificate for
Notes by INFICON	If this declaration is needed for all of your purchase order items you simply can add the ordering number 211-801 at the end of your order in the last position and state that it should be valid for the whole order	The test report just can be issued to a specific part number you have ordered. It can't be valid for multiple part numbers. It should be ordered along with the corresponding product it belongs to (add ordering number 211-802 directly after the product it belongs to)	This certificate just can be issued to a specific part number you have ordered. It can't be valid for multiple part numbers. It strictly has to be ordered along with the corresponding product it belongs to (add ordering number 211-800 directly after the product it belongs to)
Inspection document available for	All INFICON Vacuum Control products	All INFICON Vacuum Control products	<p>Majority of our vacuum fittings (usually this certificate is asked for fittings made of stainless steel and aluminium and their specific chemical composition)</p> <p>Other Vacuum Control products on request and according feasibility. Please define in your request values you like to have tested and confirmed</p> <p>Standard prices apply for this type of certificate, however we reserve the right to apply further charges for any additional work that maybe required</p>

Vacuum Feedthroughs

Vacuum Feedthroughs

Rotary Feedthroughs ISO-KF / ISO-K

FRH DN 16 - DN 63	B1
-------------------------	----

Rotary Feedthroughs CF

FRU DN 16 - DN 40	B3
-------------------------	----

Rotary/Linear Motion Feedthroughs ISO-KF

FCH DN 16 - DN 40	B5
-------------------------	----

Linear Motion Feedthroughs CF

FPU DN 16 - DN 40	B7
-------------------------	----

Electrical Feedthroughs

DN 16 ISO-KF.....	B9
-------------------	----

DN 40 ISO KF.....	B11
-------------------	-----

DN 16 CF	B13
----------------	-----

DN 40 CF	B15
----------------	-----

DN 40 ISO KF.....	B17
-------------------	-----

Coaxial Feedthroughs ISO-KF / CF-F

BNC / MHV DN 16 - 40	B19
----------------------------	-----

Vacuum Feedthroughs

METAL-CERAMIC CONNECTIONS	B21
---------------------------------	-----

Liquid Feedthroughs ISO-KF / CF-F

DN 40	B23
-------------	-----

Viewports

DN 25 - DN 50 ISO-KF.....	B25
---------------------------	-----

DN 63 - DN 160 ISO-K.....	B27
---------------------------	-----

DN 16 - DN 160 CF	B29
-------------------------	-----

DN 63 - DN 160 ISO-F.....	B31
---------------------------	-----

Vacuum Feedthroughs

VACUUM BALL BEARINGS	B33
----------------------------	-----

LUBRICANTS AND SEALING MATERIALS	B35
----------------------------------------	-----

Inspection Documents Service

Vacuum Control	A87
----------------------	-----

Website

Rotary Feedthroughs ISO-KF / ISO-K

FRH DN 16 – DN 63

Properties

- For transmitting high torque
- With FPM shaft seal and ball bearings



Selection Data

Vacuum connection	DN 16 ISO-KF	DN 25 ISO-KF	DN 40 ISO-KF	DN 63 ISO-K
Feedthrough/seal	FPM	FPM	FPM	FPM
Shaft measure	mm	Ø5	Ø8	Ø12

Ordering Information





Type	FRH016-H	FRH025-H	FRH040-H	FRH063-H
Part No.	214-300	214-302	214-304	214-306 ²⁾

Specifications

Transferable torque	Nm	1.5	6	25	100
Rotational speed ¹⁾	rpm	1500	1000	750	500
Idling torque under vacuum	Ncm	≤ 3	≤ 4	≤ 5	≤ 10
Starting torque under vacuum	Ncm	≤ 6	≤ 8	≤ 10	≤ 20
Shaft load vacuum sided					
Radial force	N	60	150	250	500
Axial force	N	30	50	60	100
Service life	Revolutions	20 000 000	20 000 000	20 000 000	10 000 000
Tightness, static	mbar l/s	1 x 10 ⁻⁹	1 x 10 ⁻⁹	1 x 10 ⁻⁹	1 x 10 ⁻⁹
Pressure (absolute)			1 x 10 ⁻⁹ mbar ... 1 bar		
Operating temperature	°C			50	
Bakeout temperature	°C			110	
Materials exposed to process media				stainless steel 420/1.4021 aluminum 6063/3.2315 elastomer FPM	
Weight	kg	0.1	0.2	0.6	2

¹⁾ When a reduced service life is acceptable, the rotation can be increased by up to a factor of two

²⁾ Centering ring / CR/aluminum Part No. 212-251 / FPM / stainless steel Part No. 212-281 not included in delivery

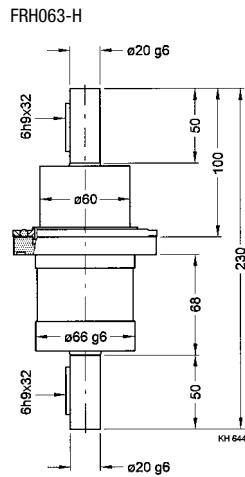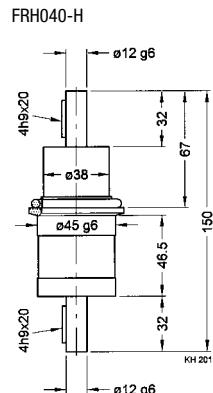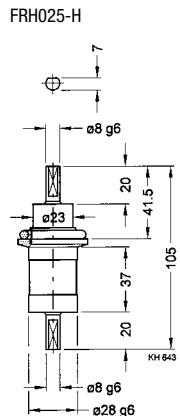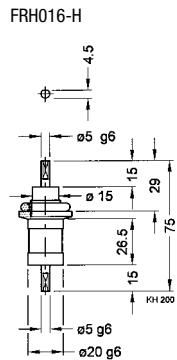FRH DN 16 – DN 63 – continued**Dimensions**

Rotary Feedthroughs CF

FRU DN 16 – DN 40

Properties

- Bellow sealed
- All-metal version
- For very demanding vacuum requirements



Selection Data

Vacuum connection	DN 16 CF-F	DN 40 CF-F	DN 40 CF-F
Feedthrough / seal	bellow	bellow	bellow
Shaft connection	mm	4	8

Ordering Information


Type	FRU016-H	FRU040-N	FRU040-L
Part No.	214-310	214-312	214-314

Specifications

Transferable torque			
Dynamic	Nm	0.4	4
Dynamic, at 300°C	Nm	0.2	2
Static	Nm	0.2	3
Rotational speed	rpm	200	1000
At max. torque	rpm		500
Shaft load vacuum sided			
Radial force	N	10	60
Axial force	N	5	20
Service life	Revolutions	1 000 000	2 000 000
Scale division	Degree	10	–
Tightness	mbar l/s		5×10^{-11}
Pressure (absolute)			1×10^{-10} mbar ... 2 bar
Operating temperature	°C		300
Bakeout temperature	°C		300
Materials exposed to process media		304L/1.4306 304/1.4301 –/2.4360	304L/1.4306 304/1.4301 –/2.4360
Weight	kg	0.3	1.5
			3.0

FRU DN 16 – DN 40 – continued

Dimensions

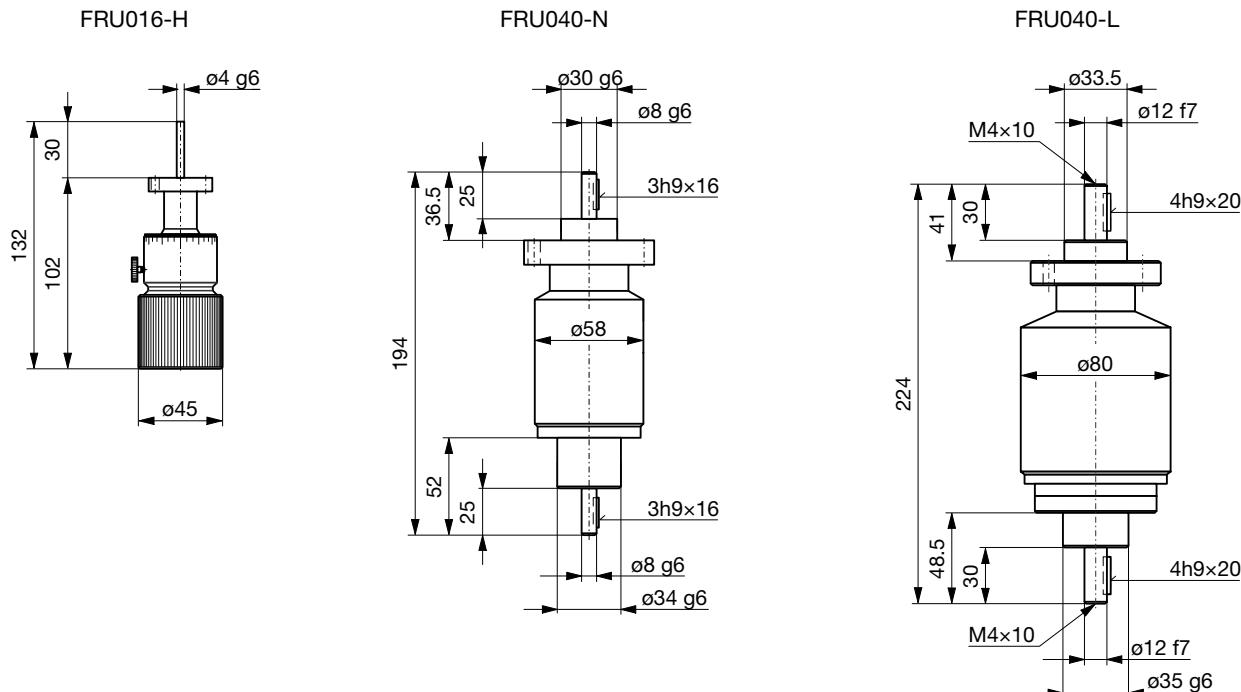

Rotary/Linear Motion Feedthroughs ISO-KF

FCH DN 16 – DN 40



Properties

- Two FPM shaft seals
- Direct push/pull and rotary actuation
- With locking ring and optional anti-rotation device

Selection Data

Vacuum connection	DN 16 ISO-KF	DN 25 ISO-KF	DN 40 ISO-KF
Feedthrough/seal	FPM	FPM	FPM
Shaft connection	M 3 / Ø 5mm	M 4 / Ø 8mm	M 6 / Ø 12mm
Travel	mm	50	100
			150

Ordering Information


Type		FCH016-H	FCH025-H	FCH040-H
Rotary/linear feedthrough	Part No.	214-320	214-322	214-324
Anti-rotation device	Part No.	214-072	214-073	214-074

Specifications


Shaft load				
Radial force at max.travel	N	10	15	30
Torsion torque	Nm	2	8	20
Tightness, static	mbar l/s		1 x 10 ⁻⁹	
Pressure (absolute)			1 x 10 ⁻⁸ mbar ... 1 bar	
Operating temperature	°C		50	
Bakeout temperature	°C		110	
Materials exposed to process media			stainless steel 304/1.4301 aluminum 6063/3.2315	
Weight	kg	0.1	0.2	0.3

FCH DN 16 – DN 40 – continued


Dimensions

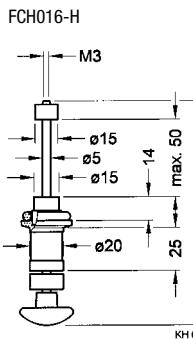


Feedthrough

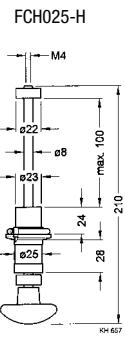


Feedthrough

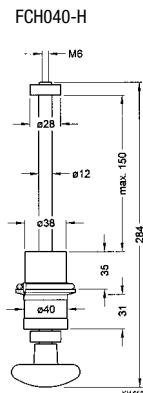


Feedthrough



Anti-rotation device



Anti-rotation device

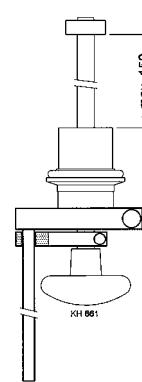

Anti-rotation device

Linear Motion Feedthroughs CF

FPU DN 16 – DN 40

Properties

- With bellows for more demanding vacuum requirements
- Direct push and pull actuation
- High accuracy adjustment using micrometer screw



Selection Data

Vacuum connection	DN 16 CF-R	DN 40 CF-R	DN 16 CF-R	DN 40 CF-R
Feedthrough/seal	bellow	bellow	bellow	bellow
Shaft connection	M4x16 mm	M6x10 mm, Ø10 mm	M4x16 mm	M6x10mm, Ø10 mm
Actuator	manual	manual	micrometer screw	micrometer screw
Travel	mm	25	50	20
				50

Ordering Information

Type	FPU016-H	FPU040-H	FPU016-Z	FPU040-Z
Part No.	214-330	214-332	214-334	214-336


Specifications

Travel per revolution	mm		0.5	1
Scale division	mm	5	0.01	0.005
Shaft load				
Radial force at max.	N	20	100	20
Axial force vacuum	N	85	140	185
Axial force against atm	N	100	200	200
Torsion torque	Nm	0.2	0.5	0.2
Tightness	mbar l/s		5 x 10 ⁻¹¹	
Pressure (absolute)			1 x 10 ⁻¹⁰ mbar ... 2 bar	
Bakeout temperature				
Feedthrough	°C	300	300	300
Micrometer screw	°C		100	100
Materials exposed to process media			stainless steel 304L/1.4301 stainless steel 316Ti/1.4571	
Weight	kg	0.15	0.75	0.25
				1


FPU DN 16 – DN 40 – continued

Dimensions


FPU016-H




FPU040-H

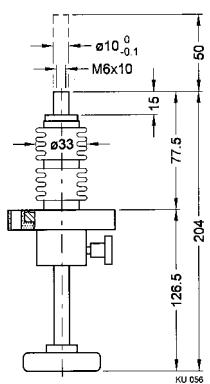

FPU016-Z

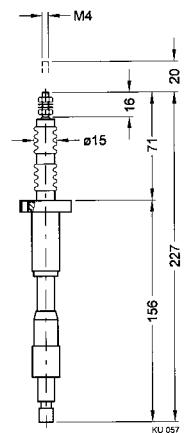

FPU040-Z

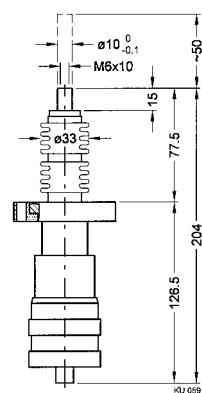

Electrical Feedthroughs

DN 16 ISO-KF



Selection Data

Vacuum connection	DN 16 ISO-KF	DN 16 ISO-KF	DN 16 ISO-KF
Number of feedthroughs	4	9	9
Voltage per pole	V 50	50	50
Current per pole	A 1	2	2

Ordering Information

Feedthrough	214-111	214-112	214-113
Connector: vacuum side	—	—	214-191
Connector: atmospheric side	214-171	214-172	214-172


Specifications

Connection			
Vacuum side	solder connection	solder connection	connector
Atmospheric side	connector	connector	connector
Diameter of connecting wire	mm	0.6	1.2
Tightness	mbar l/s		1×10^{-9}
Pressure (absolute)		1×10^{-8} mbar ... 2.5 bar	
Bakeout temperature (feedthrough and connector)	°C	130	
Housing		stainless steel 303/1.4305	
Insulator		PEEK / Araldite	
Seal		FPM	
Contacts (feedthrough and connector)		gold-plated bronze	

DN 16 ISO-KF – continued


Dimensions

214-111




Feedthrough

214-112




Feedthrough

214-113




Feedthrough


214-191

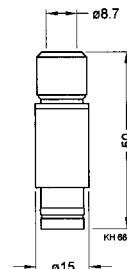Connector:
vacuum side


214-171



214-172

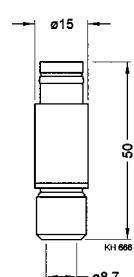

214-172

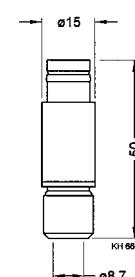Connector:
air side

Electrical Feedthroughs

DN 40 ISO KF



Selection Data

Vacuum connection	DN 40 ISO - KF			
Number of feedthroughs	7	7	4	1
Voltage per pole	V 380	380	800	6000
Current per pole	A 16	16	16	25

Ordering Information











Feedthrough	214-121	214-122	214-123	214-131
Connector: vacuum side	–	214-193	214-194	–
Connector: atmospheric	214-174	214-174	214-175	214-180

Specifications

Connection				
Vacuum side	solder connection	connector	connector	bolted connection
Atmospheric side	connector	connector	connector	connector
Diameter of connecting wire	mm	1.8	1.8	2.5
Test voltage	kV/HZ	–	–	–
Pressure (absolute)			1 x 10 ⁻⁸ mbar ... 2.5bar	
Bakeout temperature (feedthrough and connector)	°C		130	
Housing			stainless steel 303/1.4305	
Insulator			PTFE/Araldite	
Seal			FPM	
Contact (feedthrough and connector)	gold-plated bronze	gold-plated bronze	gold-plated bronze	nickel-plated brass

DN 40 ISO KF – continued

Dimensions

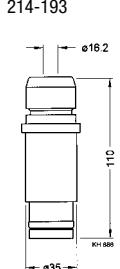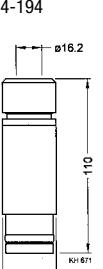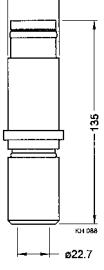 <p>214-193 Connector: vacuum side</p>	 <p>214-194 Connector: vacuum side</p>		
 <p>214-121 Feedthrough</p>	 <p>214-122 Feedthrough</p>	 <p>214-123 Feedthrough</p>	 <p>214-131 Feedthrough</p>
 <p>214-174 Connector: air side</p>	 <p>214-174 Connector: air side</p>	 <p>214-175 Connector: air side</p>	 <p>214-180 Connector: air side</p>

Electrical Feedthroughs

DN 16 CF



Selection Data

Vacuum connection	DN 16 CF-F
Number of feedthroughs	1
Voltage per pole	0.3 kV
Current per pole	120 A

Ordering Information

Feedthrough	214-126
Connection piece: vacuum side	214-195
Connector: atmospheric side	214-176


Specifications

Bakeout temperature	°C	400
Tightness	mbar l/s	5 x 10 ⁻¹¹
Pressure (absolute)		1 x 10 ⁻¹⁰ mbar ... 2 bar
Flange		stainless steel 304/1.4301
Conductor		OF-copper 2.0040
Insulator		aluminum oxide ceramic Al ₂ O ₃
Weight		0.15
Connection piece: vacuum side		2
Current max.		100
Bakeout temperature	°C	400
Material		stainless steel 304/1.4301
Connector: atmospheric side	Pieces	2
Current max.	A	100
Insulated, for use up to	VAC/VDC	not insulated
Bakeout temperature	°C	150
Contact		silver-plated brass


DN 16 CF - continued

Dimensions


214-195



214-126



214-176



Electrical Feedthroughs

DN 40 CF



Selection Data

Vacuum connection	DN 40 CF-F	DN 40 CF-F	DN 40 CF-F	DN 40 CF-F	DN 40 CF-F
Number of feedthroughs	1	1	2	4	9
Voltage per pole	kV	0.3	1	0.3	1
Current per pole	A	70	200/1000 ¹⁾	70	8

1) With water-cooling

Ordering Information
















Feedthrough	214-136	214-127	214-128	214-116	214-117
Connection piece: vacuum side	214-195	214-196	214-195	214-192	214-198
Connector: atmospheric side	214-176	214-177	214-176	214-173	214-181
Connector: atm. side, H ₂ O cooled	-	214-178	-	-	-

Specifications

Bakeout temperature	°C	400			
Tightness	mbar l/s	5 x 10 ⁻¹¹			
Pressure (absolute)		1 x 10 ⁻¹⁰ mbar ... 2 bar			
Flange	304/1.4301	304/1.4301	304/1.4301	304/1.4301	304/1.4301
Conductor	OFC 2.0040	OFC 2.0040	OFC 2.0040	304/1.4301	304/1.4301
Insulator	Al ₂ O ₃	Al ₂ O ₃	Al ₂ O ₃	Al ₂ O ₃	Al ₂ O ₃
Weight	0.15	0.5	0.45	0.3	0.5
Connection piece: vacuum side	2	1	2	5	10
Current	A	20	1000 ¹⁾	100	12
Bakeout temperature	°C	400	400	400	400
Material		304/1.4301	2.0061	304/1.4301	304/1.4301
Connector: atmospheric side	Pieces	2	1	5	10
Current max.	A	100	250	100	25
Insulated, for use up to	VAC/VDC	not insulated	30/60	30/60	30/60
Bakeout temperature	°C	150	150	50	50
Contact		silver-plated brass	silver-plated brass	silver-plated brass	gold-plated brass

DN 40 CF - continued

Dimensions

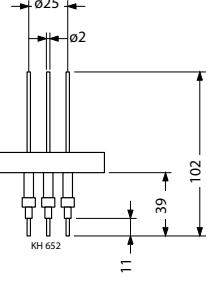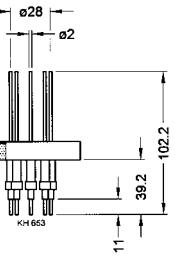214-195 	214-196 	214-195 	214-192 	214-198 
Connector vacuum side	Connector vacuum side	Connector vacuum side	Connector vacuum side	Connector vacuum side
214-136 	214-127 	214-128 	214-116 	214-117 
Feedthrough	Feedthrough	Feedthrough	Feedthrough	Feedthrough
214-176 	214-177 	214-176 	214-173 	214-181 
Connector air side	Connector air side	Connector air side	Connector air side With soldered joint	Connector air side With soldered joint
With water-proof ¹⁾ Current max. A 1000 Not insulated, for use up to 24 Bakeout temperature °C 120 Contact silver-plated brass				

High Current Feedthrough

DN 40 ISO KF

Properties

- ◆ Selection of three electrodes
- ◆ Slide into mounted feedthrough
- ◆ Current connection with water cooling



Selection Data

Vacuum connection	DN 40 ISO-KF
Number of feedthroughs	1
Voltage	100
Current	250/1500 ¹⁾

¹⁾ With water cooling

Ordering Information

Feedthrough with O-ring KF40	214-141
Current connection with water cooling ²⁾	214-145
Straight electrode	214-142
Angle electrode	214-143

²⁾ Not insulated


Specifications

Tightness	mbar l/s	1 x 10 ⁻⁹
Pressure (absolute)		1 x 10 ⁻⁸ mbar ... 2.5 bar (max. 10 bar with external centering ring)
Bakeout temperature	°C	110
Housing		aluminum 6063/3.2315
Insulator		thermoplast and thermoset
Seal		FPM

DN 40 ISO KF – continued


Dimensions

214-141




Feedthrough

214-145




Current connection
with water cooling
copper/brass

214-142

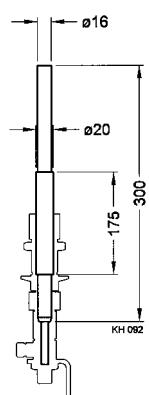

Electrodes copper/brass

214-143

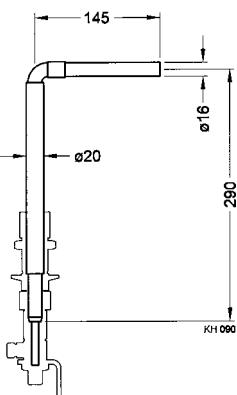

Electrodes copper/brass

Coaxial Feedthroughs ISO-KF / CF-F

BNC / MHV DN 16 – 40

Properties

- Based on MIL-C-39012A
- Voltage up to 5 kV DC
- With atmospheric connector



Selection Data

Vacuum connection	DN 16 ISO-KF	DN 16 ISO-KF	DN 16 CF-F	DN 16 CF-F	DN 40 CF-F
Number of feedthroughs	1	1	1	1	3

Ordering Information

Type	BNC	MHV	BNC	MHV	MHV
Part No.	214-151	214-152	214-155	214-156	214-157

Specifications


Voltage					
AC, 50 Hz	kV	0.35	3.5	0.35	3.5
DC	kV	0.5	5	0.5	5
Current	A	3	3	3	3
Frequency	MHz	150		150	
Impedance	Ω	50-60		50-60	
Insulation resistance at 20°C	Ω	10^{10}	10^{10}	10^{10}	10^{10}
Tightness	mbar l/s	1×10^{-9}	1×10^{-9}	1×10^{-10}	1×10^{-10}
Pressure (absolute) ¹⁾		1×10^{-8} mbar to 2.5 bar	1×10^{-8} mbar to 2.5 bar	1×10^{-10} mbar to 10 bar	1×10^{-10} mbar to 10 bar
Housing, flange, conductor		stainless steel	stainless steel	stainless steel	stainless steel
Feedthrough, seal		Al_2O_3	Al_2O_3	Al_2O_3	Al_2O_3
Bakeout temperature					
With connector	°C	50	50	50	50
Without connector	°C	200	200	400	400
Standard connection					
Atmospheric connector		UG 88/U	UG 932/U	UG 88/U	UG 932/U
Cable		RG 58/U	RG 59/U	RB 58/U	RG 59/U
Weight	kg	0.1	0.1	0.14	0.5

¹⁾ Pressure at 400°C : 2 bar


BNC / MHV DN 16 – 40 – continued

Dimensions


214-151




214-152





214-155



214-156



214-157



Vacuum Feedthroughs

METAL-CERAMIC CONNECTIONS

Properties

- High grade materials allow repeated bakings up to 400°C



Selection Data

Voltage ¹⁾	3 kV	2 kV	5 kV	10 kV
-----------------------	------	------	------	-------

Ordering Information

Part No.	214-161	214-162	214-163	214-164
----------	---------	---------	---------	---------

Specifications


Insulator Connection	Al ₂ O ₃			
a	Fe-Ni	Fe-Ni	Fe-Ni	Fe-Ni
b	Fe-Ni	stainless steel 304/1.4301	stainless steel 304/1.4301	stainless steel 304/1.4301
Bakeout temperature	°C	400	400	400
Tightness	mbar l/s	5 x 10 ⁻¹¹	5 x 10 ⁻¹¹	5 x 10 ⁻¹¹
Weight	g	5	12	25
				90

¹⁾ Based on VDE 0110 for air and surface-leakage in atmosphere on both sides.

Higher values up to factor two are admissible in pressures <10⁻⁴ mbar.

METAL-CERAMIC CONNECTIONS - continued

Dimensions

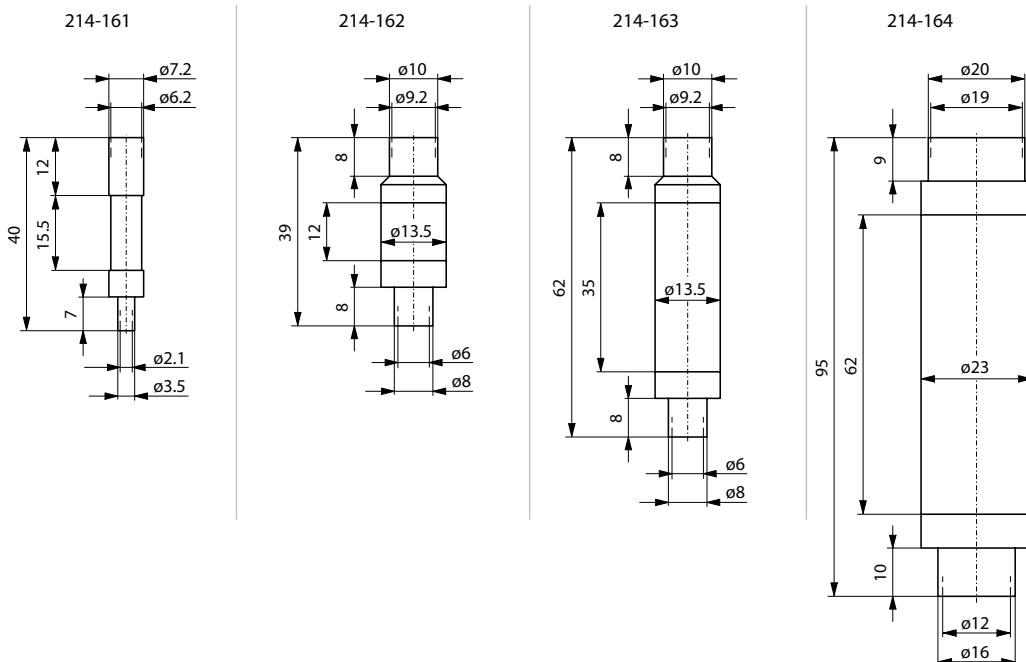

Liquid Feedthroughs ISO-KF / CF-F

DN 40

Properties

- For H₂O and LN₂
- Thermically insulated
- Specially suited for very hot and very cold applications



Selection Data

Vacuum connection	DN 40 ISO-KF	DN 40 CF-F
Feedthrough/seal	welded	welded
Tube dimensions	mm	Ø 8 x 1
Number of tubes		2

Ordering Information


Part No.	214-101	214-102

Specifications

Tightness	mbar l/s	1 x 10 ⁻⁹	1 x 10 ⁻¹⁰
Pressure		10 ⁻⁸ mbar ... 10 bar	10 ⁻⁹ mbar ... 10 bar
Temperature range	°C	-200 ... +150	-200 ... +400
Material		stainless steel 304/1.4301	stainless steel 304/1.4301
Weight	kg	0.3	0.4


DN 40 - continued

Dimensions

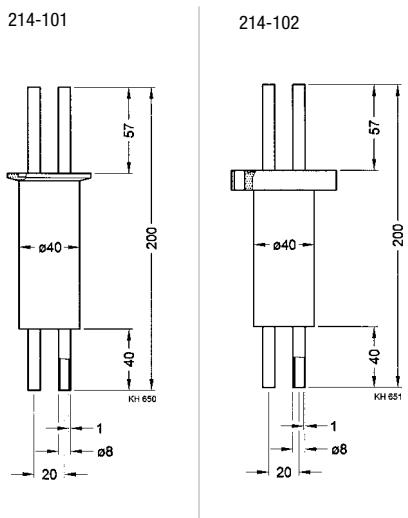

Viewports

DN 25 – DN 50 ISO-KF

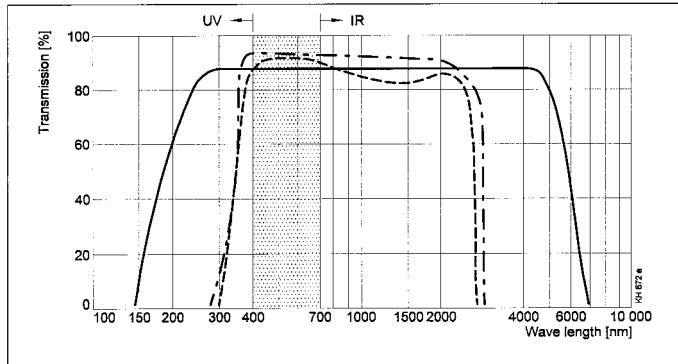

Average transmittance curve
 — Sapphire
 - - - Kodial
 - - - Borosilicate



Properties

- Wide viewing angle

Selection Data

Vacuum connection	DN 25 ISO-KF	DN 40 ISO-KF	DN 50 ISO-KF
Window		borosilicate glass	
Seal		FPM	
Flange		aluminum 6082/3.2315	
Bakeout temperature	°C	150	

Ordering Information

Part No.	214-003	214-004	214-005


Specifications

Tightness	mbar l/s	1 x 10 ⁻⁹
Pressure (absolute)		1 x 10 ⁻⁸ mbar ... 4 bar
Max. at 150°C	bar	3
Window thickness	mm	3.8
Weight	g	20 30 40


DN 25 – DN 50 ISO-KF – continued

Dimensions


214-003



214-004





214-005




Mounting

Claws, screws and clamping ring not included



Viewports

DN 63 – DN 160 ISO-K

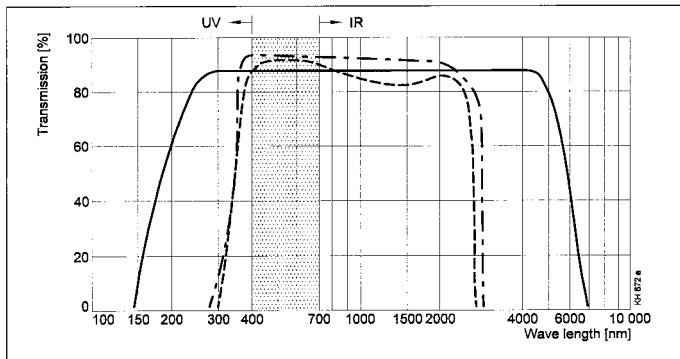

Properties

- Wide viewing angle

Selection Data

Vacuum connection	DN 63 ISO-K	DN 100 ISO-K	DN 160 ISO-K
Window		borosilicate glass	
Seal		FPM	
Flange		aluminum 6082/3.2315	
Bakeout temperature	°C	150	

Ordering Information

Part No.	214-006	214-007	214-008

Specifications


Tightness	mbar l/s	1 x 10 ⁻⁹
Pressure (absolute)		1 x 10 ⁻⁸ mbar ... 2 bar
Max. at 150°C	bar	1
Window thickness	mm	6
Weight	kg	0.2
		8
		10
		0.3
		0.4

¹⁾ Claws not included


DN 63 – DN 160 ISO-K – continued

Dimensions



214-006



214-007

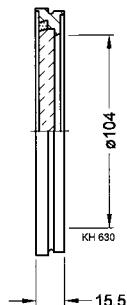


214-008

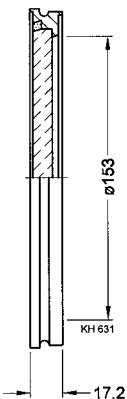**Mounting**

Viewports

DN 16 – DN 160 CF

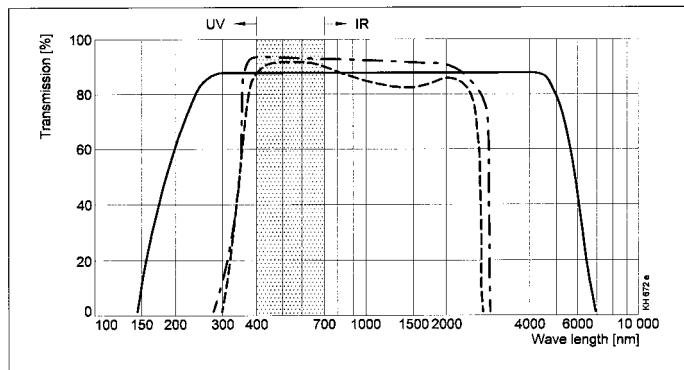

Average transmittance curve

- Sapphire
- · - Kodial
- - - Borosilicate



Properties

- Protection window
- With Fe-Ni alloy as transition material

Selection Data

Vacuum connection	DN 16 CF-F	DN 40 CF-F	DN 40 CF-F	DN 63 CF-F	DN 100 CF-F	DN 160 CF-F
Window	kodial glass	kodial glass	sapphire glass	kodial glass	kodial glass	kodial glass
Seal			iron/nickel			
Flange			stainless steel 304/1.4301			
Bakeout temperature	°C			400		

Ordering Information


Viewport	214-021	214-022	214-032	214-023	214-024	214-025
Bolt set	213-416	standard	standard	standard	standard	standard

Specifications


Tightness	mbar l/s	5 x 10 ⁻¹¹					
Pressure (absolute)							
Min.	mbar	1 x 10 ⁻¹⁰					
Max.	bar	2					
Max. at 400°C	bar	1					
Window thickness	mm	1.5	3	3	3.5	6	8
Weight	kg	0.04	0.24	0.35	0.85	1.4	2.8

DN 16 – DN 160 CF – continued

Dimensions

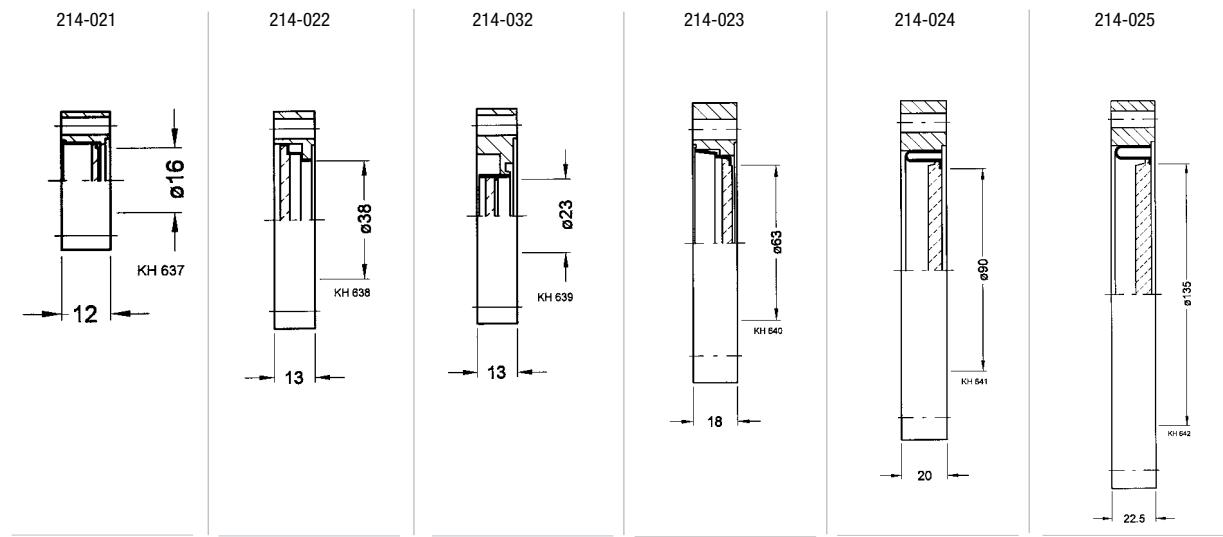


Mounting



Viewports

DN 63 – DN 160 ISO-F

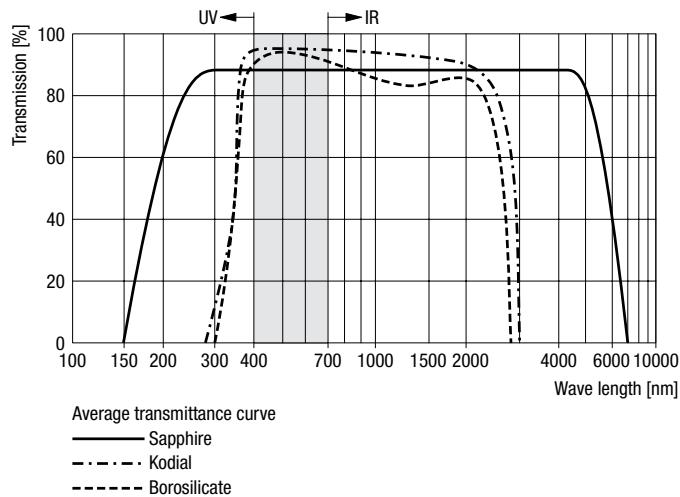

Properties

- Wide viewing angle

Selection Data

Vacuum connection	DN 63 ISO-F	DN 100 ISO-F	DN 160 ISO-F
Window		borosilicate glass	
Seal		FPM	
Flange		black anodized aluminum 6063/3.2315	
Centering ring		aluminum 6063/3.2315	
Snap ring		stainless steel 304/1.4301	
Bakeout temperature	°C	150	

Ordering Information

Viewport ¹⁾	Part No.	214-016	214-017	214-018
Protective glass, 5 pcs.	Part No.	214-046	214-047	214-048


¹⁾ Claws, bolts, nuts and washer included

Specifications

Tightness	mbar l/s	1×10^{-9}	
Pressure (absolute)		1×10^{-8} mbar ... 2 bar	
Max. at 150°C	bar	1	
Window thickness	mm	7.5	11
Protective glass thickness	mm	2.5	2.5
Weight	kg	0.8	1.4
		3	

DN 63 – DN 160 ISO-F – continued

Dimensions

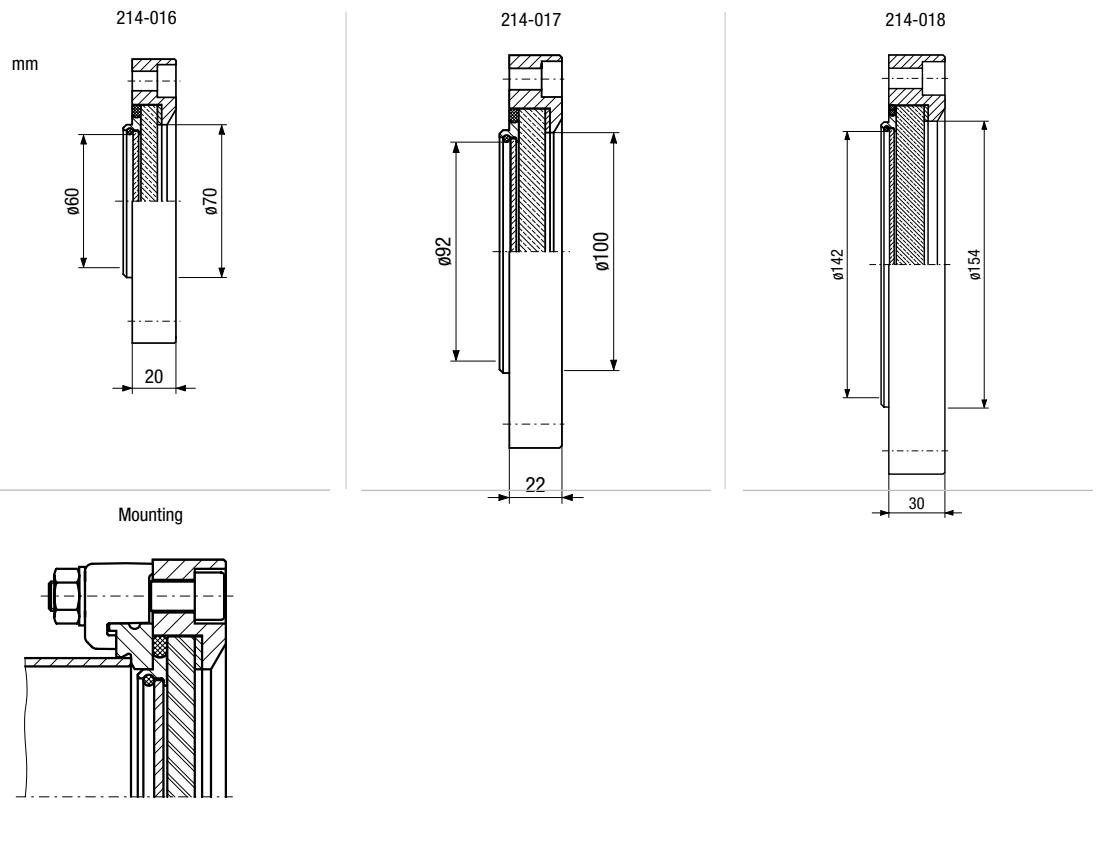

Vacuum Feedthroughs

Vacuum Ball Bearings

Properties

- Especially suited for clean vacuum applications and extreme residual gas requirements
- With shields (non-rubbing seals)
- With dry lubrication
- Bearing clearance



Selection Data

Service life ¹⁾ (revolutions)		> 20 Mio.	
Pressure (absolute)	mbar	$1 \times 10^{-12} \dots 1 \times 10^{-2}$	
Operating temperature ²⁾	°C	-200 ... +300	
Material			
Inner ring, outer ring, balls	AISI/DIN	stainless steel – /1.4037	
Cage	AISI/DIN	stainless steel 430 / 1.4016	
Coating (dry lubrication)		Wolfratherm®	
Inner ring, outer ring, cage			

¹⁾ At half load and >1000 rpm

²⁾ At -200°C reduction of tenacity

Ordering Information

Type	624	605	626	608	6000	6001
Part No.	214-211	214-212	214-213	214-214	214-215	214-216


Specifications

Rotational speed at						
20°C	rpm	5000	4000	3000	2500	2000
300°C	rpm	1500	1500	1000	800	500
Load capacity ¹⁾						
Static load rating (Co)	N	400	400	800	1000	1500
Dynamic load rating (C)	N	50	50	100	150	200
Axial load		<<C	<<C	<<C	<<C	<<C
Fit according to ISO		G6 / f6				
Weight	g	3	4	8	13	20

¹⁾ At 20°C; half value at 300 °C

VACUUM BALL BEARINGS - continued

Dimensions

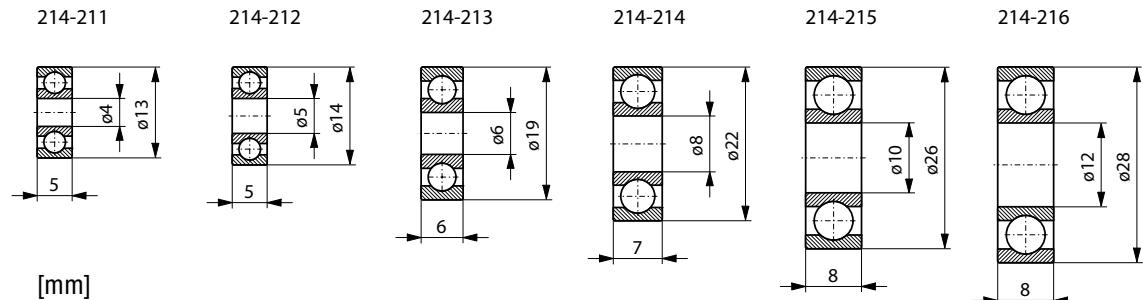

Vacuum Feedthroughs

LUBRICANTS AND SEALING MATERIALS



High Temperature Lubricant

- Prevents seizing of stainless steel screw connections at atmosphere even at high temperatures
- Remains fully effective for at least 10 bakeout cycles

Selection Data

Temperature resistance	1000°C
In packages of	28 g

Ordering Information

Type	C 100
Part No.	214-231

Sealing Material

- For sealing small leaks

Selection Data

Temperature resistance	°C	-40 - 200	350
Version		Paste	Spray
In packages of	g	100	170

Ordering Information

Type	Rhodosil 340	Sprayseal
Part No.	214-233	214-234

LUBRICANTS AND SEALING MATERIALS - continued

Vacuum Grease/Oil

- For sliding elastomer seals
- Low vapor pressure
- Good adhesiveness

Selection Data

Temperature resistance	°C	10 - 30	-40 - 200	-20 - 200	-60 - 300	-60 - 300
Vapor pressure at 20°C	mbar	<10 ⁻⁸	<5 x 10 ⁻⁷	< 10 ⁻¹²	< 10 ⁻¹²	< 10 ⁻¹²
100°C	mbar		<7 x 10 ⁻⁶	< 10 ⁻⁷	< 10 ⁻⁷	< 10 ⁻⁷
In packages of Material		25 g mineral grease	50 g silicon grease	10 g fluorinated grease	30 g fluorinated grease	10 ml fluorinated oil with MoS ₂

Ordering Information

Type	Apezon M	Dow Corning	FU 090	FM 090	OL 090
Part No.	214-236	214-237	214-238	214-239	214-240

Characteristics

Lubricity	very good	good	good	good/very good	good
Resistance to Oxidation Chemicals Thermal decomposition		very good good very good	very good very good good	very good very good good	very good very good good



Vacuum Fittings

High- & Ultra-High Vacuum Components

VACUUM FITTINGS

ISO-KF Small Flange Components

Connection Elements	C1
Seals	C4
Flanges	C11
Pipe Fittings	C13
Bellows / Hose with Flanges	C16
Transition Pieces	C18
Hose, Hose Connection	C22

ISO-K Clamp Flange Components

Connection Elements	C25
Seals	C27
Flanges	C30
Pipe Fittings	C32
Bellows / Hose with Flanges	C35
Transition Pieces	C36
Protective Lids	C38

ISO-F Fixed Flange Components

Flange Components	C39
-------------------------	-----

UHV CF Components

Connection Elements	C42
Seals	C44
Flanges	C46
Pipe Fittings	C51
Bellows / Hose with Flanges, Compensator	C54
Transition Pieces	C55
Protective Lids	C56

Inspection Documents Service

Vacuum Control	A87
----------------------	-----


Website

ISO-KF Small Flange Components

CONNECTION ELEMENTS


Clamping Ring Wing Nut

	DN ... ISO-KF	Part No.	A	B	C
Clamping ring half: aluminum 380.0/3.2162	10 – 16	211-001	45	61	16
Bolt: steel nickel plated	20 – 25	211-002	55	72	16
Nut: zinc alloy nickel plated	32 – 40	211-003	70	90	18
	50	211-004	95	123	25



Clamping Ring Hex Nut

	DN ... ISO-KF	Part No.	A	B	C
Clamping ring half: aluminum 380.0/3.2162	10 – 16	211-611	45	61	16
Bolt & nut: steel nickel plated	20 – 25	211-612	55	72	16
	32 – 40	211-613	70	90	18
	50	211-614	95	123	25




CONNECTION ELEMENTS - continued

Rapid Fastening Clamp

		DN ... ISO-KF	Part No.	A	B	C
Spring:	steel	10 – 16	211-005	52	70	16
Clamping ring half:	aluminum 380.0/3.2162	20 – 25	211-006	61	81	16
Lever:	polyamide	32 – 40	211-007	75	98	18


Temperature ≤80°C



Rapid Fastening Clamp All Metal

		DN ... ISO-KF	Part No.	A	B	C
Spring:	stainless steel	10 – 16	211-036	53	71	16
Clamping ring half:	aluminum 380.0/3.2162	20 – 25	211-037	61	72	16
Lever:	aluminum -/3.2982	32 – 40	211-038	78	99	18

Temperature ≤150°C




Chain Clamp

		DN ... ISO-KF	Part No.	A	B	C	D*
Chain link:	aluminum 6081/3.2215	10 – 16	211-021	71	52.5	18	2.5 Nm
Screw & nut & bolts:	stainless steel	20 – 25	211-022	82	65	18	3.5 Nm
		32 – 40	211-023	98	79	18	5 Nm
		50	211-024	117	97.5	20	6 Nm

Elastomer seals only


* Max. tightening torque



CONNECTION ELEMENTS - continued


Clamping Element

	DN ... ISO-KF	Part No.	A	C
Clamping Element: aluminum 380.0/3.2162	10 – 16	211-008	52	18
Bolt: stainless steel	20 – 25	211-009	75	20
Nut: steel zinc plated	32 – 40	211-010	90	23
	50	211-011	115	28




Hose Clip Clamping Ring

	DN ... ISO-KF	Part No.	A	B	C
Clamping ring half: aluminum 380.0/3.2162	10 – 16	211-016	42	54	16
Band: stainless steel 430/1.4016	20 – 25	211-017	52	64	16
Bolt, nut & thread: steel zinc plated	32 – 40	211-018	67	79	16



Claw Grip

	DN ... ISO-KF	Part No.	A	B	C	D	E	Set of
Claw: aluminum 6081/3.2215	10 – 50	211-015	19.5	11.5	12.5	20	14	4 pcs.
Screw & washer: stainless steel								
Claw: stainless steel 304/1.4301	10 – 50	211-020	19.5	11.5	12.5	20	14	4 pcs.
Screw & washer: stainless steel								




ISO-KF Small Flange Components

SEALS

centering ring


Aluminum

	DN ... ISO-KF	Part No.	A	B	C	D
Ring: aluminum 6026/EN AW-6026 T6	10	211-051	12	10	8	3.9
Seal: elastomer CR	16	211-052	17	16	8	3.9
	20	211-053	22	20	8	3.9
	25	211-054	26	25	8	3.9
	32	211-055	34	32	8	3.9
	40	211-056	41	40	8	3.9
	50	211-057	52	50	8	3.9
Ring: aluminum 6026/EN AW-6026 T6	10	211-058	12	10	8	3.9
Seal: elastomer FPM	16	211-059	17	16	8	3.9
	20	211-060	22	20	8	3.9
	25	211-061	26	25	8	3.9
	32	211-062	34	32	8	3.9
	40	211-063	41	40	8	3.9
	50	211-064	52	50	8	3.9
Ring: aluminum 6026/EN AW-6026 T6	10	211-651	12	10	8	3.9
Seal: elastomer NBR	16	211-652	17	16	8	3.9
	20	211-653	22	20	8	3.9
	25	211-654	26	25	8	3.9
	32	211-655	34	32	8	3.9
	40	211-656	41	40	8	3.9
	50	211-657	52	50	8	3.9
Ring: aluminum 6026/EN AW-6026 T6	10	211-658	12	10	8	3.9
Seal: elastomer EPDM	16	211-659	17	16	8	3.9
	20	211-660	22	20	8	3.9
	25	211-661	26	25	8	3.9
	32	211-662	34	32	8	3.9
	40	211-663	41	40	8	3.9
	50	211-664	52	50	8	3.9
Ring: aluminum 6026/EN AW-6026 T6	10	211-665	12	10	8	3.9
Seal: elastomer VMQ (silicone)	16	211-666	17	16	8	3.9
	20	211-667	22	20	8	3.9
	25	211-668	26	25	8	3.9
	32	211-669	34	32	8	3.9
	40	211-670	41	40	8	3.9
	50	211-671	52	50	8	3.9

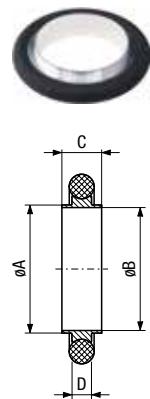


SEALS - continued**centering ring
stainless steel 303**

	DN ... ISO-KF	Part No.	A	B	C	D
Ring: stainless steel 303/1.4305	10	211-672	12	10	8	3.9
Seal: elastomer CR	16	211-673	17	16	8	3.9
	20	211-674	22	20	8	3.9
	25	211-675	26	25	8	3.9
	32	211-676	34	32	8	3.9
	40	211-677	41	40	8	3.9
	50	211-678	52	50	8	3.9
Ring: stainless steel 303/1.4305	10	211-065	12	10	8	3.9
Seal: elastomer FPM	16	211-066	17	16	8	3.9
	20	211-067	22	20	8	3.9
	25	211-068	26	25	8	3.9
	32	211-069	34	32	8	3.9
	40	211-070	41	40	8	3.9
	50	211-071	52	50	8	3.9
Ring: stainless steel 303/1.4305	10	211-679	12	10	8	3.9
Seal: elastomer NBR	16	211-680	17	16	8	3.9
	20	211-681	22	20	8	3.9
	25	211-682	26	25	8	3.9
	32	211-683	34	32	8	3.9
	40	211-684	41	40	8	3.9
	50	211-685	52	50	8	3.9
Ring: stainless steel 303/1.4305	10	211-686	12	10	8	3.9
Seal: elastomer EPDM	16	211-687	17	16	8	3.9
	20	211-688	22	20	8	3.9
	25	211-689	26	25	8	3.9
	32	211-690	34	32	8	3.9
	40	211-691	41	40	8	3.9
	50	211-692	52	50	8	3.9
Ring: stainless steel 303/1.4305	10	211-693	12	10	8	3.9
Seal: elastomer VMQ (silicone)	16	211-694	17	16	8	3.9
	20	211-695	22	20	8	3.9
	25	211-696	26	25	8	3.9
	32	211-697	34	32	8	3.9
	40	211-698	41	40	8	3.9
	50	211-699	52	50	8	3.9

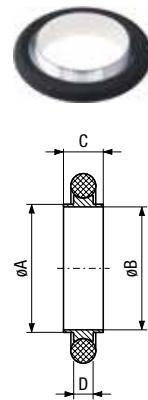


SEALS - continued**centering ring
stainless steel 316L**

	DN ... ISO-KF	Part No.	A	B	C	D
Ring: stainless steel 316L/1.4404	10	211-735	12	10	8	3.9
Seal: elastomer CR	16	211-736	17	16	8	3.9
	20	211-737	22	20	8	3.9
	25	211-738	26	25	8	3.9
	32	211-739	34	32	8	3.9
	40	211-740	41	40	8	3.9
	50	211-741	52	50	8	3.9
Ring: stainless steel 316L/1.4404	10	211-742	12	10	8	3.9
Seal: elastomer FPM	16	211-743	17	16	8	3.9
	20	211-744	22	20	8	3.9
	25	211-745	26	25	8	3.9
	32	211-746	34	32	8	3.9
	40	211-747	41	40	8	3.9
	50	211-748	52	50	8	3.9
Ring: stainless steel 316L/1.4404	10	211-749	12	10	8	3.9
Seal: elastomer NBR	16	211-750	17	16	8	3.9
	20	211-751	22	20	8	3.9
	25	211-752	26	25	8	3.9
	32	211-753	34	32	8	3.9
	40	211-754	41	40	8	3.9
	50	211-755	52	50	8	3.9
Ring: stainless steel 316L/1.4404	10	211-756	12	10	8	3.9
Seal: elastomer EPDM	16	211-757	17	16	8	3.9
	20	211-758	22	20	8	3.9
	25	211-759	26	25	8	3.9
	32	211-760	34	32	8	3.9
	40	211-761	41	40	8	3.9
	50	211-762	52	50	8	3.9
Ring: stainless steel 316L/1.4404	10	211-763	12	10	8	3.9
Seal: elastomer VMQ (silicone)	16	211-764	17	16	8	3.9
	20	211-765	22	20	8	3.9
	25	211-766	26	25	8	3.9
	32	211-767	34	32	8	3.9
	40	211-768	41	40	8	3.9
	50	211-769	52	50	8	3.9

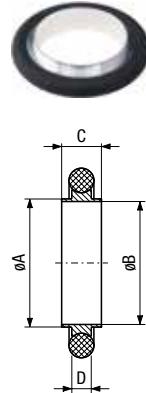


SEALS - continued**centering ring
without O-ring**

	DN ... ISO-KF	Part No.	A	B	C
Aluminum 6026/EN AW-6026 T6	10	201-301	12	10	8
	16	201-302	17	16	8
	20	201-303	22	20	8
	25	201-304	26	25	8
	32	201-305	34	32	8
	40	201-306	41	40	8
	50	201-307	52	50	8
Stainless steel 303/1.4305	10	201-308	12	10	8
	16	201-309	17	16	8
	20	201-310	22	20	8
	25	201-311	26	25	8
	32	201-312	34	32	8
	40	201-313	41	40	8
	50	201-314	52	50	8
Stainless steel 316L/1.4404	10	201-375	12	10	8
	16	201-376	17	16	8
	20	201-377	22	20	8
	25	201-378	26	25	8
	32	201-379	34	32	8
	40	201-380	41	40	8
	50	201-381	52	50	8


**external
centering ring**

	DN ... ISO-KF	Part No.	A	B	C	D
Ring: aluminum 6026/EN AW-6026 T6	10-16	211-081	32	30.2	7	3.9
	20-25	211-082	42	40.2	7	3.9
	32-40	211-083	57	55.2	7	3.9
	50	211-084	77	75.2	7	3.9
Ring: aluminum 6026/EN AW-6026 T6	10-16	211-085	32	30.2	7	3.9
	20-25	211-086	42	40.2	7	3.9
	32-40	211-087	57	55.2	7	3.9
	50	211-088	77	75.2	7	3.9
Ring: aluminum 6026/EN AW-6026 T6	10-16	211-700	32	30.2	7	3.9
	20-25	211-701	42	40.2	7	3.9
	32-40	211-702	57	55.2	7	3.9
	50	211-703	77	75.2	7	3.9
Ring: aluminum 6026/EN AW-6026 T6	10-16	211-704	32	30.2	7	3.9
	20-25	211-705	42	40.2	7	3.9
	32-40	211-706	57	55.2	7	3.9
	50	211-707	77	75.2	7	3.9
Ring: aluminum 6026/EN AW-6026 T6	10-16	211-708	32	30.2	7	3.9
	20-25	211-709	42	40.2	7	3.9
	32-40	211-710	57	55.2	7	3.9
	50	211-711	77	75.2	7	3.9

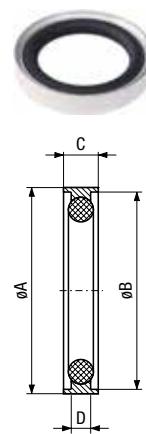


SEALS - continued**reducing centering ring**

	DN ... ISO-KF	Part No.	A	B	C	D	E
Ring: aluminum 6026/EN AW-6026 T6	10 / 16	211-072	17	10	12	8	3.9
Seal: elastomer CR	20 / 25	211-073	26	20	22	8	3.9
	32 / 40	211-074	41	32	34	8	3.9
Ring: aluminum 6026/EN AW-6026 T6	10 / 16	211-075	17	10	12	8	3.9
Seal: elastomer FPM	20 / 25	211-076	26	20	22	8	3.9
	32 / 40	211-077	41	32	34	8	3.9
Ring: aluminum 6026/EN AW-6026 T6	10 / 16	211-712	17	10	12	8	3.9
Seal: elastomer NBR	20 / 25	211-713	26	20	22	8	3.9
	32 / 40	211-714	41	32	34	8	3.9
Ring: aluminum 6026/EN AW-6026 T6	10 / 16	211-715	17	10	12	8	3.9
Seal: elastomer EPDM	20 / 25	211-716	26	20	22	8	3.9
	32 / 40	211-717	41	32	34	8	3.9
Ring: aluminum 6026/EN AW-6026 T6	10 / 16	211-718	17	10	12	8	3.9
Seal: elastomer VMQ (silicone)	20 / 25	211-719	26	20	22	8	3.9
	32 / 40	211-720	41	32	34	8	3.9
Ring: stainless steel 303/1.4305	10 / 16	211-721	17	10	12	8	3.9
Seal: elastomer CR	20 / 25	211-722	26	20	22	8	3.9
	32 / 40	211-723	41	32	34	8	3.9
Ring: stainless steel 303/1.4305	10 / 16	211-078	17	10	12	8	3.9
Seal: elastomer FPM	20 / 25	211-079	26	20	22	8	3.9
	32 / 40	211-080	41	32	34	8	3.9
Ring: stainless steel 303/1.4305	10 / 16	211-724	17	10	12	8	3.9
Seal: elastomer NBR	20 / 25	211-725	26	20	22	8	3.9
	32 / 40	211-726	41	32	34	8	3.9
Ring: stainless steel 303/1.4305	10 / 16	211-727	17	10	12	8	3.9
Seal: elastomer EPDM	20 / 25	211-728	26	20	22	8	3.9
	32 / 40	211-729	41	32	34	8	3.9
Ring: stainless steel 303/1.4305	10 / 16	211-730	17	10	12	8	3.9
Seal: elastomer VMQ (silicone)	20 / 25	211-731	26	20	22	8	3.9
	32 / 40	211-732	41	32	34	8	3.9

**centering ring with filter**

	DN ... ISO-KF	Part No.	A	B	C	D	E*
Ring: stainless steel 303/1.4305	10	211-089	12	8	8	3.9	0.5m³/h
Seal: elastomer FPM	16	211-090	17	14	8	3.9	1.2m³/h
Filter: stainless steel 316L/1.4435	25	211-092	26	23	8	3.9	4.2m³/h
	40	211-094	41	38	8	3.9	11.3m³/h
	50	211-095	52	48	8	3.9	18.1m³/h

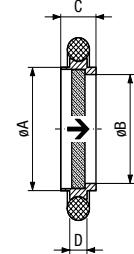


Pore size: 0.02 mm

* Air at 0°C, 20 mbar differential pressure

→ Recommended gas flow direction

SEALS - continued**centering ring****with fine filter**

	DN ... ISO-KF	Part No.	A	B	C	D
Inner ring: stainless steel 303/1.4305	10	211-096	12	9	8	3.9
Snab ring: stainless steel 304/1.4301	16	211-097	17	13	8	3.9
Seal: elastomer FPM	25	211-098	26	22	8	3.9
Filter: stainless steel 316L/1.4435	40	211-099	41	35.5	8	3.9
	50	211-100	52	45.7	8	3.9

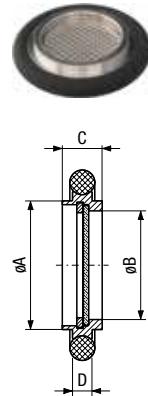


Pore size: 0.004 mm

Degree of separation at 0.001 mm up to 98%

centering ring**with throttle**


	DN ... ISO-KF	Part No.	A	B	C	D	E
Ring: aluminum 6082/3.2315	16	211-622	17	13	8	3.9	6.2
Inner parts: stainless steel 301/1.4310	25	211-623	26	18	8	3.9	9
stainless steel 303/1.4305	40	211-624	41	30	8	3.9	14.3
Seal: elastomer FPM	50	211-625	52	42	8	3.9	19.9

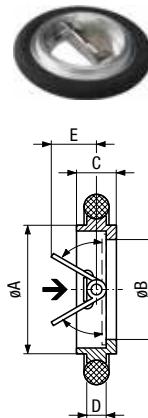

→ Recommended gas flow direction

O-Ring


	DN ... ISO-KF	Part No.	A	B	Set of
Elastomer CR	10	211-146	15	5	10 pcs.
	16	211-147	18	5	10 pcs.
	20	211-148	25	5	10 pcs.
	25	211-149	28	5	10 pcs.
	32	211-150	40	5	10 pcs.
	40	211-151	42	5	10 pcs.
	50	211-152	55	5	10 pcs.
Elastomer FPM	10	211-153	15	5	10 pcs.
	16	211-154	18	5	10 pcs.
	20	211-155	25	5	10 pcs.
	25	211-156	28	5	10 pcs.
	32	211-157	40	5	10 pcs.
	40	211-158	42	5	10 pcs.
	50	211-159	55	5	10 pcs.



SEALS - continued**indium seal**

	DN ... ISO-KF	Part No.	A	B	C	D	E
Inner ring: stainless steel 304/1.4301	10-16	211-162	32	18	30	3.9	7
Outer ring: aluminum 5012/-	20-25	211-163	42	28	40	3.9	7
Seal: indium	32-40	211-164	57	43	55	3.9	7
	50	211-165	77	63	75	3.9	7


Working temperature -196° ... +60°C

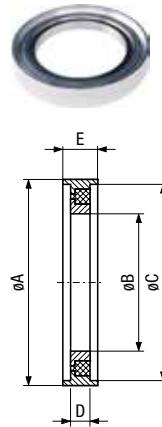**aluminum seal**

	DN ... ISO-KF	Part No.	A	B	C	D	*
Aluminum annealed 6082/3.2315	10-16	211-167	25.6	19.6	4.5	22.6	211-171
	20-25	211-168	35.6	29.6	4.5	32.6	211-172
	32-40	211-169	50.6	44.6	4.5	47.6	211-173
	50	211-170	65.6	59.6	4.5	62.6	211-174


Set of 3 pieces

* With support ring

**support for
aluminum seal**

	DN ... ISO-KF	Part No.	A	B	For Aluminum Seal
Stainless steel 301/1.4301	10-16	211-171	32	7	211-167
	20-25	211-172	42	7	211-168
	32-40	211-173	57	7	211-169
	50	211-174	77	7	211-170


Reusable




ISO-KF Small Flange Components

FLANGES

Blank Flange	DN ... ISO-KF	Part No.	A
Aluminum 6082/-	10	211-176	5
	16	211-177	5
	25	211-178	5
	40	211-179	5
	50	211-180	6
Stainless steel 304/1.4301	10	211-181	5
	16	211-182	5
	25	211-183	5
	40	211-184	5
	50	211-185	6
Stainless steel 316L/1.4404	10	211-791	5
	16	211-792	5
	25	211-793	5
	40	211-794	5
	50	211-795	6

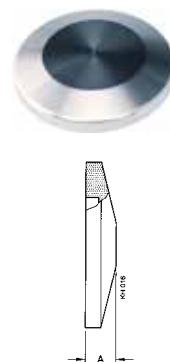


Flange with Tube, Short	DN ... ISO-KF	Part No.	A	B	C
Steel -/1.0037	10	211-201	20	12	16
	16	211-202	20	16	20
	25	211-203	20	26	30
	40	211-204	20	41	45
	50	211-205	20	51	55
Stainless steel 304/1.4301	10	211-211	20	12	16
	16	211-212	20	16	20
	25	211-213	20	26	30
	40	211-214	20	41	45
	50	211-215	20	50	54
Stainless steel 316L/1.4404	10	211-826	20	12	16
	16	211-827	20	16	20
	25	211-828	20	26	30
	40	211-829	20	41	45
	50	211-830	20	50	54

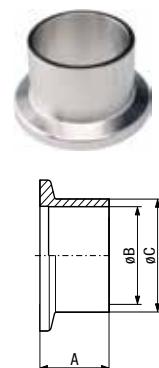

FLANGES - continued


Flange with Tube, Medium

	DN ... ISO-KF	Part No.	A	B	C
Stainless steel 304/1.4301	10	211-221	30	12	16
	16	211-222	30	16	20
	25	211-223	30	26	30
	40	211-224	30	41	45
	50	211-225	30	51	55
Stainless steel 316L/1.4404	10	211-831	30	12	16
	16	211-832	30	16	20
	25	211-833	30	26	30
	40	211-834	30	41	45
	50	211-835	30	50	54



Flange with Tube, Long

	DN ... ISO-KF	Part No.	A	B	C
Steel -/1.0037	10	211-206	70	12	16
	16	211-207	70	16	20
	25	211-208	70	26	30
	40	211-209	70	41	45
	50	211-210	70	51	55
Stainless steel 304/1.4301	10	211-216	70	12	16
	16	211-217	70	16	20
	25	211-218	70	26	30
	40	211-219	70	41	45
	50	211-220	70	50	54
Stainless steel 316L/1.4404	10	211-836	70	12	16
	16	211-837	70	16	20
	25	211-838	70	26	30
	40	211-839	70	41	45
	50	211-840	70	50	54




ISO-KF Small Flange Components

PIPE FITTINGS


Elbow 90° Aluminum

	DN ... ISO-KF	Part No.	A	B
Aluminum 6082/-	10	211-251	30	12
	16	211-252	40	16
	25	211-253	50	25
	40	211-254	65	39

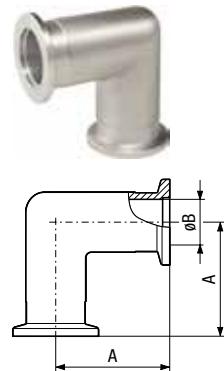


Elbow 90° Stainless Steel

	DN ... ISO-KF	Part No.	A	B
Stainless steel 304/1.4301	10	211-286	30	9
	16	211-287	40	15
	25	211-288	50	25
	40	211-289	65	40.5
	50	211-290	70	49

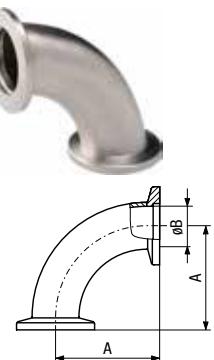

Elbow 45°


	DN ... ISO-KF	Part No.	A	B	C
Stainless steel 304/1.4301	16	211-307	26	55	15
	25	211-308	32	68.8	25
	40	211-309	40	87.7	37

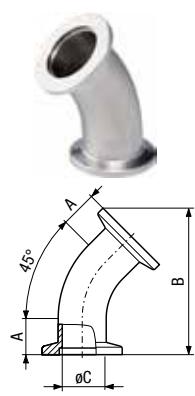

PIPE FITTINGS – continued


Tee

	DN ... ISO-KF	Part No.	A	B	C
Aluminum 6082/-	10	211-261	30	60	12
	16	211-262	40	80	16
	25	211-263	50	100	25
	40	211-264	65	130	39
Stainless steel 304/1.4301	10	211-291	30	60	12
	16	211-292	40	80	16
	25	211-293	50	100	25
	40	211-294	65	130	40.5
	50	211-295	70	140	53

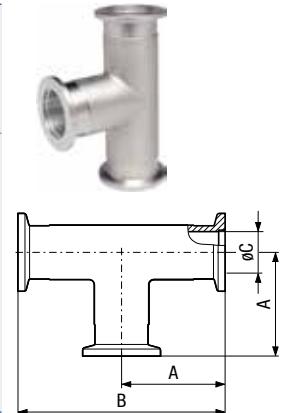


Reducing Tee

	DN ... ISO-KF	Part No.	A	B	C
Stainless steel 304/1.4301	25/16	211-316	50	100	40
	40/16	211-317	65	130	40
	40/25	211-318	65	130	50
	50/16	211-319	70	140	50
	50/25	211-320	70	140	65
	50/40	211-321	70	140	65

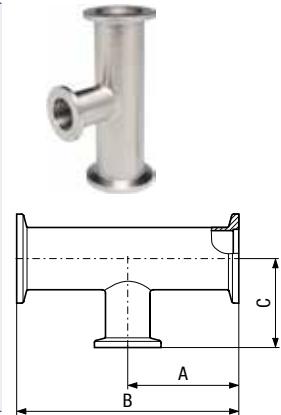

Cross


	DN ... ISO-KF	Part No.	A	B	C
Aluminum 6082/3.2315	10	211-266	30	60	12
	16	211-267	40	80	16
	25	211-268	50	100	25
	40	211-269	65	130	39
Stainless steel 304/1.4301	10	211-296	30	60	12
	16	211-297	40	80	16
	25	211-298	50	100	25
	40	211-299	65	130	40.5
	50	211-300	70	140	53

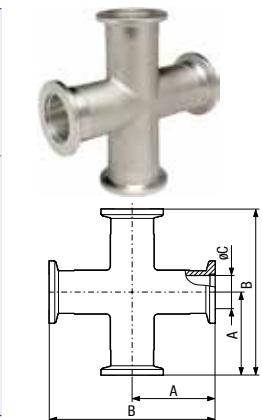

PIPE FITTINGS - continued


Reducing Cross

	DN ... ISO-KF	Part No.	A	B	C	D	E	F
Aluminum 6082/3.2315	25/16	211-271	35	70	35	70	25	16
	40/16	211-272	40	80	45	90	39	16
Stainless steel 304/1.4301	25/16	211-301	35	70	35	70	25	17
	40/16	211-302	40	80	45	90	40.5	16
	50/16	211-303	50	100	50	100	53	16

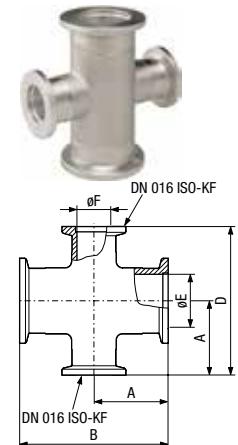


Intermediate Piece

	DN ... ISO-KF	Part No.	A	B
Aluminum 6082/-	16	211-227	80	16
	25	211-228	100	25
	40	211-229	130	40
Stainless steel 304/1.4301	16	211-277	80	16
	25	211-278	100	25
	40	211-279	130	40.5
	50	211-280	140	53

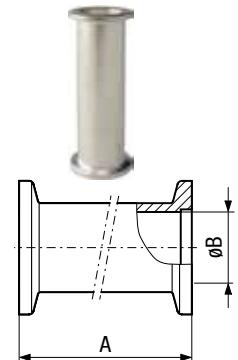

Reducer

	DN ... ISO-KF	Part No.	A	B
Aluminum 6082/-	25/16	211-231	40	16
	40/16	211-232	40	16
	40/25	211-233	40	25
	50/40	211-234	40	40
Stainless steel 303/1.4305	25/16	211-281	40	16
	40/16	211-282	40	16
	40/25	211-283	40	26
	50/16	211-323	40	16
	50/25	211-324	40	26
	50/40	211-284	40	40

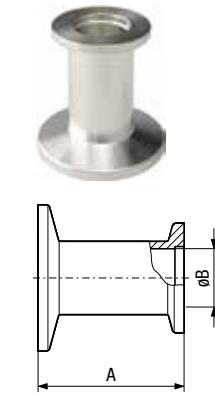

ISO-KF Small Flange Components

BELLOWS/HOSE WITH FLANGES


Bellows	DN ... ISO-KF	Part No.	A	B	C	D	E
Flanges: stainless steel 304/1.4301	10	211-326	70	3.5	3	23°	5
Bellows: stainless steel 316Ti/-	16	211-327	70	6.4	4.1	21°	4
	25	211-328	80	8	5	17°	3.5
	40	211-329	100	11	7	15°	7
	50	211-330	100	10	6	15°	8

Max. internal pressure: 4bar


A = unstressed length

D = max. deviation from axis

E = lateral displacement




Metal Hose, Flexible	DN ... ISO-KF	Part No.	A	B	C
Flanges: stainless steel 304/1.4301	10	211-331	250	70	32
Bellows: stainless steel 316Ti/-	10	211-332	500	70	32
	10	211-333	750	70	32
	10	211-334	1000	70	32
	16	211-335	250	70	50
	16	211-336	500	70	50
	16	211-337	750	70	50
	16	211-338	1000	70	50
	16	211-531	1500	70	50
	16	211-532	2000	70	50
	25	211-339	250	100	60
	25	211-340	500	100	60
	25	211-341	750	100	60
	25	211-342	1000	100	60
	25	211-533	1500	100	103
	25	211-534	2000	100	103
	40	211-343	250	130	100
	40	211-344	500	130	100
	40	211-345	750	130	100
	40	211-346	1000	130	100
	40	211-535	1500	130	129
	40	211-536	2000	130	129
	50	211-347	250	200	130
Max. internal pressure: 4 bar	50	211-348	500	200	130
B = radius for multiple bending	50	211-349	750	200	130
C = radius for single bend	50	211-350	1000	200	130

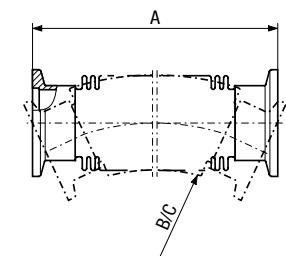


BELLOWS/HOSE WITH FLANGES - continued**Metal Hose, High Flexible**

	DN ... ISO-KF	Part No.	A	B	C
Flanges: stainless steel 304/1.4301	16	211-515	250	40	25
Bellow: stainless steel 316Ti/-	16	211-516	500	40	25
	16	211-517	750	40	25
	16	211-518	1000	40	25
	25	211-519	250	55	36
	25	211-520	500	55	36
	25	211-521	750	55	36
	25	211-522	1000	55	36
	40	211-523	250	90	60
	40	211-524	500	90	60
	40	211-525	750	90	60
Max. internal pressure: 2 bar	40	211-526	1000	90	60
B = radius for multiple bending	50	211-527	250	100	65
C = radius for single bend	50	211-528	500	100	65

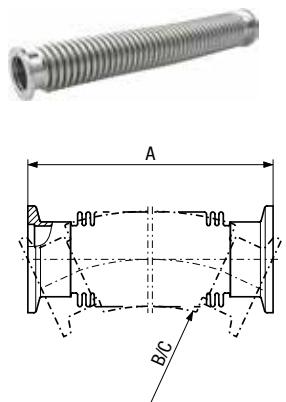**PVC Hose**

	DN ... ISO-KF	Part No.	A	B	C
Hose: PVC with cast in steel spiral	16	211-406	500	130	65
Nipple: aluminum 6082/-	16	211-407	1000	130	65
Hose clamp: stainless steel 430/-	16	211-509	1500	130	65
	25	211-408	500	200	100
	25	211-409	1000	200	100
	25	211-412	2000	200	100
B = radius for multiple bending	40	211-410	500	260	130
C = radius for single bend	40	211-411	1000	260	130

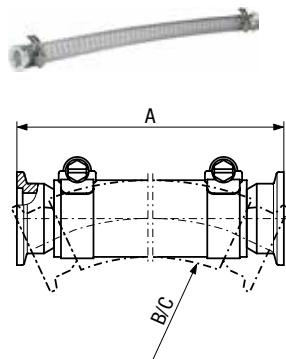


ISO-KF Small Flange Components


TRANSITION PIECES

**Adaptor
ISO-KF/ISO-K**


	ISO-KF/ISO-K	Part No.	A
Aluminum 6082/-	40/63	212-171	40
	50/63	212-172	45
Stainless steel 303/1.4305	40/63	212-173	40
	50/63	212-174	45
	40/100	212-175	40


**Adaptor
ISO-KF/CF-F**

	ISO-KF/CF-F	Part No.	A	B
Stainless steel 304/1.4301	16/16	213-251	35	16
	25/16	213-252	35	16
	16/40	213-254	30	16
	25/40	213-255	30	26
	40/40	213-256	50	37
	40/63	213-259	35	41
	40/100	213-262	50	41


**Adaptor
ISO-KF/VCR Female**

	ISO-KF/VCR	Part No.	A
Flange: stainless steel 304/1.4301	16/ 1/4"	211-359	35.8
Nut: stainless steel 316L/1.4435	25/ 1/4"	211-480	35.8
	25/ 1/2"	211-360	40.6
	40/ 3/4"	211-361	53.3



Width across flats in inch

TRANSITION PIECES - continued

Adaptor ISO-KF/VCR Male


	ISO-KF/VCR	Part No.	A
Flange: stainless steel 304/1.4301	16/ 1/4"	211-362	35.8
Nut: stainless steel 316L/1.4435	25/ 1/4"	211-481	35.8
	25/ 1/2"	211-363	40.6
	40/ 3/4"	211-364	53.3

Width across flats in inch




Adaptor ISO-KF/Swagelok

	ISO-KF/Swagelok	Part No.	A	B
Flange: stainless steel 304/1.4301	16/6 mm	211-356 ¹⁾	37	15.3
Nut: stainless steel 316L/1.4435	25/10 mm	211-357 ¹⁾	45	17.2
	40/16 mm	211-358 ¹⁾	53	24.4
	16/ 1/8"	211-476 ²⁾	34.5	12.7
	25/ 1/4"	211-477 ²⁾	37	15.3
	40/ 1/4"	211-478 ²⁾	37	15.3
	40/ 1/2"	211-479 ²⁾	47.5	22.8

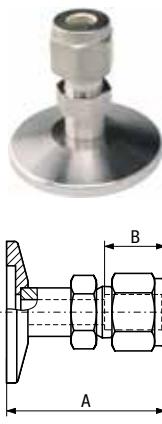¹⁾ Width across flats metric (SI)²⁾ Width across flats in inch

Glass Tube Connection

	DN ... ISO-KF	Part No.	A	B	C	D
Flange: aluminum 6082/-	10	211-351	50	8	10	30
Sealing: elastomer FPM	40	211-353	65	22	26	45
Tube: glas Pyrex						

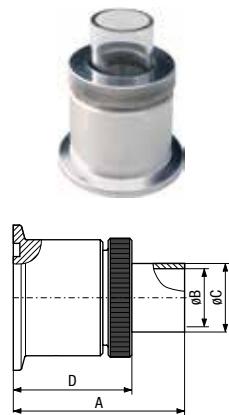


TRANSITION PIECES - continued

Screw-in Flange

	ISO-KF/DN	Part No.	A	B	C	D
Flange: stainless steel 303/1.4305	16/ M16x1.5	211-372	42	11.5	M16x1.5	10.5
Sealing: elastomer FPM	10/ G 3/8"	211-366	35	15	G 3/8"	12
	16/ G 1/2"	211-367	35	15	G 1/2"	16
	25/ G 1"	211-368	45	25	G 1"	25
	40/ G 1 1/2"	211-369	50	30	G 1 1/2"	41


Width across flats metric (SI)



Screw-on Flange

	ISO-KF/DN	Part No.	A	B	C	D
Flange: stainless steel 303/1.4305	10/ G 3/8"	211-376	35	15	G 3/8"	10
Sealing: elastomer FPM	16/ G 1/2"	211-377	35	15	G 1/2"	15
)	25/ G 1"	211-378	45	25	G 1"	24
)	40/ G 1 1/2"	211-379	50	30	G 1 1/2"	38

Width across flats metric (SI)




TRANSITION PIECES - continued

Adaptor ISO-KF/NPT Female

	ISO-KF/NPT	Part No.	A	B	C	D
Stainless steel 303	16/ 1/8"	211-566	19	10	12	1/8-27 NPT
	16/ 1/4"	211-567	19	13	15	1/4-18 NPT
	25/ 1/8"	211-569	19	10	12	1/8-27 NPT
	25/ 1/4"	211-570	19	13	15	1/4-18 NPT
	25 / 1/2"	211-571	26	18	25	1/2-14 NPT
	25 / 1"	211-572	42	24	25	1-11 1/2 NPT
	40 / 1/4"	211-574	19	13	15	1/4-18 NPT
	40 / 1/2"	211-575	26	18	25	1/2-14 NPT
	40 / 1"	211-576	26	23	41	1-11 1/2 NPT


Width across flats in inch

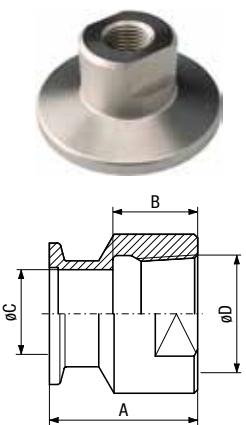

Adaptor ISO-KF/NPT Male

	ISO-KF/NPT	Part No.	A	B	C	D
Stainless steel 303 / 1.4305	16/ 1/8"	211-551	40	17	5	1/8-27 NPT
	16/ 1/4"	211-552	40	22	7	1/4-18 NPT
	25/ 1/8"	211-554	40	17	5	1/8-27 NPT
	25/ 1/4"	211-555	40	22	7	1/4-18 NPT
	25 / 1/2"	211-556	50	30	14	1/2-14 NPT
	25 / 1"	211-557	60	32	25	1-11 1/2 NPT
	40 / 1/4"	211-559	40	21	7	1/4-18 NPT
	40 / 1/2"	211-560	50	30	14	1/2-14 NPT
	40 / 1"	211-561	60	33	25	1-11 1/2 NPT
	40 / 1 1/4"	211-562	50	31.5	32	1 1/4-11 1/2 NPT
	40 / 1 1/2"	211-563	50	28	32	1 1/2-11 1/2 NPT
	40 / 2"	211-564	50	27	40	2-11 1/2 NPT

Width across flats in inch

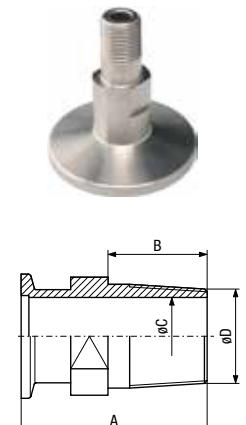


ISO-KF Small Flange Components

HOSE, HOSE CONNECTION

Hose Adaptor 90°


	DN ... ISO-KF	Part No.	A	B	C	D
Aluminum 6082/-	16	211-257	40	40	16	13
	25	211-258	50	50	25	22
	40	211-259	65	65	40	37



C = nominal connection for sleeve / hose

Hose Adaptor for Rubber Hose


	DN ... ISO-KF	Part No.	A	B	C
Aluminum 6082/-	16	211-387	40	7	12
	25	211-388	40	7	12
	40	211-389	40	7	12
Stainless steel 303/1.4305	16	211-392	40	7	12
	25	211-393	40	7	12
	40	211-394	40	7	12



C = nominal connection for hose

Hose Connection

	DN ... ISO-KF	Part No.	A	B	C
Aluminum 6082/-	25	211-401	40	13	16
	16	211-402	40	13	16
	25	211-403	40	22	25
	40	211-404	40	37	40




C = nominal connection for sleeve / hose

HOSE, HOSE CONNECTION - continued

Sleeve with Hose Clamp


	DN ... ISO-KF	Part No.	A	B	C	D	E
Hose clamp: stainless steel 430/-	16	211-417	58	7	14	16	44
Sleeve: elastomer CR	25	211-418	60	9	16	25	50
	40	211-419	64	13	20	40	68

Max. internal pressure: 1 bar

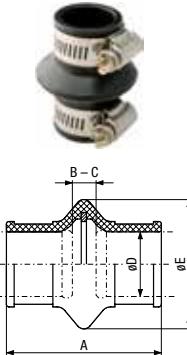

Hose Clamp


	DN ... ISO-KF	Part No.	A	B
Stainless steel 430/-	16	211-461	13	32
	25	211-462	19	44
	40	211-463	29	76



PVC Hose

	DN ... ISO-KF	Part No.	A	B	C
With cast in spiral	16	211-442	23	16	130
	25	211-443	33	25	200
	40	211-444	50	40	260

or vacuum applications
Indicate length in meters



Rubber Hose


	DN ... ISO-KF	Part No.	A	B
For vacuum applications	10	211-451	17	7
	16	211-452	25	10
	20	211-453	32	16

Indicate length in meters
Hardness: 55 ± 5 Shore A
Temperature: -30 ... +85 °C



HOSE, HOSE CONNECTION - continued


Protective Lid	DN ... ISO-KF	Part No.	A	B	C
Polyethylene	10-16	211-427	32	29	7.5
	20-25	211-428	42	39	7.5
	32-40	211-429	57	54	7.5
	50	211-430	77	74	7.5

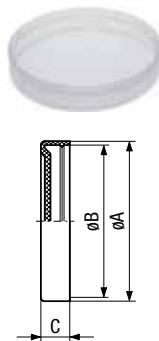


ISO-K Clamp Flange Components

CONNECTION ELEMENTS


Clamp	DN ... ISO-K	Part No.	A	B	C	Set of
Steel zinc plated 1045/-	63-250	212-225	60	17	27	4 pcs.
	320-500	212-226	78	27	39	4 pcs.
	630	212-227	88	31	49	4 pcs.
Stainless steel 316/-	63-250	212-228	61	18	28	4 pcs.
	320-630	212-240	82	29	47	4 pcs.

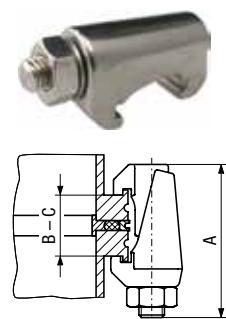

Clamp Without groove	DN ... ISO-K	Part No.	A	B	C	Set of
Clamp: aluminum 6082/-	160-250	212-432	23	35	13.9	4 pcs.
Screw: steel zinc plated 1045/-						
Clamp: steel zinc plated 1045/-	63-100	212-231	22.5	35	13.9	4 pcs.
	160-250	212-232	23	35	13.9	4 pcs.
	320-500	212-233	36.5	50	20.6	4 pcs.
	630	212-234	41.5	55	25.6	4 pcs.




Clamp Base plate with groove	DN ... ISO-K	Part No.	A	B	C	Set of
Clamp: steel zinc plated 1045/-	63-100	212-235	18.6	30	10	4 pcs.
Screw: steel zinc plated 1045/-	160-250	212-236	19	35	10	4 pcs.
	320-500	212-237	31	45	15	4 pcs.
	630	212-238	36.5	50	20.6	4 pcs.



CONNECTION ELEMENTS - continued

Clamp Flange with groove	DN ... ISO-K	Part No.	A	B	C	Set of
Steel zinc plated 1045/-	63-100	212-247	20.6	30	12	4 pcs.
	160-250	212-248	21.1	35	12	4 pcs.
	320-500	212-249	33.9	45	18	4 pcs.
	630	212-233	36.5	50	20.6	4 pcs.


Clamping flange with groove / base plate



ISO-K Clamp Flange Components


SEALS

Centering Ring		DN ... ISO-K	Part No.	A	B	C	D
Inner ring:	aluminum 6082/-	63	212-251	96	70	3.9	8
Outer ring:	aluminum 6082/-	80	212-091	109	83	3.9	8
Seal:	elastomer CR	100	212-252	128	102	3.9	8
		160	212-253	179	153	3.9	8
		200	212-254	239	213	3.9	8
		250	212-255	287	261	3.9	8
		320	212-256	358	318	5.6	14
		400	212-257	440	400	5.6	14
		500	212-258	541	501	5.6	14
		630	212-259	691	651	5.6	14
Inner ring:	aluminum 6082/-	63	212-261	96	70	3.9	8
Outer ring:	aluminum 6082/-	80	212-092	109	83	3.9	8
Seal:	elastomer FPM	100	212-262	128	102	3.9	8
		160	212-263	179	153	3.9	8
		200	212-264	239	213	3.9	8
		250	212-265	287	261	3.9	8
		320	212-266	358	318	5.6	14
		400	212-267	440	400	5.6	14
		500	212-268	541	501	5.6	14
		630	212-269	691	651	5.6	14
		800	212-270	840	800	5.6	14
		1000	212-271	1040	1000	5.6	14
Inner ring:	stainless steel 304/-	63	212-281	96	70	3.9	8
Outer ring:	aluminum 6082/-	80	212-093	109	83	3.9	8
Seal:	elastomer FPM	100	212-282	128	102	3.9	8
		160	212-283	179	153	3.9	8
		200	212-284	239	213	3.9	8
		250	212-285	287	261	3.9	8

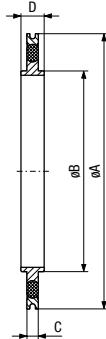

SEALS - continued**Centering Ring
with Fine Filter**

	DN ... ISO-K	Part No.	A	B	C	D
Inner ring: stainless steel 304/-	63	212-291	62	69.8	3.9	8
Outer ring: aluminum 6082/-	100	212-292	94	101.8	3.9	8
Seal: elastomer FPM						
Snap ring: stainless steel 304/-						
Filter grit: stainless steel 304/-						
Filter: stainless steel 316L/-						



Pore size 0.004 mm
Degree of separation at 0.001 mm up to 98%

O-Ring

	DN ... ISO-K	Part No.	A	B	Set of
Elastomer CR	63	212-386	75.6	5.3	5 pcs.
	80	212-387	88.3	5.3	5 pcs.
	100	212-388	107.3	5.3	5 pcs.
	160	212-389	158.1	5.3	5 pcs.
	200	212-390	208.9	5.3	5 pcs.
	250	212-391	253.4	5.3	5 pcs.
	320	212-356	329.6	7	—
	400	212-357	405.3	7	—
	500	212-358	506.9	7	—
	630	212-359	658.9	7	—
Elastomer FPM	63	212-392	75.6	5.3	5 pcs.
	80	212-393	88.3	5.3	5 pcs.
	100	212-394	107.3	5.3	5 pcs.
	160	212-395	158.1	5.3	5 pcs.
	200	212-396	208.9	5.3	5 pcs.
	250	212-397	253.4	5.3	5 pcs.
	320	212-366	329.6	7	—
	400	212-367	405.3	7	—
	500	212-368	506.9	7	—
	630	212-369	658.9	7	—
	800	212-370	808	7	—
	1000	212-371	1006	7	—



SEALS - continued


Aluminum Seal	DN ... ISO-K	Part No.	A	B	C	D	E
Aluminum annealed 6082/-	63	212-301	85.6	83	69.8	2.6	4.5
	100	212-302	116.6	114	101.8	2.6	4.5
	160	212-303	166.6	164	152.8	2.6	4.5
	250	212-305	276.6	274	260.8	2.6	4.5
Number of		Clamps	Claw Grips				
	DN 63 ISO -K	4					
	DN 100 ISO-K	6		8			
	DN 160 ISO-K	8		8			
	DN 250 ISO-K	12		12			




ISO-K Clamp Flange Components

FLANGES

Blank Flange	DN ... ISO-K	Part No.	A	B
Aluminum EN AW-6082 T6	63	212-441	95	12
	100	212-442	130	12
	160	212-443	180	12
	200	212-444	240	12
	250	212-445	290	12
	320	212-446	370	17
Steel nickel plated A570/-	63	212-001	95	12
	100	212-002	130	12
	160	212-003	180	12
	250	212-005	290	12
Stainless steel 304/-	63	212-011	95	12
	80	212-076	110	12
	100	212-012	130	12
	160	212-013	180	12
	200	212-014	240	12
	250	212-015	290	12
	320	212-016	370	17
	400	212-017	450	17
	500	212-018	550	17
	630	212-019	690	22




Welding Flange	DN ... ISO-K	Part No.	A	B	C	D	E
Steel -/1.0570	63	212-021	95	76.1	70.3	12	6
	100	212-022	130	108	102.2	12	6
Steel A570/-	160	212-023	180	159	153.2	12	6
	250	212-025	290	267	261	12	6
Stainless steel 304/-	63	212-031	95	76.1	71.5	12	6
	80	212-078	110	88.9	84.9	12	6
	100	212-032	130	108	102	12	6
	160	212-033	180	159	155	12	6
	200	212-034	240	219.1	213.1	12	6
	250	212-035	290	267	261	12	6
	320	212-036	370	324	318	17	8.5
Stainless steel 304/-	250	212-385	290	261	254	12	6
	250	212-505	290	273	261	12	5

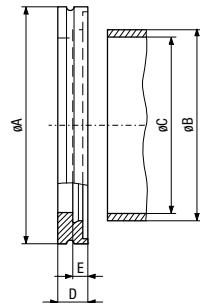

FLANGES - continued

Flange with Tube	DN ... ISO-K	Part No.	A	B	C
Flange: steel -/1.0570	63	212-041	100	76.1	70.3
Tube: steel -/1.0831	100	212-042	100	108	102.2
	160	212-043	100	159	153.2
	250	212-045	100	267	261
Stainless steel 304/-	63	212-051	100	76.1	71.5
	100	212-052	100	108	104
	160	212-053	100	159	155
	200	212-054	100	219.1	213.1
	250	212-055	100	267	261
	320	212-056	100	324	318
	400	212-057	100	406	400
	500	212-058	100	508	500
	630	212-059	100	660	650
Stainless steel 304/-	250	212-506	100	273	267




ISO-K Clamp Flange Components

PIPE FITTINGS


Elbow 90°

	DN ... ISO-K	Part No.	A	B
Stainless steel 304/-	63	212-101	88	66
	100	212-102	108	100
	160*	212-103	138	150
	200*	212-104	178	213
	250*	212-105	208	250
	320*	212-106	250	318

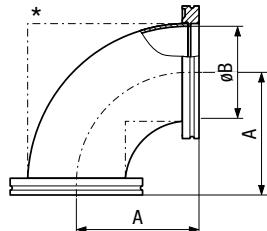


Tee

	DN ... ISO-K	Part No.	A	B
Stainless steel 304/-	63	212-111	88	66
	100	212-112	108	100
	160	212-113	138	150
	200	212-114	178	213
	250	212-115	208	250
	320	212-116	250	318

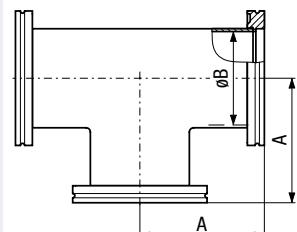

Reducing Tee


	DN ... ISO-K	Part No.	A	B	C
Stainless steel 304/-	160/63	212-196	138	276	130
	160/100	212-197	138	276	131
	250/200	212-198	190	380	208



PIPE FITTINGS - continued

Cross


	DN ... ISO-K	Part No.	A	B
Stainless steel 304/-	63	212-121	88	66
	100	212-122	108	100
	160	212-123	138	150
	200	212-124	178	213
	250	212-125	208	250

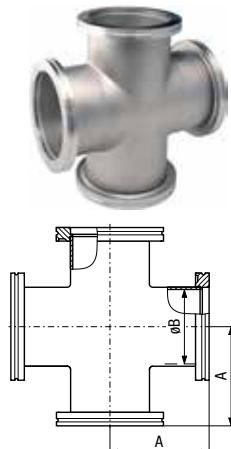

Reducing Cross


	DN ... ISO-K	Part No.	A	B	C	D	E
Stainless steel 304/-	63	212-131	88	44	66	64	59
	100	212-132	100	50	82	80	77
	160	212-133	100	50	107	107	105

1 x DN 16 ISO-KF
1 x DN 25 ISO-KF
1 x DN 40 ISO-KF

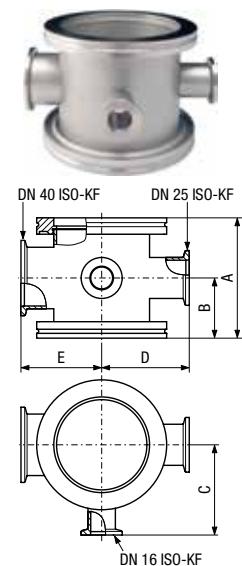


Reducer

	DN ... ISO-K	Part No.	A
Stainless steel 303/-	80/63	212-084	50
	100/63	212-161	50
	160/100	212-163	50
	200/160	212-166	50
	250/160	212-169	50
	250/200	212-170	50

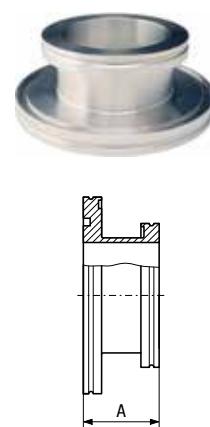

PIPE FITTINGS – continued


Intermediate Piece	DN ... ISO-K	Part No.	A	B
Stainless steel 304/–	63	212-191	100	70
	63	212-192	176	70

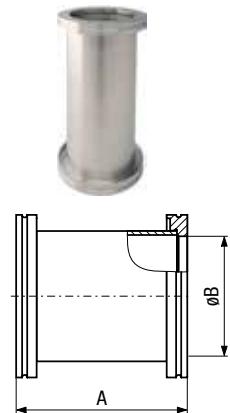

ISO-K Clamp Flange Components

BELLOWS / HOSE WITH FLANGES

Bellows	DN ... ISO-K	Part No.	A	B	C	D	E
Flanges: stainless steel 304/-	63	212-201	132	20	20	66	30°
Bellows: stainless steel 316Ti/-	100	212-202	132	28	28	95	30°
	160	212-203	150	22	22	153	14°
	200	212-204	150	20	20	213	12°
	250	212-205	200	30	30	261	13°
	320	212-206	250	50	50	313	12°




Max. internal pressure 1.5 bar

A = unstressed length

E = max. deviation from axis

Metal Hose	DN ... ISO-K	Part No.	A	B	C
Flanges: stainless steel 304/-	63	212-211	250	250	160
Bellows: stainless steel 316Ti/-	63	212-212	500	250	160
	63	212-213	750	250	160
	63	212-214	1000	250	160
	100	212-215	250	370	240
	100	212-216	500	370	240
	100	212-217	750	370	240
	100	212-218	1000	370	240
	160	212-222	1000	720	350

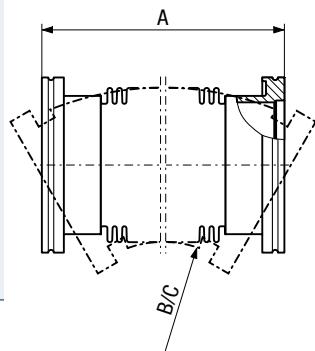

Max. internal pressure 1.5 bar

B = radius for multiple bending


C = radius for single bending

ISO-K Clamp Flange Components

TRANSITION PIECES


Adaptor Flange ISO-K/ISO-F

	ISO-K / ISO-F	Part No.	A
Stainless steel 304/-	160/63	212-152	22
	160/100	212-153	25
	200/100	212-155	20
	200/160	212-156	25
	250/160	212-159	22



Adaptor Flange ISO-K/ISO-KF


	ISO-K / ISO-KF	Part No.	A
Aluminum 6082/-	63/40	212-171	40
	63/50	212-172	45
Stainless steel 303/-	63/25	212-176	50
	63/40	212-173	40
	63/50	212-174	45
	100/40	212-175	40



TRANSITION PIECES - continued


Adaptor Flange CF/ISO-K

		ISO-CF / ISO-K Part No.	A	B	C
Stainless steel 304/-	63/63	213-271	90	1	1
	100/100	213-272	90	1	1
	160/160	213-273	90	1.5	1.5




Adaptor Flange DN/ISO-K

	DN ... ISO-K	Part No.	A	B
Aluminum 6082/-	63	212-181	51	76
	100	212-182	56	107
	160	212-183	56	156

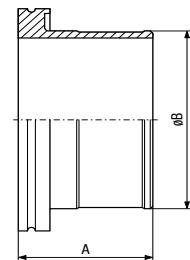

Sleeve with Hose Clamp

	DN ... ISO-KF	Part No.	A	B	C	D	E
Sleeve:	elastomer CR	212-186	70	14	24	75	120
Hose clamp:	stainless steel 430/-	212-187	72	8	26	106	150
		212-188	72	8	26	155	200




Max. internal pressure: 1 bar

ISO-K Clamp Flange Components

PROTECTIVE LIDS

Protective Lid	DN ... ISO-K	Part No.	A	B	C
Polyethylene	63	212-311	102	95	18
	100	212-312	137	130	18
	160	212-313	187	180	18
	200	212-314	248	240	18.5
	250	212-315	297.5	290	18.5
	320	212-316	380	370	23.5
	400	212-317	461	450	23.5
	500	212-318	557	550	24
	630	212-319	697	690	29

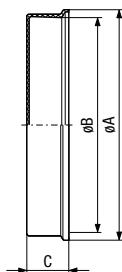


ISO-F Fixed Flange Components

FLANGE COMPONENTS

Collar Flange with Retaining Ring

	DN ... ISO-F	Part No.	A	B	C
Flange:	63	212-061	12	95.5	130
DN 63 - 160: steel nickel plated -/1.0831	80	212-081	12	110.5	145
DN 200 - 630: steel nickel plated -/1.0037	100	212-062	12	130.5	165
	160	212-063	16	180.7	225
Retaining ring: steel nickel plated	200	212-064	16	240.7	285
	250	212-065	16	290.7	335
	320	212-066	20	370.8	425
	400	212-067	20	450.8	510
	500	212-068	20	550.8	610
	630	212-069	24	691	750



Adaptor Flange ISO-K / ISO-F


	DN ... ISO-F	Part No.	A
Stainless steel 304/1.4301	160/63	212-152	22
	160/100	212-153	25
	200/100	212-155	20
	200/160	212-156	25
	250/160	212-159	22




FLANGE COMPONENTS - continued

Measurement Flange	DN ... ISO-F	Part No.	A	B	C
Aluminum 6082/3.2315	100	212-142	30	165	M 8
	160	212-143	30	225	M 10
Stainless steel 304/1.4301	63	212-146	30	130	M 8
	100	212-147	30	165	M 8
	160	212-148	30	225	M 10

*Claw grip DN 16 ISO-KF included




Set of Hexagon Bolts	DN ... ISO-F	Part No.	A	B	Set of
Steel zinc plated	63-100	212-241	40	8	8 pcs.
	160-250	212-242	50	10	12 pcs.
	320-500	212-243	70	12	16 pcs.
	630	212-244	80	12	20 pcs.



Sealing Disk	DN ... ISO-F	Part No.	A	B	C
Disk: aluminum 6082/3.2315	63	212-321	73	3.9	98
O-ring: elastomer CR	100	212-322	107	3.9	132
	160	212-323	160	3.9	185
	250	212-325	270	3.9	295
	320	212-326	330	5.6	375
	400	212-327	415	5.6	460
	500	212-328	515	5.6	560
	630	212-329	656	5.6	701
	800	212-330	825	5.6	870
	1000	212-331	1025	5.6	1070



O-Ring	DN ... ISO-F	Part No.	A	B	Set of
Elastomer CR	63	212-345	80	5	5 pcs.
	100	212-346	110	5	5 pcs.
	160	212-347	165	5	5 pcs.
	250	212-349	265	5	5 pcs.
	320	212-338	325	8	
	400	212-339	412	8	
	500	212-340	510	8	
	630	212-341	640	8	
	800	212-342	820	8	
	1000	212-343	1023	8	




UHV CF Components

CONNECTION ELEMENTS

Hexagonal Bolts with Nuts

	DN ... CF	Part No.	A	B	Set of	C*
Bolt:	stainless steel 316/1.4401	16	213-401	20	3.2	25 x M4
Washer:	stainless steel 304/1.4301	40	213-402	35	5	25 x M6
Nut:	stainless steel 316/1.4401	63	213-403	45	6.5	25 x M8
		100	213-404	50	6.5	25 x M8
		160	213-405	55	6.5	25 x M8
		200-250	213-406	60	6.5	25 x M8
		300	213-408	70	8	34 x M10
		350	213-409	70	8	38 x M10


* Tightening torque



Hexagonal Bolts without Nuts

	DN ... CF	Part No.	A	Set of	B*
Bolt:	stainless steel 316/1.4401	16	213-411	16	25 x M4
Washer:	stainless steel 304/1.4301	40	213-412	25	25 x M6
		63-160	213-413	35	25 x M8


* Tightening torque



Hexagonal Bolts with Duo Nuts

	DN...CF	Part No.	A	B	C	Duo nut	D*
Bolt:	stainless steel 316/1.4401	16	213-421	20	7	4	6 x M4/3
Washer:	stainless steel 304/1.4301	40	213-422	35	10	5	6 x M6/3
Duo nut:	stainless steel 316/1.4401	63	213-423	45	12	8	8 x M8/3
		100	213-424	50	12	8	16 x M8/8
		160	213-425	55	12	8	20 x M8/10


* Tightening torque



CONNECTION ELEMENTS – continued

Set of Stud Screws

	DN ... CF	Part No.	A	Set of	B*
Bolt: stainless steel 316/1.4401	16	213-431	20	6 x M4	4 Nm
Washer: stainless steel 304/1.4301	40	213-432	35	6 x M6	10 Nm
Nut: stainless steel 316/1.4401	63-100	213-433	45	16 x M8	20 Nm



* Tightening torque

Thread Lubricant

	Part No.	Temperature resistance
C100	214-231	1000°C

Remains fully effective for at least 10 bakeout cycles


UHV CF Components

SEALS

Quality copper gaskets and silver plated copper gaskets are strictly designed for use in high-end UHV applications. These gaskets, made of OFHC copper, are inspected, cleaned and individually packed to ensure a high quality level.


Copper Gasket	DN ... CF	Part No.	A	B	C	Set of
High quality	16	213-451	2.1	21.3	16.2	10 pcs.
Copper OFHC -/2.0040	40	213-452	2.1	48.1	39	10 pcs.
	63	213-453	2.1	82.4	63.6	10 pcs.
	100	213-454	2.1	120.5	101.8	10 pcs.
	160	213-455	2.1	171.3	152.6	10 pcs.
	200	213-456	2.1	222.1	203.4	10 pcs.
	250	213-457	2.1	272.9	254.2	5 pcs.
	300	213-458	2.1	326.2	307	1 pcs.
	350	213-459	2.1	376.5	357	1 pcs.

Individually packed




Copper Gasket Silver Plated	DN ... CF	Part No.	A	B	C	Set of
High quality	16	213-461	2.1	21.3	16.2	10 pcs.
Copper OFHC -/2.0040	40	213-462	2.1	48.1	39	10 pcs.
Double silver plated	63	213-463	2.1	82.4	63.6	10 pcs.
	100	213-464	2.1	120.5	101.8	10 pcs.
	160	213-465	2.1	171.3	152.6	5 pcs.
	200	213-466	2.1	222.1	203.4	5 pcs.
	250	213-467	2.1	272.9	254.2	5 pcs.

Individually packed




SEALS – continued

FPM Seal	DN ... CF	Part No.	A	B	C	D	Set of
Elastomer FPM	16	213-391	2	21	16		5 pcs.
	40	213-392	2.5	48.2	42		5 pcs.
	63	213-393	3.2	82.7	69.7	2.5	2 pcs.
	100	213-394	3.2	119.8	107.8	2.5	2 pcs.
	160	213-395	3.2	171.1	156	2.5	2 pcs.
	200	213-396	3.2	222.5	206	2.5	2 pcs.

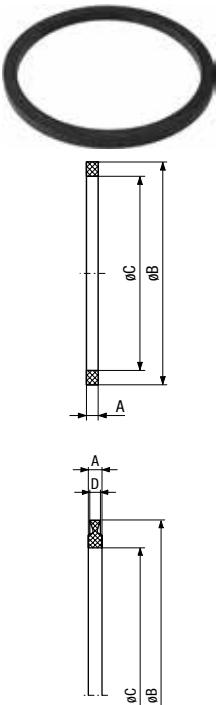

FPM Seal with Support Ring	DN ... CF	Part No.	A	B	C	D	Set of
Seal: elastomer FPM	250	213-397	5	266.5	248.3	256.2	1 pcs.
Support ring: aluminum 6082/-							

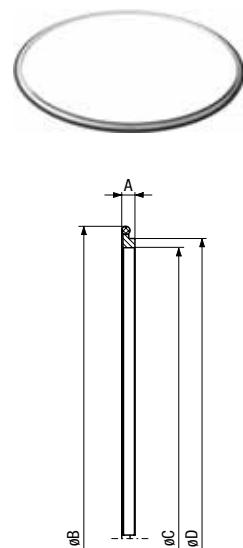


UHV CF Components

FLANGES


Blank Flange

	DN ... CF-F	Part No.	A	B	C
Stainless steel 304/1.4301	16	213-001	7.5	14	1.4
	40	213-002	13	38	1.4
	63	213-003	17.5	66	1.4
	100	213-004	20	104	1.4
	160	213-005	22	155	1.4
	200	213-006	24.5	205	1.4
	250	213-007	2405	256	1.4
Stainless steel 316L/1.4435	300	213-008	28.5	306	1.4
	350	213-009	28.5	356	1.4
Stainless steel 316LN/1.4429	16	213-101	7.5	14	1.4
	40	213-102	13	38	1.4
	63	213-103	17.5	66	1.4
	100	213-104	20	104	1.4
	160	213-105	22	155	1.4
	200	213-106	24.5	205	1.4
	250	213-107	24.5	256	1.4



Blank Flange, Rotatable


	DN ... CF-R	Part No.	A	B	C	D	E
Stainless steel 304/1.4301	16	213-011	7.5	5.8	18.6	14	1.4
	40	213-012	13	7.6	41	38	1.4
	63	213-013	17.5	12.6	71	66	1.4
	100	213-014	20	14.3	109	104	1.4
	160	213-015	22	15.8	160	155	1.4
	200	213-016	24.5	17.1	206	205	1.4
	250	213-017	24.5	18	257	256	1.4
Stainless steel 316LN/1.4429	16	213-111	7.5	5.8	18.6	14	1.4
	40	213-112	13	7.6	41	38	1.4
	63	213-113	17.5	12.6	71	66	1.4
	100	213-114	20	14.3	109	104	1.4
	160	213-115	22	15.8	160	155	1.4
	200	213-116	24.5	17.1	206	205	1.4
	250	213-117	24.5	18	257	256	1.4



FLANGES - continued


Welding Flange

	DN ... CF-F	Part No.	A	B	C	D	E
Stainless steel 304/1.4301	16	213-021	7.5	3.3	17.2	18	1
	40	213-022	13	7.5	39.5	40	1.5
	63	213-023	17.5	8	66	70	2
	100	213-024	20	9	104	108	2
	160	213-025	22	10	155	159	2
	200	213-026	24.5	12	205	205	2.5
	250	213-027	24.5	12	256	256	3
Stainless steel 316L/1.4435	300	213-028	28.5	15.8	306	306	3
	350	213-029	28.5	15.8	356	356	3
Stainless steel 316LN/1.4429	16	213-121	7.5	3.3	17.2	18	1
	40	213-122	13	7.5	39.5	40	1.5
	63	213-123	17.5	8	66	70	2
	100	213-124	20	9	104	108	2
	160	213-125	22	10	155	159	2
	200	213-126	24.5	12	205	205	2.5
	250	213-127	24.5	12	256	256	3

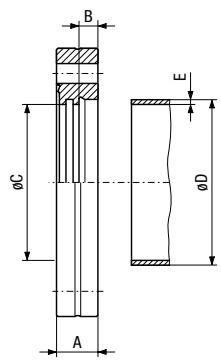

Welding Flange, Rotatable


	DN ... CF-R	Part No.	A	B	C	D	E
Stainless steel 304/1.4301	16	213-041	7.5	3.3	17.2	18	1
	40	213-042	13	7.5	39.5	40	1.5
	63	213-043	17.5	8	66	70	2
	100	213-044	20	9	104	108	2
	160	213-045	22	10	155	159	2
	200	213-046	24.5	12	205	205	2.5
	250	213-047	24.5	12	256	256	3
Stainless steel 316LN/1.4429	16	213-141	7.5	3.3	17.2	18	1
	40	213-142	13	7.5	39.5	40	1.5
	63	213-143	17.5	8	66	70	2
	100	213-144	20	9	104	108	2
	160	213-145	22	10	155	159	2
	200	213-146	24.5	12	205	205	2.5
	250	213-147	24.5	12	256	256	3

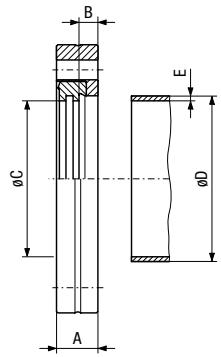

FLANGES - continued


Welding Flange with Tapped Holes

	DN ... CF-F	Part No.	A	B	C	D	E
Stainless steel 304/1.4301	16	213-031	7.5	3.3	17.2	18	1 6xM4
	40	213-032	13	7.5	39.5	40	1.5 6xM6
	63	213-033	17.5	8	66	70	2 8xM8
	100	213-034	20	9	104	108	2 16x M8

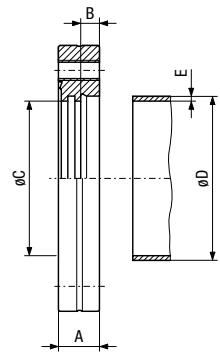

Welding Flange for Gauges


	DN ... CF-F	Part No.	A	B	C	D	E	F	G	F
Stainless steel 304/1.4301	40	213-092	24	17	38	69.5	1.75	48	10	4



FLANGES - continued


Flange with Tube

	DN ... CF-F	Part No.	A	B	C	D
Stainless steel 304/1.4301	16	213-051	38	17.2	18	1
	40	213-052	63	39.5	40	1.6
	63	213-053	105	66	70	2
	100	213-054	135	104	108	2
	160	213-055	167	155	159	2



Flange with Tube, Rotatable


	DN ... CF-R	Part No.	A	B	C	D
Stainless steel 304/1.4301	16	213-061	38	17.2	18	1
	40	213-062	63	39.5	40	1.6
	63	213-063	105	66	70	2
	100	213-064	135	104	108	2
	160	213-065	167	155	159	2



FLANGES - continued

Reducing Flange CF-F/CF-F

	DN ...	CF-F	Part No.	A	B	C	D
Stainless steel 304/1.4301	40/16	213-071	13	16	22	5.5	6xM4
	63/40	213-073	17.5	39	50	9	6xM6
	100/40	213-075	20	39	55	9	6xM6
	100/63	213-076	20	66	85	11	8xM8
	160/40	213-078	22	39	60	9	6xM6
	160/100	213-080	22	104	120	11	16xM8
Stainless steel 316LN/1.4429	40/16	213-171	13	16	22	5.5	6xM4
	63/40	213-173	17.5	39	50	9	6xM6
	100/40	213-175	20	39	55	9	6xM6
	100/63	213-176	20	66	85	11	8xM8
	160/40	213-178	22	39	60	9	6xM6
	160/10	213-180	22	104	120	11	16xM8




UHV CF Components

PIPE FITTINGS


Intermediate Piece

	DN ... CF	Part No.	A	B	C	D
Stainless steel 304/1.4301	16	213-201	76	0.5	0.5	16
	40	213-202	126	1	1	37
	63	213-203	210	1	1	104
	100	213-204	270	1	1	104
	160	213-205	334	1.5	1.5	155



Intermediate Piece, Insulated

	DN ... CF	Part No.	A	B	C	D	E	F	G
Flanges: stainless steel 304/1.4301	40	213-212	70	1	1	25	30	34.5	44
Insulator: ceramic Al ₂ O ₃	63	213-213	90	1	1	53	45	66	65
Transition insulator/flange: FeNi									
Bakeout temperature: 350 °C									




Bakeout temperature: 350 °C

G = Surface leakage 20 kV at 10⁻⁴ mbar

PIPE FITTINGS - continued


Reducer CF/CF

	DN ... CF	Part No.	A	B	C	D
Stainless steel 304/1.4301	40/16	213-221	45	1	1	16
	63/40	213-223	75	1	1	37
	100/40	213-225	75	1	1	37
	100/63	213-226	95	1	1	66
	160/100	213-230	105	1.5	1.5	104

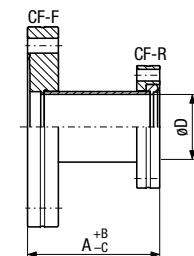


Elbow 90°

	DN ... CF	Part No.	A	B	C	D
Stainless steel 304/1.4301	16	213-301	38	0.5	0.5	15
	40	213-302	63	0.5	0.5	38
	63	213-303	105	1	1	66
	100	213-304	135	1	1	100
	160	213-305	167	1.5	1.5	150

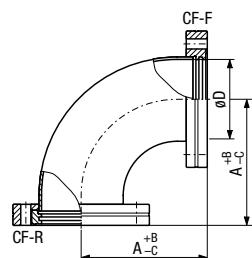

TEE


	DN ... CF	Part No.	A	B	C	D
Stainless steel 304/1.4301	16	213-311	38	0.5	0.5	15
	40	213-312	63	0.5	0.5	38
	63	213-313	105	1	1	66
	100	213-314	135	1	1	100
	160	213-315	167	1.5	1.5	150

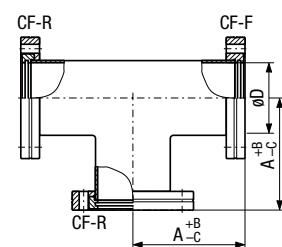

PIPE FITTINGS - continued

Cross

	DN ... CF	Part No.	A	B	C	D
Stainless steel 304/1.4301	16	213-321	38	0.5	0.5	15
	40	213-322	63	0.5	0.5	38
	63	213-323	105	1	1	66
	100	213-324	135	1	1	100
	160	213-325	167	1.5	1.5	150

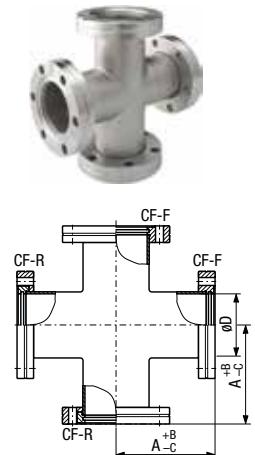

Double Cross Piece


	DN ... CF	Part No.	A	B	C	D
Stainless steel 304/1.4301	40	213-332	63	0.5	0.5	38
	63	213-333	105	1	1	66
	100	213-334	135	1	1	100
	160	213-335	167	1.5	1.5	150



3 x rotatable flanges
3 x fix flanges

Reducing Cross

	DN ... CF	Part No.	A	B	C	D	E	F
Stainless steel 304/1.4301	100	213-342	135	1	1	67.5	106	84

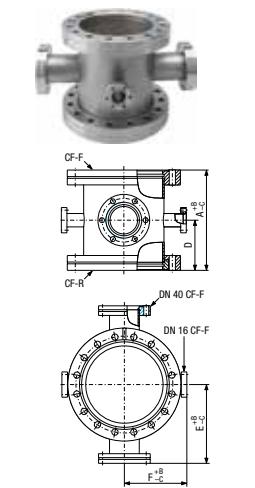

2 x DN 16 CF-F
2 x DN 40 CF-F


UHV CF Components

BELLOWS / HOSE WITH FLANGES, COMPENSATOR

Compensator

	DN...CF	Part No.	A	B	C	D	E	F	G
Flanges: stainless steel 304/1.4301	40	213-346	120	10	0	36.8	100	10	10°
Bellows: stainless steel 316Ti/1.4571	63	213-347	130	20	0	62	154	13	12°
	100	213-348	127	30	0	93	192	13	12°

Max. internal pressure for DN 40: 4 bar
 Max. internal pressure for DN 63/100: 1.5 bar

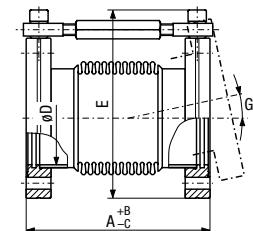


Bellows

	DN...CF	Part No.	A	B	C	D	E	F	G
Flanges: stainless steel 304/1.4301	16	213-351	76	1.5	1.5	15	22	16	21°
Bellows: stainless steel 316Ti/1.4571	40	213-352	126	2	2	40	55	36.8	7.5°
	63	213-353	139	2	2	62	80	66	37°
	100	213-354	142	2	2	92	116	102	28°
	160	213-355	250	3	3	154	187	153	16°

A = unstressed length

Max. internal pressure for DN 40: 4 bar
 Max. internal pressure for DN 63 ... 106: 1.5 bar




Flexible Metal Hose

	DN...CF	Part No.	A	B	C	D	E	F	G
Flanges: stainless steel 304/1.4301	16	213-361	250	23	16	15	22.5	70	50
Bellows: stainless steel 316Ti/1.4571	16	213-362	500	23	16	15	22.5	70	50
	16	213-363	750	23	16	15	22.5	70	50
	16	213-364	1000	23	16	15	22.5	70	50
	40	213-365	250	46	36.8	40.5	53	130	100
	40	213-366	500	46	36.8	40.5	53	130	100
	40	213-368	1000	46	36.8	40.5	53	130	100

F = radius for multible bending

G = radius for single bending

Max. internal pressure: 5 bar




UHV CF Components

TRANSITION PIECES


Adaptor CF-F/ISO-KF

	DN...CF-F	Part No.	A	B
Stainless steel 304/1.4301	16/16	213-251	35	16
	16/25	213-252	35	16
	40/16	213-254	30	16
	40/25	213-255	30	26
	40/40	213-256	50	37
	63/40	213-259	35	41
	100/40	213-262	50	41



Adaptor CF-F/ISO-K


	DN ... CF-F	Part No.	A	B	C	D
Stainless steel 304/1.4301	63/63	213-271	90	1	1	66
	100/100	213-272	90	1	1	104
	160/160	213-273	90	1.5	1.5	153



UHV CF Components

PROTECTIVE LIDS

Protective Lids	DN ... CF	Part No.	A	B	C
Polyethylene	16	213-441	36	34	9.5
	40	213-442	71.5	69.5	17.5
	63	213-443	115.5	113.5	22
	100	213-444	154	152	24.5
	160	213-445	205	202.5	27
	200	213-446	263	254	36
	250	213-447	315	306	36





www.inficon.com reachus@inficon.com

Due to our continuing program of product improvements, specifications are subject to change without notice.

tilc85e1-i ©2012 INFICON