



Visionary Sensor Technology



Stripe™

CDG045Dhs, CDG100Dhs,
CDG160Dhs, CDG200Dhs
High Speed Vacuum Gauge

Smart Inside – Fast Outside

Stripe CDG045Dhs, CDG100Dhs, CDG160Dhs, CDG200Dhs Vacuum Gauge



INFICON Stripe high-speed Capacitance Diaphragm Gauges are the fastest, highly accurate vacuum measurement instruments available. With a less than 1 ms response time combined with the EtherCAT fieldbus interface it opens up a total new field of applications. The proven temperature controlled, corrosion resistant, ultra-pure ceramic sensor provides superior span stability over many years paired with state-of-the-art zero stability.


Stripe comes with the INFICON patented unique sensor shield which protects the gauge from undesired process by-products.

INFICON Stripe using an innovative heating concept, which provides a cool to the touch surface, and its unique speed capabilities, enabling an unprecedented productivity increase, making it the most advanced vacuum instrument of its kind.


- Typical applications**
 - Atomic layer deposition
 - PVD, CVD, Etch

- High speed process control
 - General high temperature vacuum applications

CDG working principle

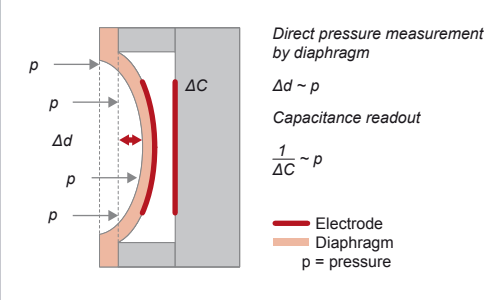


Advanced heating concept

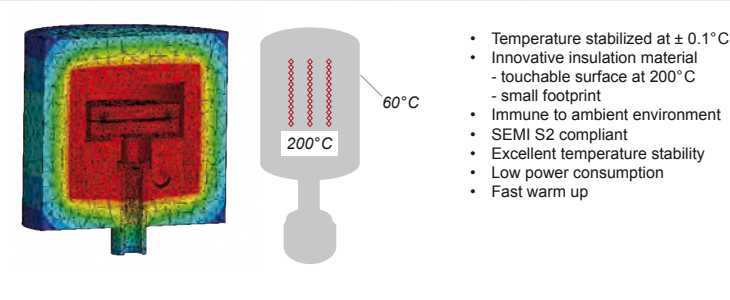


Flexible integration fast readout



Higher productivity

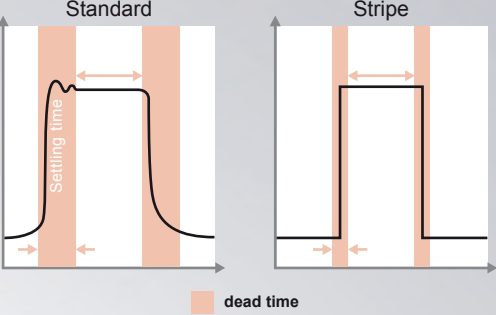

Enabling process innovation

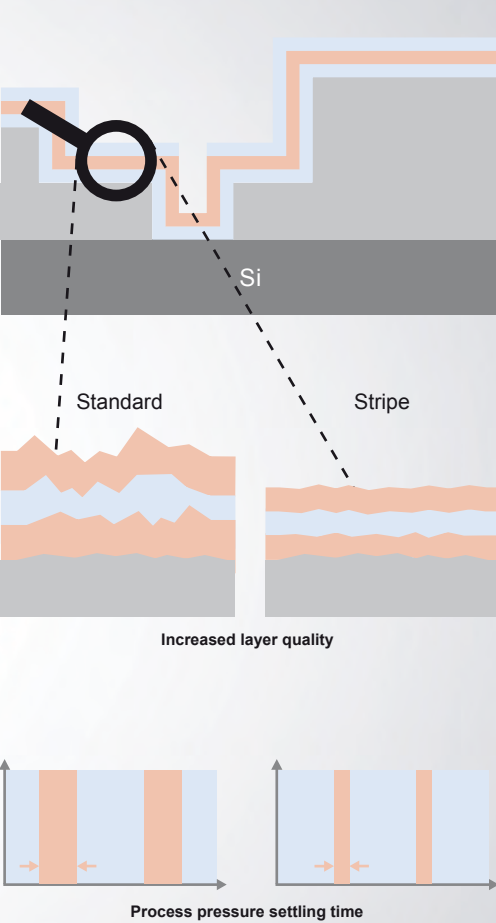

Fully ceramic sensor


Bonded ceramic structure combined with digital signal processing provides superior measurement performance.




Gauge protection for increased lifetime

Level 1	Baffle Stops coating, particles
Level 2	Heater Prevents condensation/deposition
Level 3	Shield Protects diaphragm
Level 4	Protective coating Corrosion protection

Any mounting orientation

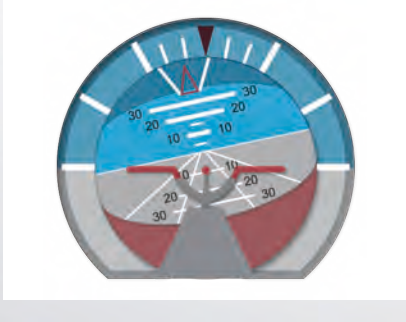

Low noise/Advanced Pressure Control

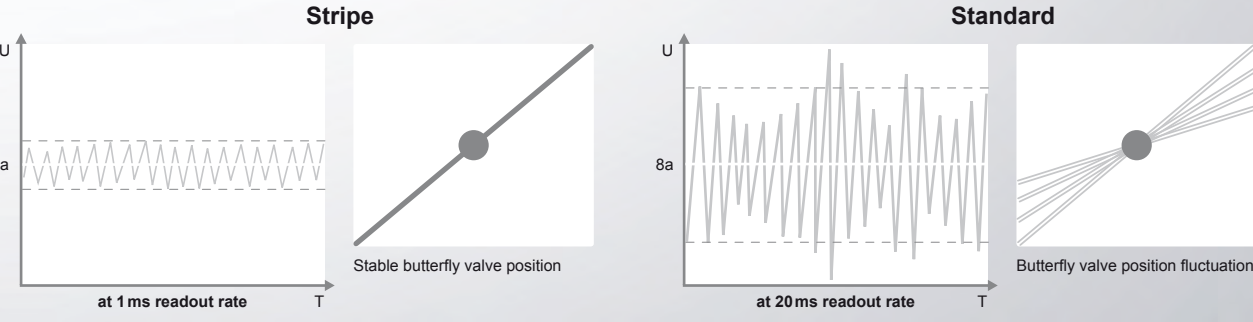


STRIPE ADVANTAGES AT A GLANCE

- High productivity – Faster than 1 ms response time
- Flexible integration – EtherCAT fieldbus
- Long lifetime – Proven ceramic sensor
- Forget recalibration – 90 ppm/year full scale stability


Diaphragm flexibility



Speed/Noise performance

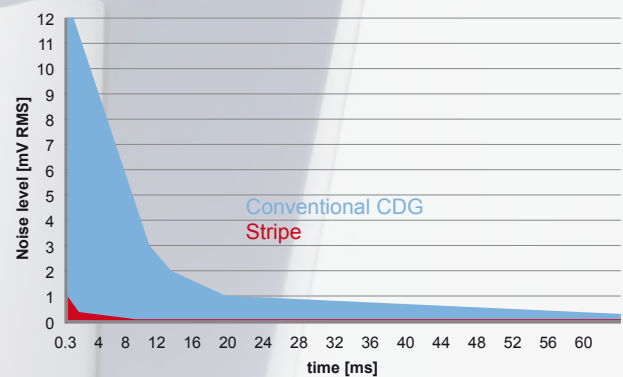

Measurement ranges

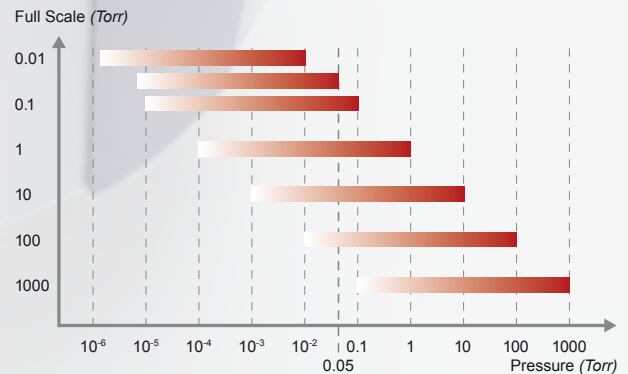

Real 10 mTorr.
Identify the new 10 mTorr
fullscale Stripe



EXCELLENT CUSTOMER SUPPORT IS A COMMITMENT

INFICON provides a global network of sales and service centers. These centers are staffed with local service and application experts who can assist you in choosing the best solution for your individual product application and provide fast support if service is needed.



Americas

INFICON Inc.
East Syracuse, NY
Phone: +1.315.434.1100
E-mail: reach.us@inficon.com

Europe, Middle East and Africa

INFICON GmbH
Cologne
Phone: +49.221.567.881.00
E-mail: reach.germany@inficon.com

Asia and Pacifica

CHINA
INFICON Ltd.
Beijing
Phone: +86.10.6590.0164
E-mail: reach.china@inficon.com

INDIA
INFICON PVT. Ltd.
Pune
Phone: +91.20.4120.4854
E-mail: reach.india@inficon.com

JAPAN
INFICON Co. Ltd.
Kawasaki-shi, Kanagawa-ken
Phone: +81.44.822.1111
E-mail: reach.japan@inficon.com

KOREA
INFICON Ltd.
Kyunggi-do
Phone: +82.31.783.2942
E-mail: reach.korea@inficon.com

SINGAPORE and AUSTRALIA
INFICON PTE Ltd.
Singapore
Phone: +65.6631.0300
E-mail: reach.singapore@inficon.com

TAIWAN
INFICON Co. Ltd.
Chupei City
Phone: +886.3.552.5828
E-mail: reach.taiwan@inficon.com



inficon.com reachus@inficon.com twitter.com/inficon

Due to our continuing program of product improvements, specifications are subject to change without notice.

tibc50e1-a ©2014 INFICON